SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF, AMD Opteron 6176 SE

SPECint®2006 = 21.4

SPECint_base2006 = 16.7

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2010
Hardware Availability: Mar-2010
Software Availability: May-2010

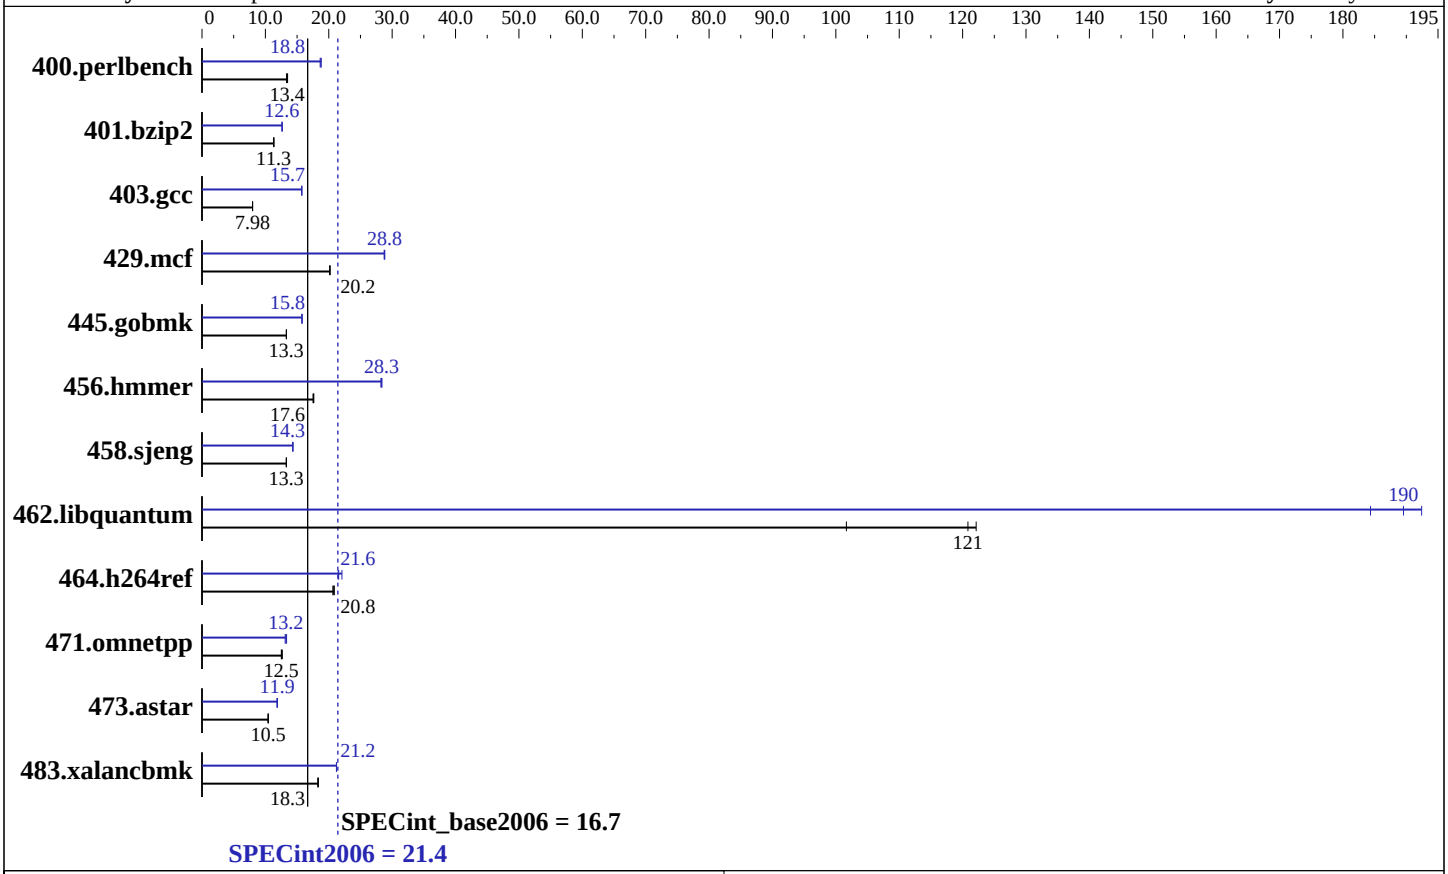

Hardware

CPU Name:	AMD Opteron 6176 SE
CPU Characteristics:	
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache:	None
Memory:	64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.5, Kernel 2.6.18-194.el5
Compiler:	x86 Open64 4.2.3.2 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF, AMD Opteron 6176 SE

SPECint2006 = 21.4

SPECint_base2006 = 16.7

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2010
Hardware Availability: Mar-2010
Software Availability: May-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**727**	**13.4**	723	13.5	733	13.3	**521**	**18.8**	520	18.8	524	18.6
401.bzip2	853	11.3	**853**	**11.3**	850	11.4	**763**	**12.6**	765	12.6	763	12.7
403.gcc	1009	7.98	1010	7.97	**1009**	**7.98**	511	15.8	**512**	**15.7**	512	15.7
429.mcf	451	20.2	453	20.1	**452**	**20.2**	317	28.7	316	28.8	**317**	**28.8**
445.gobmk	787	13.3	789	13.3	**787**	**13.3**	665	15.8	665	15.8	**665**	**15.8**
456.hmmer	529	17.6	532	17.5	**531**	**17.6**	329	28.4	331	28.2	**329**	**28.3**
458.sjeng	909	13.3	**909**	**13.3**	910	13.3	**844**	**14.3**	845	14.3	844	14.3
462.libquantum	**171**	**121**	204	102	170	122	**109**	**190**	112	184	108	192
464.h264ref	1060	20.9	1072	20.6	**1065**	**20.8**	**1026**	**21.6**	1002	22.1	1029	21.5
471.omnetpp	493	12.7	499	12.5	**499**	**12.5**	**472**	**13.2**	468	13.3	476	13.1
473.astar	671	10.5	**671**	**10.5**	674	10.4	**591**	**11.9**	593	11.8	590	11.9
483.xalancbmk	376	18.3	**376**	**18.3**	378	18.3	325	21.2	325	21.2	**325**	**21.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=4000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-speed-libs-revA/64:/usr/cpu2006/amd1002-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23"
O64_OMP_SPIN_USER_LOCK = "true"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -apo -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m,limit=450 -LNO:parallel_overhead=10000

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
-OPT:alias=disjoint -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:local_sched_alg=1 -CG:cflow=0
-CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
-HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -IPA:min_hotness=32 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -apo -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-OPT:alias=disjoint -INLINE:aggressive=on -IPA:space=1000
-IPA:plimit=20000 -mso

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-WOPT:if_conv=0 -m32 -HP:bdt=2m:heap=2m

473.astar: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html
http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml
http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:51:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.