SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL585 G7
(2.5 GHz AMD Opteron 6180 SE)

SPECint®_rate2006 = 825

SPECint_rate_base2006 = 722

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2011
Hardware Availability: Feb-2011
Software Availability: Aug-2010

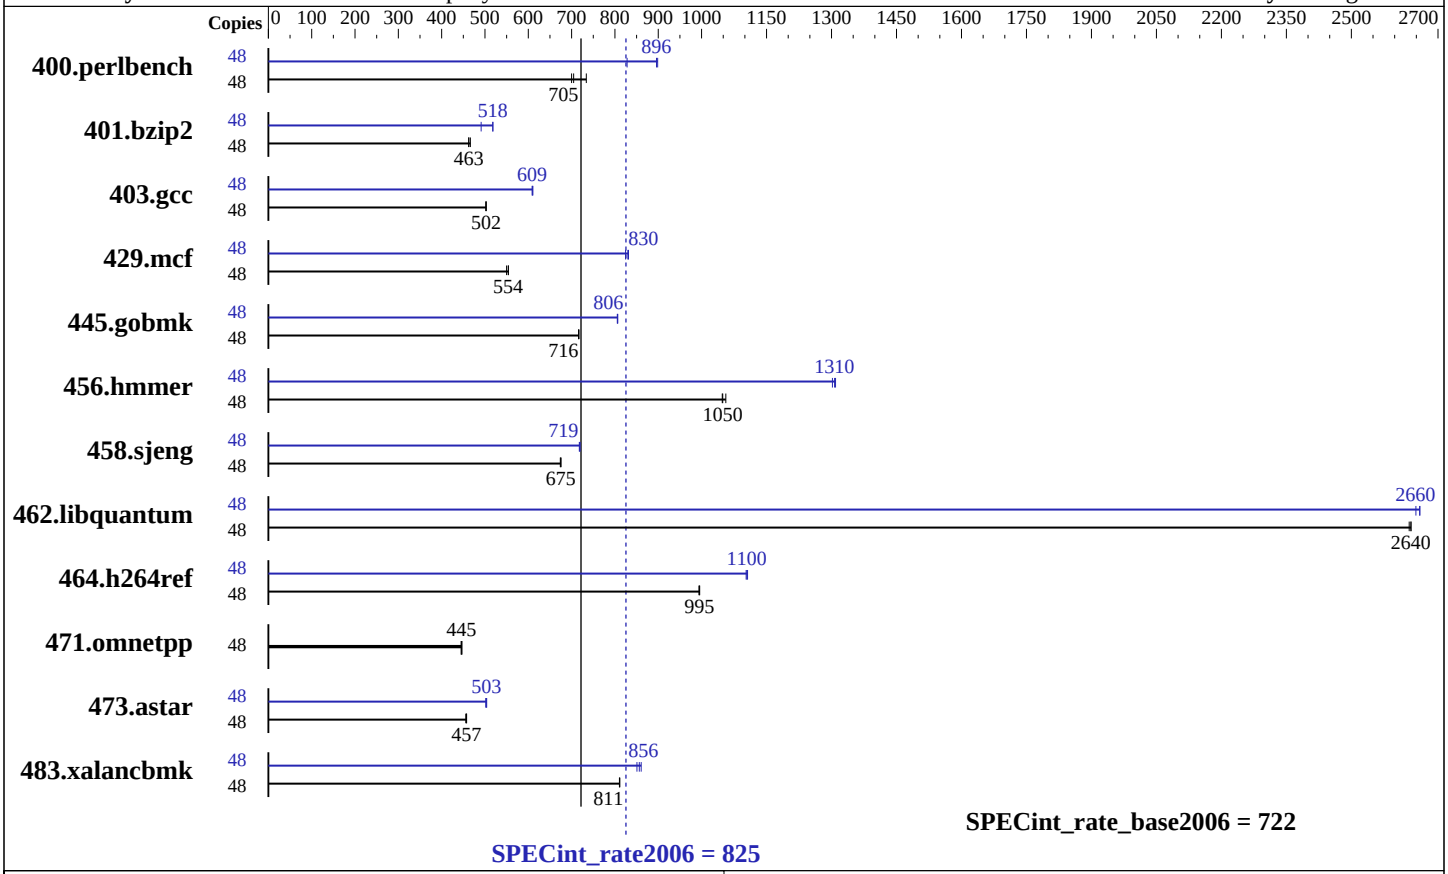

Hardware

CPU Name:	AMD Opteron 6180 SE
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache:	None
Memory:	128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	2 x 146 GB 10 K SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1 Kernel 2.6.32.12-0.7-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL585 G7
(2.5 GHz AMD Opteron 6180 SE)

SPECint_rate2006 = 825

SPECint_rate_base2006 = 722

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2011
Hardware Availability: Feb-2011
Software Availability: Aug-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	639	734	670	700	**665**	**705**	48	566	828	**523**	**896**	522	899
401.bzip2	48	1002	462	993	466	**1001**	**463**	48	943	491	893	518	**894**	**518**
403.gcc	48	769	503	**769**	**502**	769	502	48	**634**	**609**	633	611	634	609
429.mcf	48	796	550	**790**	**554**	790	554	48	531	825	**528**	**830**	527	831
445.gobmk	48	703	716	703	717	**703**	**716**	48	625	806	624	807	**625**	**806**
456.hmmer	48	427	1050	**427**	**1050**	424	1060	48	342	1310	**343**	**1310**	344	1300
458.sjeng	48	860	675	**860**	**675**	862	674	48	807	719	809	718	**808**	**719**
462.libquantum	48	378	2630	**377**	**2640**	377	2640	48	374	2660	375	2650	**374**	**2660**
464.h264ref	48	1067	996	**1068**	**995**	1069	994	48	**962**	**1100**	963	1100	960	1110
471.omnetpp	48	**674**	**445**	671	447	674	445	48	**674**	**445**	671	447	674	445
473.astar	48	740	456	736	458	**737**	**457**	48	672	502	669	504	**670**	**503**
483.xalancbmk	48	409	810	**408**	**811**	408	811	48	389	851	385	861	**387**	**856**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=21600 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
BIOS Configuration:
  HP Power Profile set to Maximum Performance
  Thermal Configuration set to Increased Cooling
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd1002mc-rate-libs-revC/64:/cpu2006/amd1002mc-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
-OPT:alias=disjoint -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:local_sched_alg=1 -CG:cflow=0
-CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
-HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html
http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml
http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 15:12:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 February 2011.