SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon X5690)

SPECfp®_rate2006 = 266

SPECfp_rate_base2006 = 260

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Mar-2011
Hardware Availability: Mar-2011
Software Availability: Jan-2011

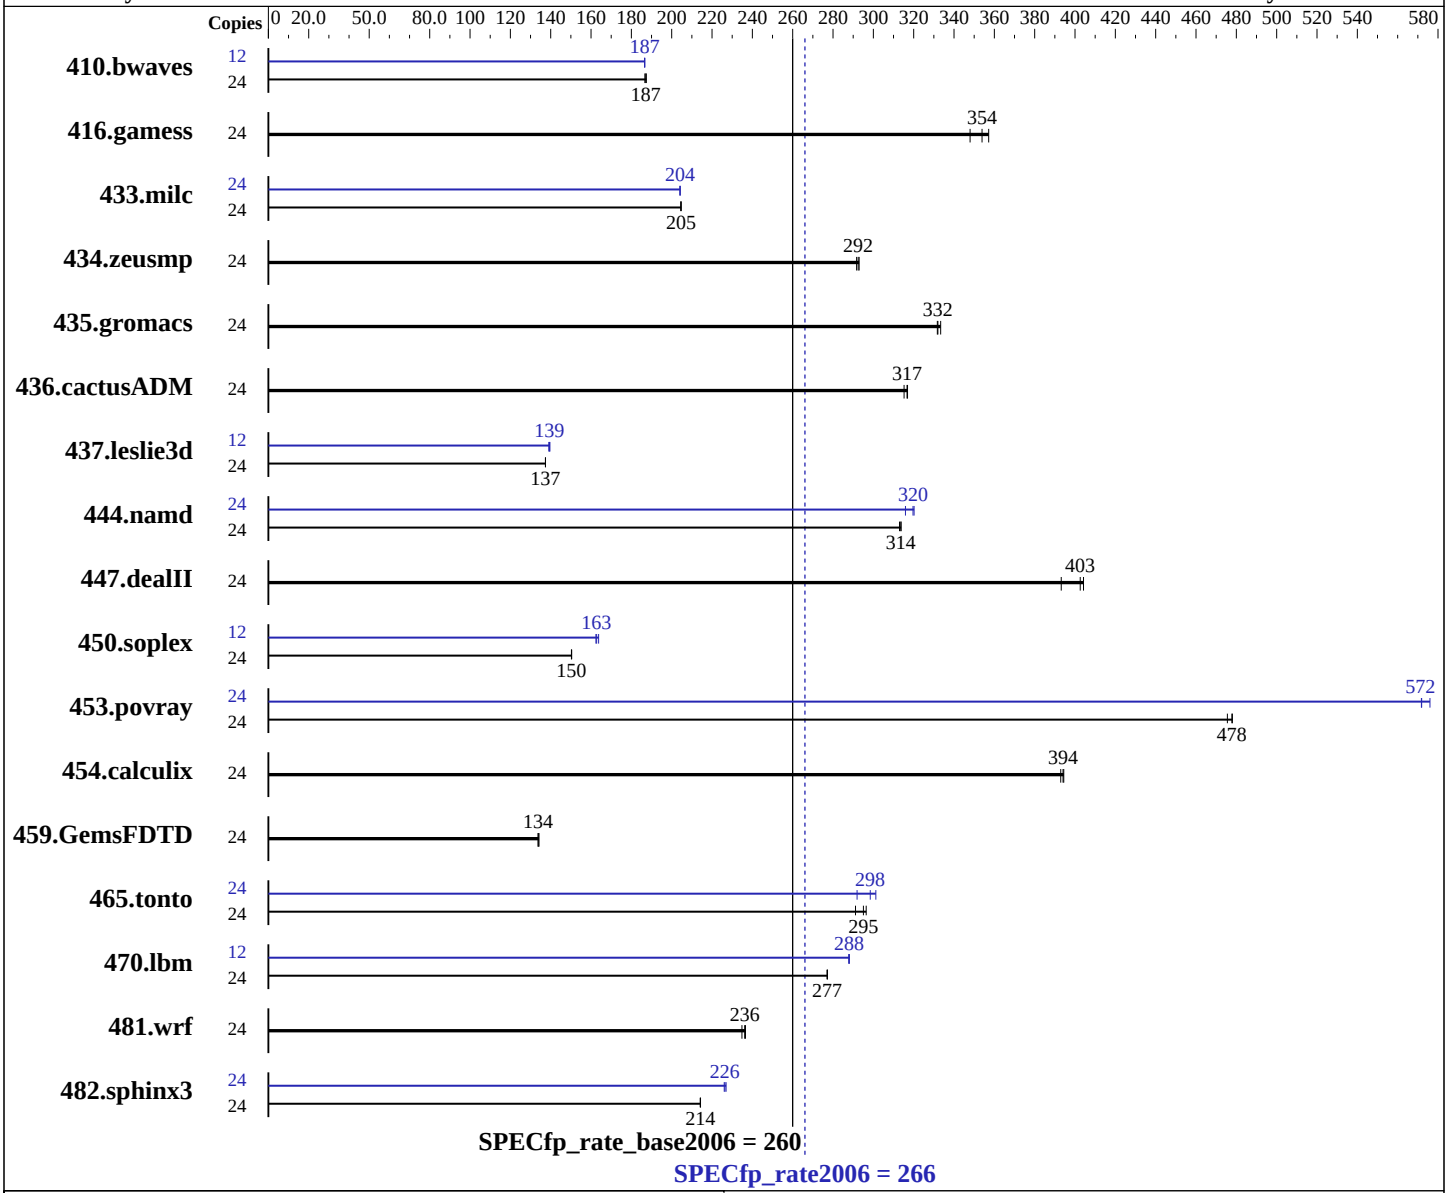

Hardware

CPU Name:	Intel Xeon X5690
CPU Characteristics:	Intel Turbo Boost Technology up to 3.73 GHz
CPU MHz:	3466
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.4.3, Advanced Platform, Kernel 2.6.18-164.9.1.el5 on an x86_64
Compiler:	Intel C++ Compiler XE for Linux Version 12.0.2.137 Build 20110112 Intel Fortran Compiler XE for Linux Version 12.0.2.137 Build 20110112
Auto Parallel:	No
File System:	ext3

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon X5690)

SPECfp_rate2006 = 266

SPECfp_rate_base2006 = 260

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Mar-2011
Hardware Availability: Mar-2011
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 1333 MHz)
Disk Subsystem: 2 x 146 GB 10000 rpm Fibre Channel RAID1 configuration
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1740	187	**1743**	**187**	1747	187	12	874	187	874	187	**874**	**187**
416.gamess	24	**1328**	**354**	1350	348	1316	357	24	**1328**	**354**	1350	348	1316	357
433.milc	24	1077	205	1076	205	**1077**	**205**	24	1079	204	**1079**	**204**	1079	204
434.zeusmp	24	749	292	**747**	**292**	746	293	24	749	292	**747**	**292**	746	293
435.gromacs	24	514	333	517	332	**516**	**332**	24	514	333	517	332	**516**	**332**
436.cactusADM	24	**906**	**317**	910	315	905	317	24	**906**	**317**	910	315	905	317
437.leslie3d	24	**1642**	**137**	1642	137	1642	137	12	811	139	**809**	**139**	808	140
444.namd	24	613	314	615	313	**614**	**314**	24	**602**	**320**	609	316	601	320
447.dealII	24	679	404	**682**	**403**	698	393	24	679	404	**682**	**403**	698	393
450.soplex	24	1331	150	**1331**	**150**	1332	150	12	**615**	**163**	616	162	611	164
453.povray	24	**267**	**478**	268	476	267	478	24	**223**	**572**	223	572	222	576
454.calculix	24	**502**	**394**	504	393	502	394	24	**502**	**394**	504	393	502	394
459.GemsFDTD	24	**1903**	**134**	1904	134	1897	134	24	**1903**	**134**	1904	134	1897	134
465.tonto	24	797	296	811	291	**800**	**295**	24	**791**	**298**	809	292	784	301
470.lbm	24	1189	277	**1190**	**277**	1190	277	12	572	288	**573**	**288**	573	288
481.wrf	24	1133	237	**1135**	**236**	1142	235	24	1133	237	**1135**	**236**	1142	235
482.sphinx3	24	2184	214	2183	214	**2184**	**214**	24	**2066**	**226**	2061	227	2069	226

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 '/usr/bin/numactl' used to bind processes to CPUs
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Large pages were disabled for this run
```

Platform Notes

```
BIOS Settings:
Data Reuse Optimization = Disabled
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/PlatformHitachi.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/PlatformHitachi.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 19:11:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 April 2011.