SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BLB3 Motherboard (Intel Core i3-2100)

SPECint®_rate2006 = 75.3

SPECint_rate_base2006 = 70.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

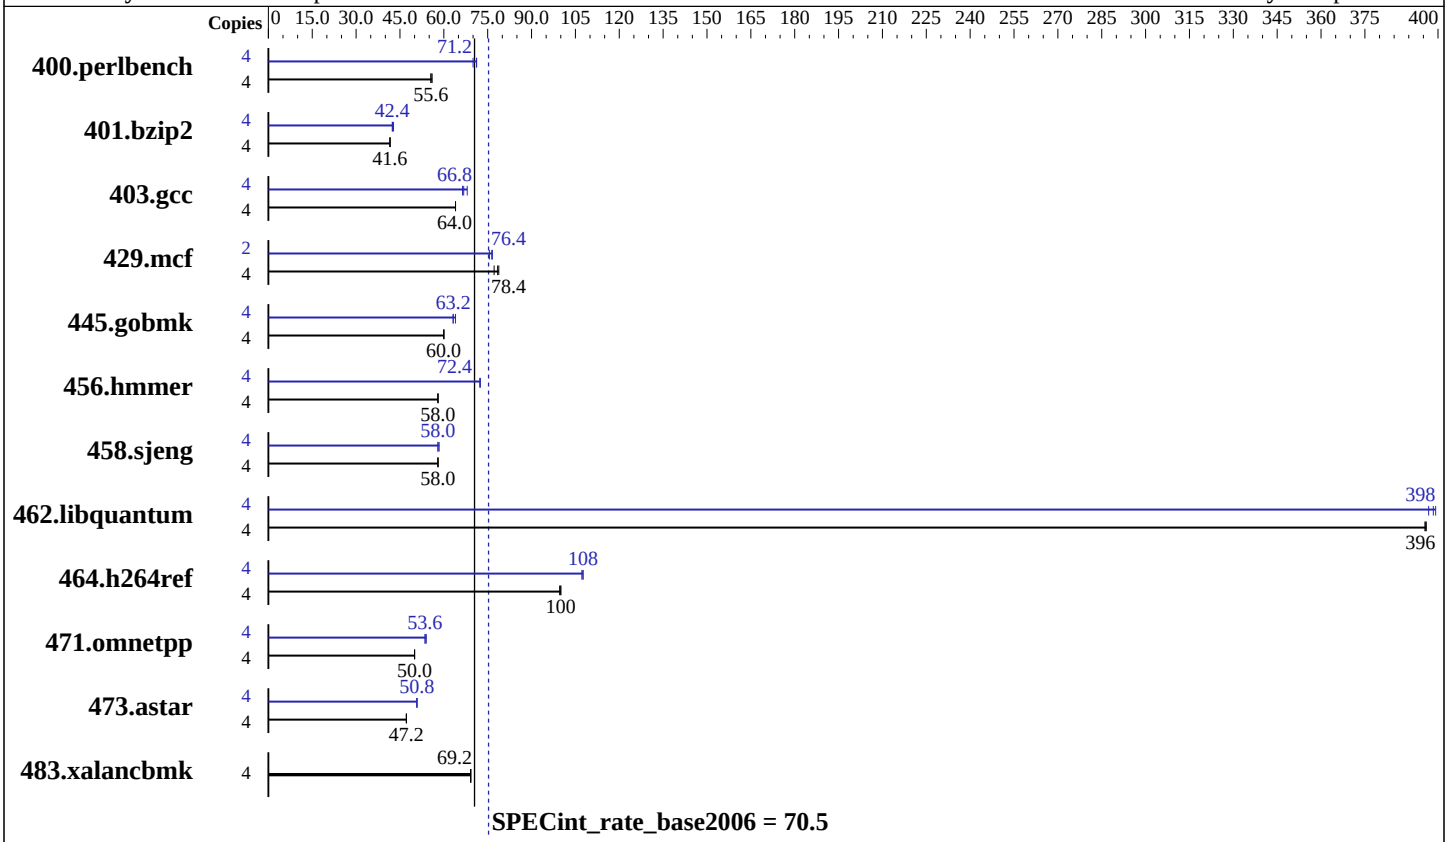

Hardware

CPU Name:	Intel Core i3-2100
CPU Characteristics:	
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx8 PC3-10600U-9)
Disk Subsystem:	Seagate 1 TB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.163 Build 20110217 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 9.01 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BLB3 Motherboard (Intel Core i3-2100)

SPECint_rate2006 = 75.3

SPECint_rate_base2006 = 70.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	**702**	**55.6**	704	55.6	700	56.0	4	**549**	**71.2**	558	70.0	549	71.2
401.bzip2	4	**929**	**41.6**	929	41.6	928	41.6	4	901	42.8	**907**	**42.4**	914	42.4
403.gcc	4	505	64.0	502	64.0	**503**	**64.0**	4	475	68.0	**482**	**66.8**	484	66.4
429.mcf	4	463	78.8	472	77.2	**465**	**78.4**	2	241	75.6	**239**	**76.4**	238	76.6
445.gobmk	4	**700**	**60.0**	699	60.0	701	60.0	4	664	63.2	**662**	**63.2**	654	64.0
456.hmmer	4	**643**	**58.0**	643	58.0	643	58.0	4	**515**	**72.4**	514	72.4	515	72.4
458.sjeng	4	**834**	**58.0**	833	58.0	834	58.0	4	826	58.4	834	58.0	**833**	**58.0**
462.libquantum	4	**209**	**396**	209	396	210	396	4	**208**	**398**	208	399	209	397
464.h264ref	4	889	99.6	**887**	**100**	887	100	4	825	107	822	108	**822**	**108**
471.omnetpp	4	**500**	**50.0**	500	50.0	499	50.0	4	466	53.6	464	54.0	**465**	**53.6**
473.astar	4	**593**	**47.2**	594	47.2	593	47.2	4	551	50.8	**551**	**50.8**	552	50.8
483.xalancbmk	4	399	69.2	**399**	**69.2**	399	69.2	4	399	69.2	**399**	**69.2**	399	69.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
The start command with the /affinity switch was used to bind processes to cores
```

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

C++ benchmarks:
```
-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlW32M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icl -Qvc9 -Qstd=c99
```

456.hmmer: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

458.sjeng: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

462.libquantum: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe -Qstd=c99`

C++ benchmarks (except as noted below):
```
icl -Qvc9
```

473.astar: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
456.hmmer: `-DSPEC_CPU_P64`
458.sjeng: `-DSPEC_CPU_P64`
462.libquantum: `-DSPEC_CPU_P64`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
473.astar: `-DSPEC_CPU_P64`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

458.sjeng: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

464.h264ref: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

456.hmmer: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110511.html
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110511.xml
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:56:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 May 2011.