



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®2006 = 47.2

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

SPECfp_base2006 = 45.5

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Apr-2011

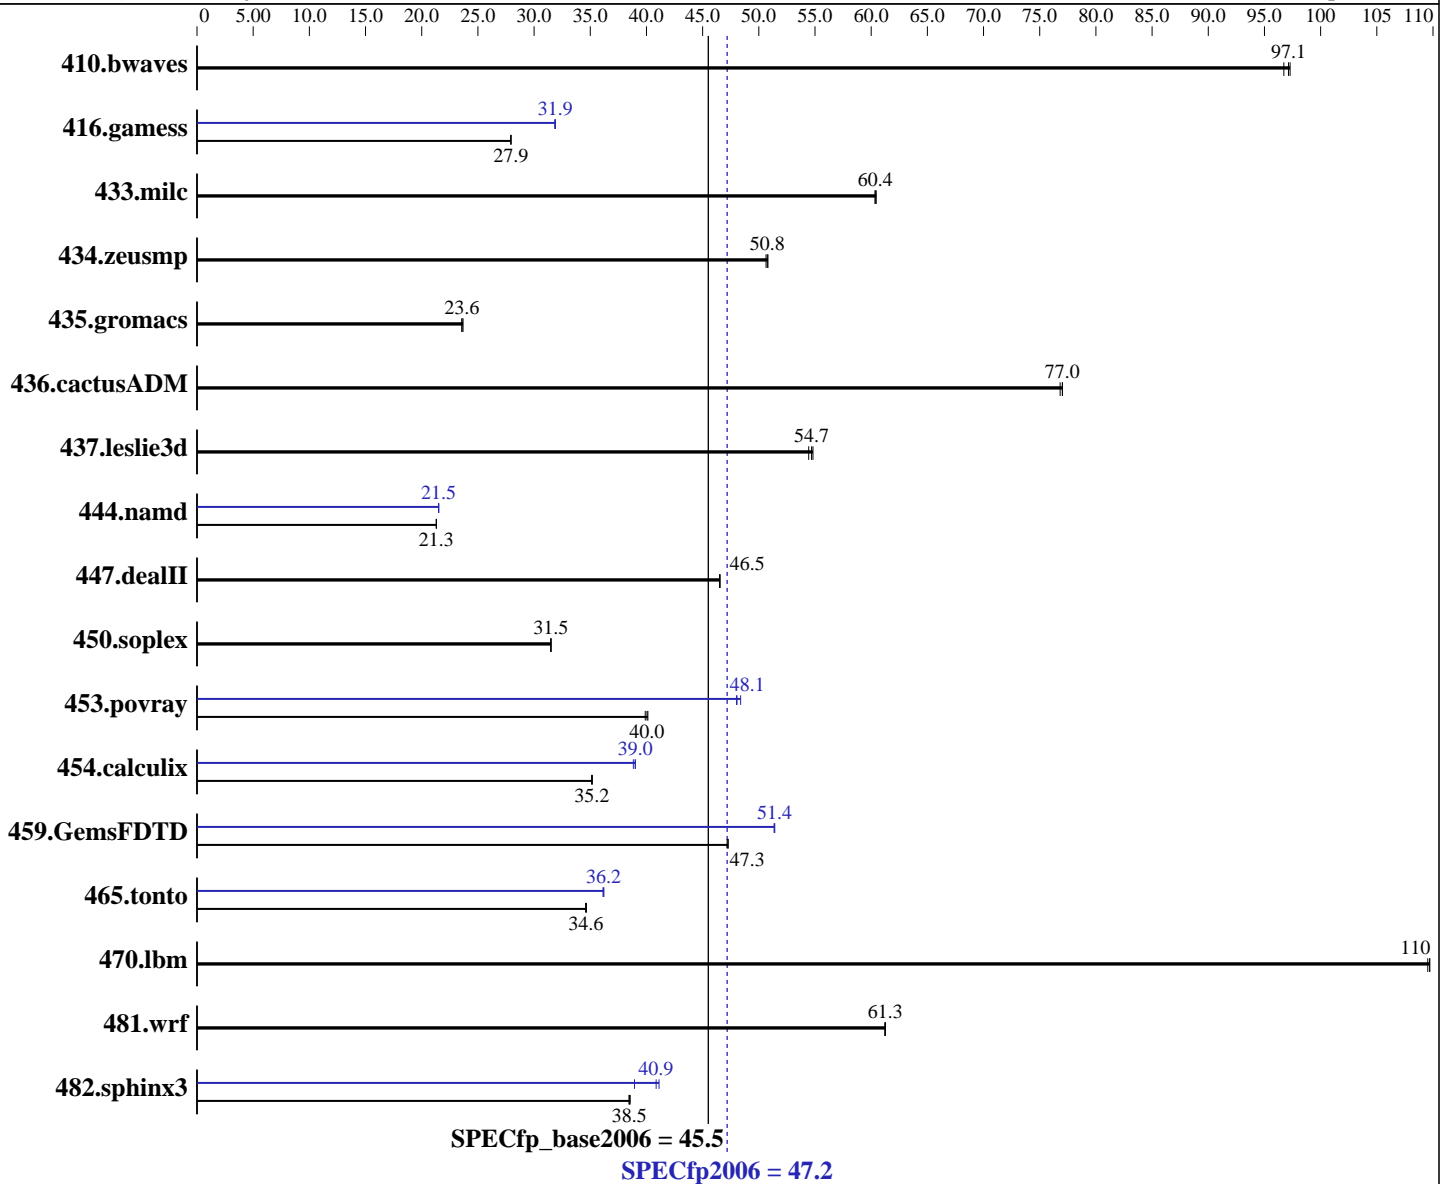

Hardware

CPU Name: Intel Core i3-2100
 CPU Characteristics:
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 47.2

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

SPECfp_base2006 = 45.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Apr-2011

L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)
Disk Subsystem: 1 x SATA, 300 GB, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	140	96.7	140	97.1	140	97.3	140	96.7	140	97.1	140	97.3
416.gamess	701	27.9	701	27.9	701	27.9	614	31.9	615	31.8	614	31.9
433.milc	152	60.3	152	60.4	152	60.4	152	60.3	152	60.4	152	60.4
434.zeusmp	180	50.6	179	50.8	179	50.8	180	50.6	179	50.8	179	50.8
435.gromacs	302	23.7	303	23.6	303	23.6	302	23.7	303	23.6	303	23.6
436.cactusADM	156	76.8	155	77.0	155	77.0	156	76.8	155	77.0	155	77.0
437.leslie3d	173	54.4	171	54.8	172	54.7	173	54.4	171	54.8	172	54.7
444.namd	376	21.3	376	21.3	377	21.3	373	21.5	373	21.5	373	21.5
447.dealII	246	46.5	246	46.5	246	46.5	246	46.5	246	46.5	246	46.5
450.soplex	265	31.5	265	31.5	265	31.5	265	31.5	265	31.5	265	31.5
453.povray	133	39.9	133	40.0	133	40.1	110	48.4	111	48.1	111	48.0
454.calculix	235	35.1	235	35.2	234	35.2	211	39.0	212	39.0	212	38.8
459.GemsFDTD	224	47.3	225	47.2	224	47.3	206	51.4	206	51.4	207	51.4
465.tonto	284	34.7	284	34.6	285	34.6	272	36.2	272	36.1	272	36.2
470.lbm	125	110	125	110	125	110	125	110	125	110	125	110
481.wrf	182	61.3	183	61.2	182	61.3	182	61.3	183	61.2	182	61.3
482.sphinx3	506	38.5	507	38.4	506	38.6	474	41.1	477	40.9	501	38.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodetv /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS configuration:
Intel HT Technology = Disable



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 47.2

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

SPECfp_base2006 = 45.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Apr-2011

General Notes

OMP_NUM_THREADS set to number of cores

For information about Fujitsu please visit: <http://www.fujitsu.com>

Binaries were compiled on RHEL5.5

This result was measured on the PRIMERGY TX140 S1. The PRIMERGY TX120 S3 and the PRIMERGY TX140 S1 are electronically equivalent.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 47.2

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

SPECfp_base2006 = 45.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Apr-2011

Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 47.2

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

SPECfp_base2006 = 45.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 47.2

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

SPECfp_base2006 = 45.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 18:32:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 June 2011.