SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS22 (Intel Xeon E5603)

SPECfp®2006 = 31.0

SPECfp_base2006 = 29.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

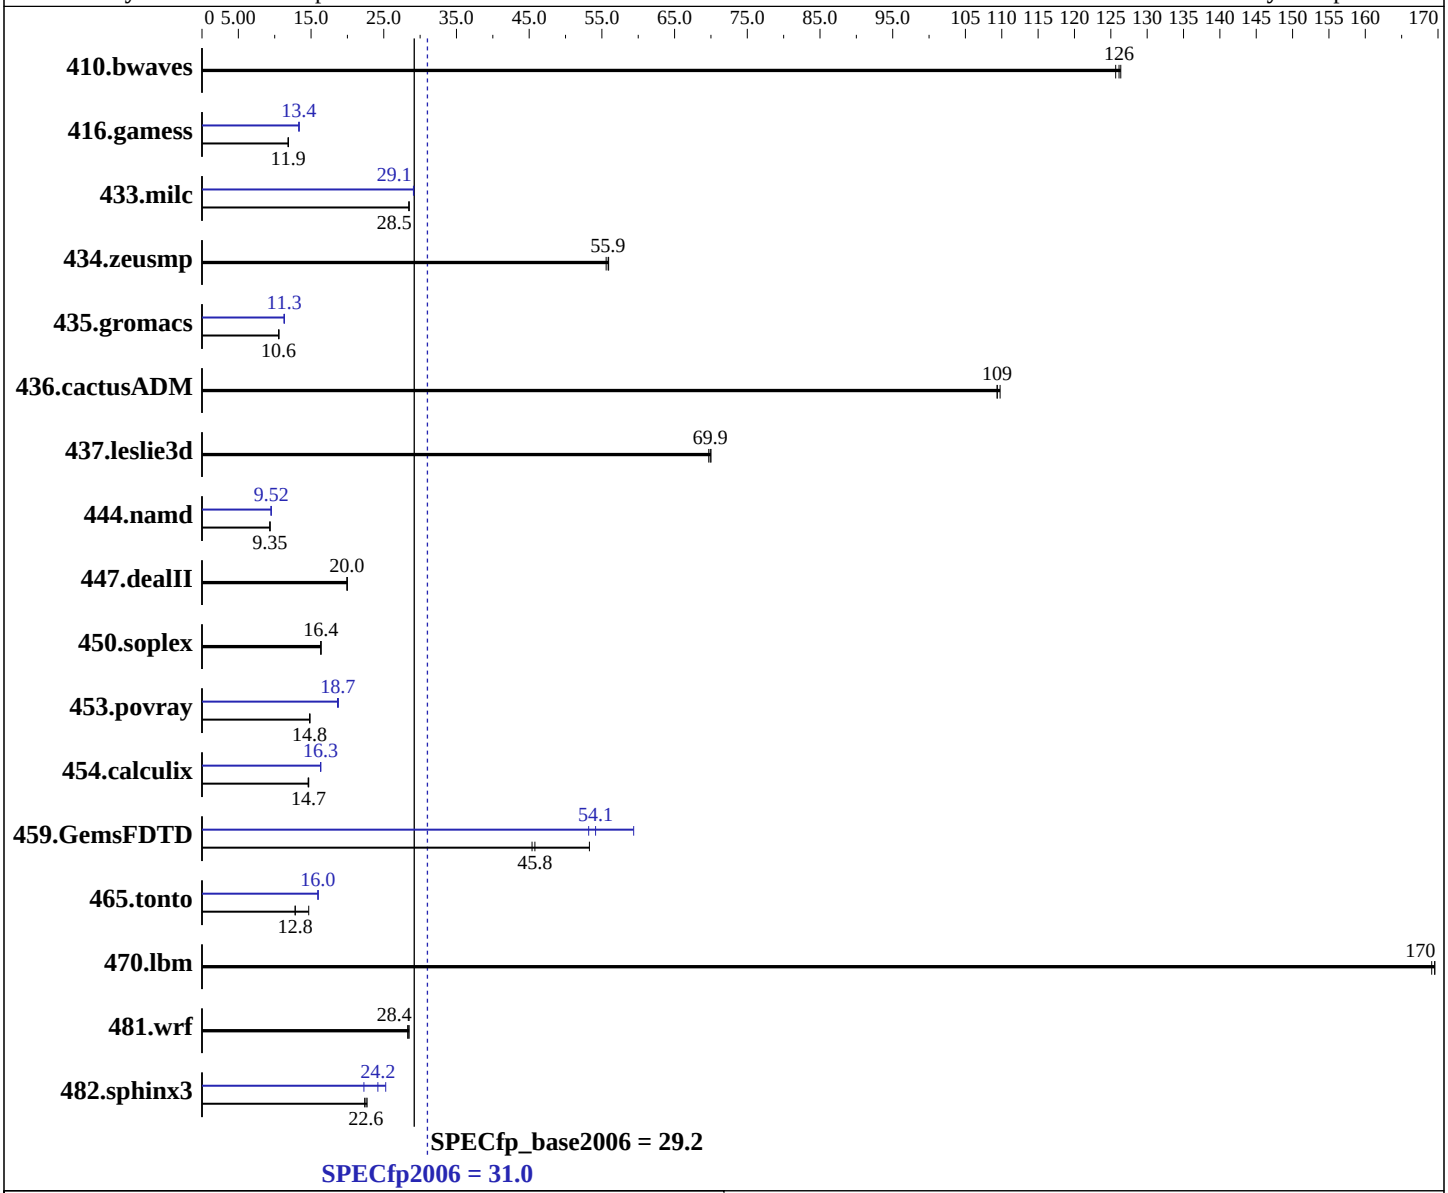

Hardware

CPU Name:	Intel Xeon E5603
CPU Characteristics:	
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS22 (Intel Xeon E5603)

SPECfp2006 = 31.0

SPECfp_base2006 = 29.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	108	126	108	126	**108**	**126**	108	126	108	126	**108**	**126**
416.gamess	**1652**	**11.9**	1646	11.9	1652	11.9	**1466**	**13.4**	1471	13.3	1465	13.4
433.milc	322	28.5	**322**	**28.5**	323	28.5	315	29.1	**315**	**29.1**	316	29.1
434.zeusmp	**163**	**55.9**	163	55.9	164	55.6	**163**	**55.9**	163	55.9	164	55.6
435.gromacs	**676**	**10.6**	677	10.6	676	10.6	629	11.3	**631**	**11.3**	633	11.3
436.cactusADM	109	110	109	109	**109**	**109**	109	110	109	109	**109**	**109**
437.leslie3d	**134**	**69.9**	135	69.7	134	70.0	**134**	**69.9**	135	69.7	134	70.0
444.namd	858	9.35	**858**	**9.35**	858	9.35	844	9.51	**843**	**9.52**	843	9.52
447.dealII	573	20.0	**573**	**20.0**	573	20.0	573	20.0	**573**	**20.0**	573	20.0
450.soplex	510	16.4	**510**	**16.4**	510	16.3	510	16.4	**510**	**16.4**	510	16.3
453.povray	**359**	**14.8**	358	14.8	360	14.8	284	18.7	285	18.6	**284**	**18.7**
454.calculix	565	14.6	**563**	**14.7**	562	14.7	506	16.3	505	16.3	**505**	**16.3**
459.GemsFDTD	**232**	**45.8**	199	53.3	234	45.4	199	53.2	179	59.4	**196**	**54.1**
465.tonto	**767**	**12.8**	670	14.7	769	12.8	616	16.0	617	16.0	**617**	**16.0**
470.lbm	81.2	169	81.0	170	**81.0**	**170**	81.2	169	81.0	170	**81.0**	**170**
481.wrf	**394**	**28.4**	392	28.5	395	28.3	**394**	**28.4**	392	28.5	395	28.3
482.sphinx3	858	22.7	**864**	**22.6**	871	22.4	875	22.3	771	25.3	**806**	**24.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodev   /mnt/hugepages   hugetlbfs   defaults   0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
Load Default BIOS Settings and then change the following
  Power C-states enabled
  Demand Scrub disabled
```

General Notes

```
Binaries compiled on RHEL5.5
OMP_NUM_THREADS set to number of cores
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel`

C++ benchmarks:

444.namd: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html
http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml
http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS22 (Intel Xeon E5603)

SPECfp2006 = 31.0

SPECfp_base2006 = 29.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:15:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.