



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp[®]_rate2006 = 69.0

HA8000-bd (Intel Core i3-2120T)

SPECfp_rate_base2006 = 66.9

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

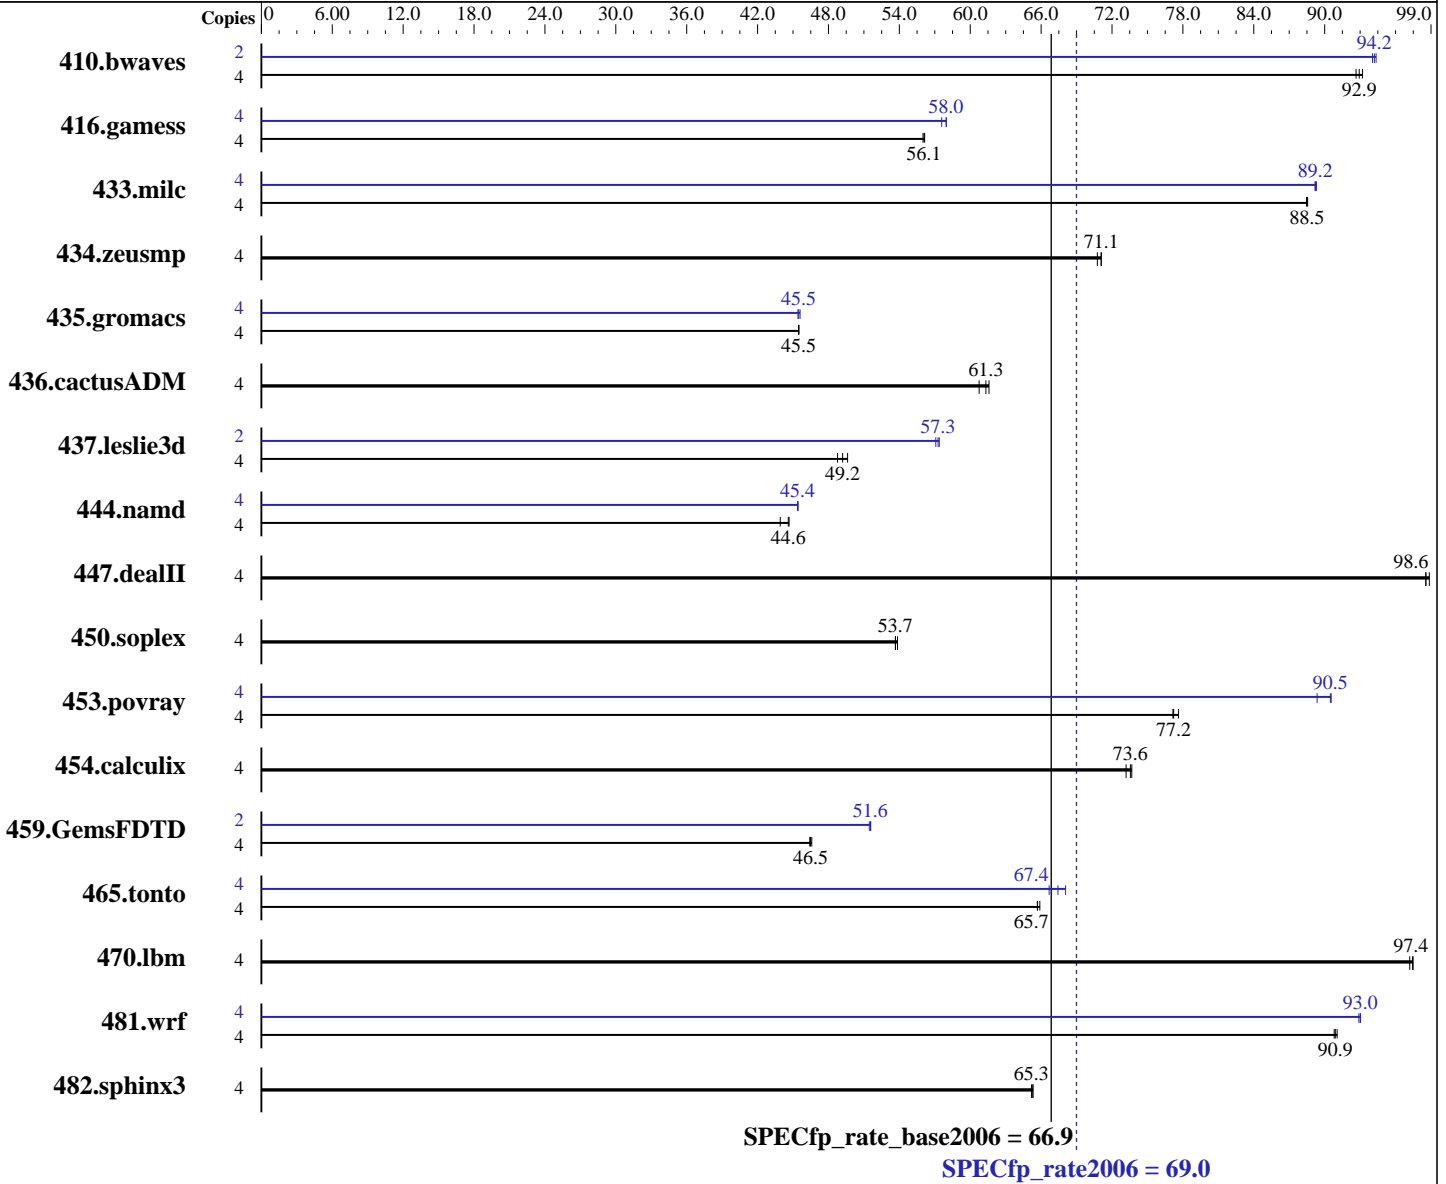

Hardware

CPU Name: Intel Core i3-2120T
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 12.1.0.225 of Intel Compiler XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = **69.0**

HA8000-bd (Intel Core i3-2120T)

SPECfp_rate_base2006 = 66.9

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB
 (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)
 Disk Subsystem: 1 x 250 GB SATA2, 7200 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	583	93.2	587	92.7	585	92.9	2	289	94.1	288	94.4	289	94.2
416.gamess	4	1396	56.1	1395	56.1	1399	56.0	4	1360	57.6	1351	58.0	1351	58.0
433.milc	4	415	88.5	415	88.6	415	88.5	4	412	89.2	411	89.3	412	89.2
434.zeusmp	4	514	70.8	512	71.1	512	71.1	4	514	70.8	512	71.1	512	71.1
435.gromacs	4	628	45.5	628	45.5	628	45.5	4	629	45.4	628	45.5	626	45.6
436.cactusADM	4	776	61.6	787	60.8	779	61.3	4	776	61.6	787	60.8	779	61.3
437.leslie3d	4	758	49.6	771	48.8	764	49.2	2	329	57.1	328	57.4	328	57.3
444.namd	4	718	44.7	730	43.9	719	44.6	4	706	45.4	707	45.4	707	45.4
447.dealII	4	463	98.9	464	98.6	464	98.6	4	463	98.9	464	98.6	464	98.6
450.soplex	4	620	53.8	622	53.7	622	53.7	4	620	53.8	622	53.7	622	53.7
453.povray	4	276	77.2	276	77.2	274	77.6	4	235	90.6	235	90.5	238	89.4
454.calculix	4	449	73.6	451	73.2	448	73.7	4	449	73.6	451	73.2	448	73.7
459.GemsFDTD	4	913	46.5	914	46.4	911	46.6	2	411	51.6	412	51.6	412	51.5
465.tonto	4	597	65.9	599	65.7	599	65.7	4	584	67.4	578	68.1	590	66.7
470.lbm	4	564	97.4	564	97.5	565	97.2	4	564	97.4	564	97.5	565	97.2
481.wrf	4	491	91.1	492	90.9	492	90.8	4	480	93.0	481	92.9	480	93.0
482.sphinx3	4	1194	65.3	1196	65.2	1194	65.3	4	1194	65.3	1196	65.2	1194	65.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 69.0

HA8000-bd (Intel Core i3-2120T)

SPECfp_rate_base2006 = 66.9

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages disabled with:
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 69.0

HA8000-bd (Intel Core i3-2120T)

SPECfp_rate_base2006 = 66.9

CPU2006 license: 35

Test date: Dec-2011

Test sponsor: HITACHI

Hardware Availability: Feb-2012

Tested by: HITACHI

Software Availability: Sep-2011

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 69.0

HA8000-bd (Intel Core i3-2120T)

SPECfp_rate_base2006 = 66.9

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 69.0

HA8000-bd (Intel Core i3-2120T)

SPECfp_rate_base2006 = 66.9

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 02:15:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 March 2012.