



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = **695**

NovaScale R460 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_rate_base2006 = **667**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

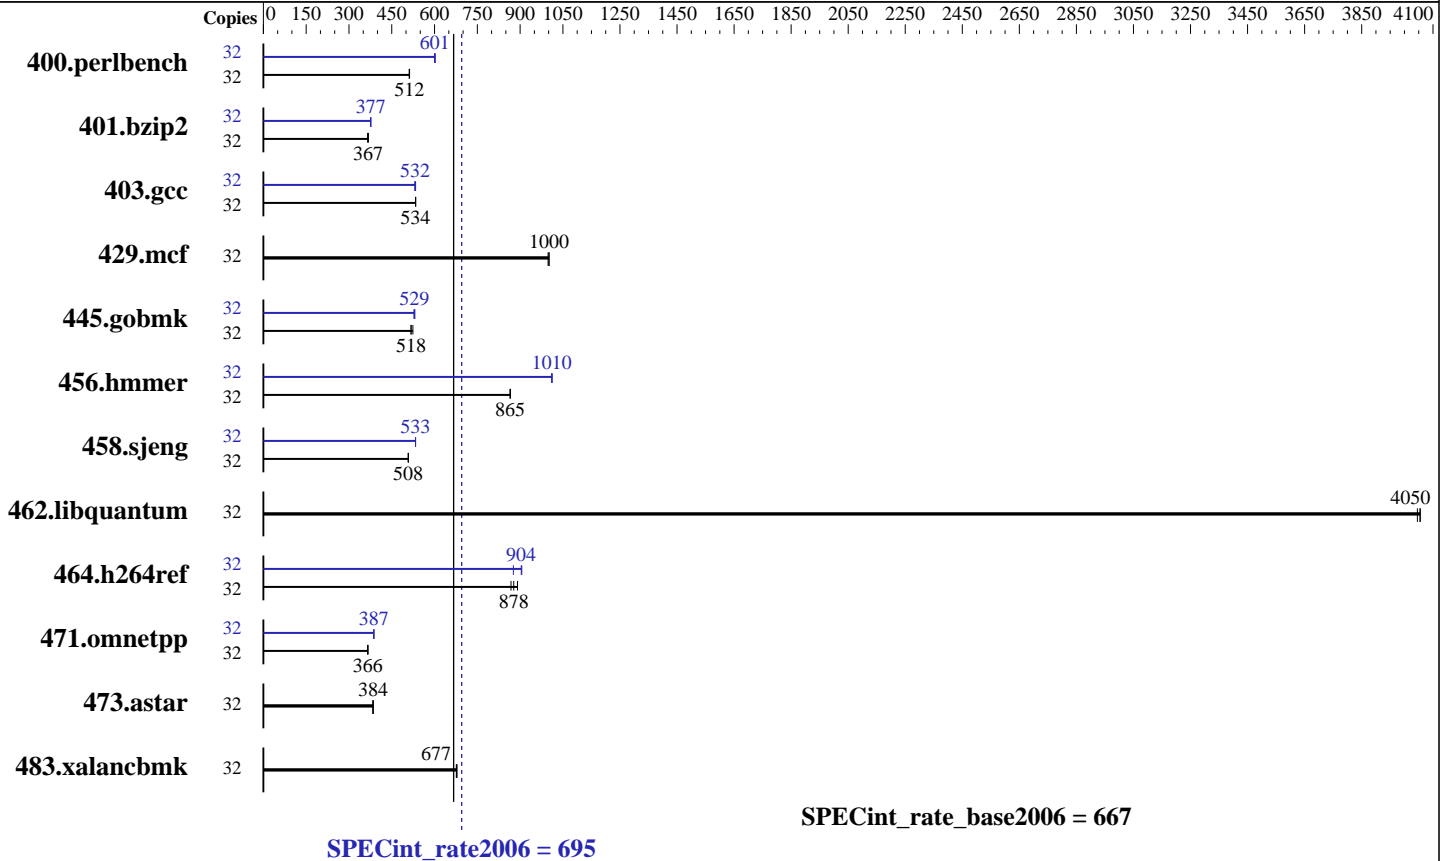

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) 3.0.13-0.9-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = **695**

NovaScale R460 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_rate_base2006 = 667

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Feb-2012
Hardware Availability: Mar-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	611	512	611	511	610	512	32	520	601	521	600	519	602
401.bzip2	32	839	368	841	367	845	365	32	820	377	822	376	820	377
403.gcc	32	483	534	483	534	483	533	32	484	532	483	534	485	531
429.mcf	32	292	998	291	1000	291	1000	32	292	998	291	1000	291	1000
445.gobmk	32	640	524	648	518	649	518	32	634	529	632	531	636	528
456.hammer	32	345	865	345	865	345	866	32	295	1010	295	1010	295	1010
458.sjeng	32	762	508	762	508	762	508	32	726	533	726	533	726	533
462.libquantum	32	164	4050	164	4050	163	4060	32	164	4050	164	4050	163	4060
464.h264ref	32	816	868	795	891	807	878	32	782	906	783	904	808	876
471.omnetpp	32	546	366	546	366	547	366	32	517	387	516	388	517	387
473.astar	32	584	385	584	384	585	384	32	584	385	584	384	585	384
483.xalancbmk	32	326	677	325	679	326	676	32	326	677	325	679	326	676

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Performance in BIOS
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on linux-twrn Fri Feb 10 11:04:47 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 695

NovaScale R460 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_rate_base2006 = 667

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

Platform Notes (Continued)

```

siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

From /proc/meminfo

```

MemTotal:      132122688 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2

```

uname -a:

```

Linux linux-twrn 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012
(54ddfaf) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 10 10:48 last=S

SPEC is set to: /root/cpu2006-1.2

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  131G  6.2G  118G   5% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Dell PowerEdge R720 and

the Bull NovaScale R460 F3 models are electronically equivalent.

The results have been measured on a Dell PowerEdge R720 model



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 695

NovaScale R460 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_rate_base2006 = 667

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Feb-2012
Hardware Availability: Mar-2012
Software Availability: Feb-2012

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 695

NovaScale R460 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_rate_base2006 = 667

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 695

NovaScale R460 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_rate_base2006 = 667

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120313.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:50:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 March 2012.