



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = 662

NovaScale R440 F3 (Intel Xeon E5-2680, 2.70 GHz)

SPECint_rate_base2006 = 635

CPU2006 license: 20


Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

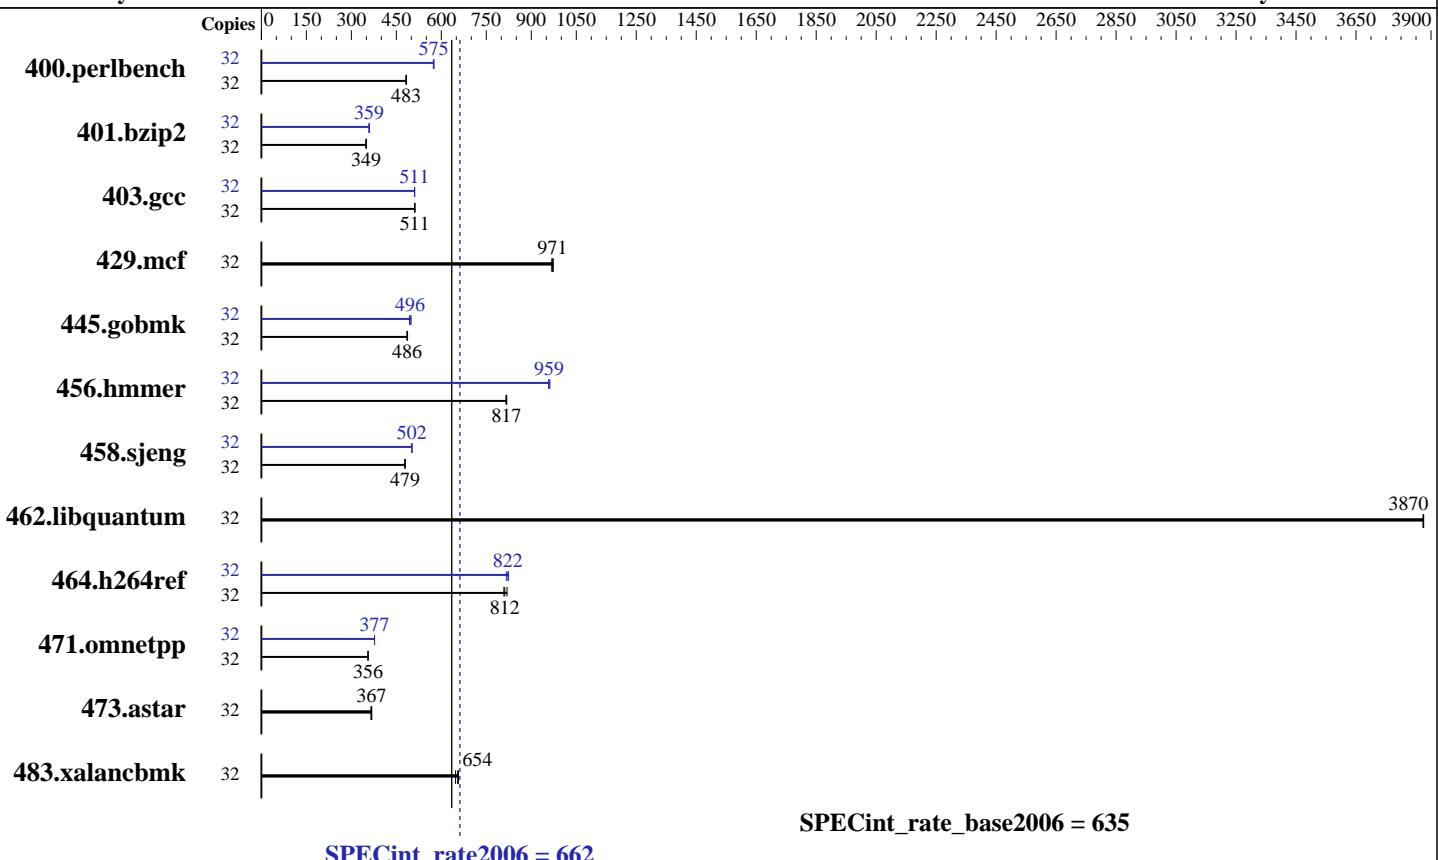

SPECint_rate_base2006 = 635

SPECint_rate2006 = 662

Hardware

CPU Name: Intel Xeon E5-2680
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 2 x 146 GB 15000 RPM SAS, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.9-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 662

NovaScale R440 F3 (Intel Xeon E5-2680, 2.70 GHz)

SPECint_rate_base2006 = 635

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	649	482	647	483	647	483	32	544	575	543	575	545	573
401.bzip2	32	883	350	884	349	887	348	32	860	359	859	359	859	360
403.gcc	32	504	511	504	511	503	512	32	504	511	504	511	505	511
429.mcf	32	301	968	301	971	300	973	32	301	968	301	971	300	973
445.gobmk	32	691	486	689	487	691	485	32	676	496	672	499	680	494
456.hammer	32	365	817	366	815	365	818	32	311	959	310	962	312	958
458.sjeng	32	807	480	810	478	808	479	32	772	501	771	502	772	502
462.libquantum	32	171	3870	171	3880	171	3870	32	171	3870	171	3880	171	3870
464.h264ref	32	876	809	872	812	864	819	32	859	824	867	817	862	822
471.omnetpp	32	562	356	563	356	562	356	32	530	377	530	377	530	377
473.astar	32	610	368	615	365	612	367	32	610	368	615	365	612	367
483.xalancbmk	32	337	654	341	647	336	657	32	337	654	341	647	336	657

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost set to Enabled

C States/C1E set to Enabled

Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on unsvr Thu Feb 9 10:45:33 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2680 0 @ 2.70GHz
  2 "physical id"s (chips)
  32 "processors"
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 F3 (Intel Xeon E5-2680, 2.70 GHz)

SPECint_rate2006 = 662

SPECint_rate_base2006 = 635

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings   : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132089856 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 11 (x86_64)
  VERSION = 11
  PATCHLEVEL = 2
```

```
uname -a:
Linux unsrv 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 9 09:48 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal      ext3  265G   68G  184G  27%  /
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/CPU2006-1.2/lib32:/root/CPU2006-1.2/lib64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
The Dell PowerEdge R620 and
the Bull NovaScale R440 F3 models are electronically equivalent.
The results have been measured on a Dell PowerEdge R620 model
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 F3 (Intel Xeon E5-2680, 2.70 GHz)

SPECint_rate2006 = 662

SPECint_rate_base2006 = 635

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 F3 (Intel Xeon E5-2680, 2.70 GHz)

SPECint_rate2006 = 662

SPECint_rate_base2006 = 635

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 F3 (Intel Xeon E5-2680, 2.70 GHz)

SPECint_rate2006 = 662

SPECint_rate_base2006 = 635

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 02:24:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 March 2012.