



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 375**

PowerEdge T620 (Intel Xeon E5-2640, 2.50 GHz)

**SPECfp\_rate\_base2006 = 366**

CPU2006 license: 55


Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

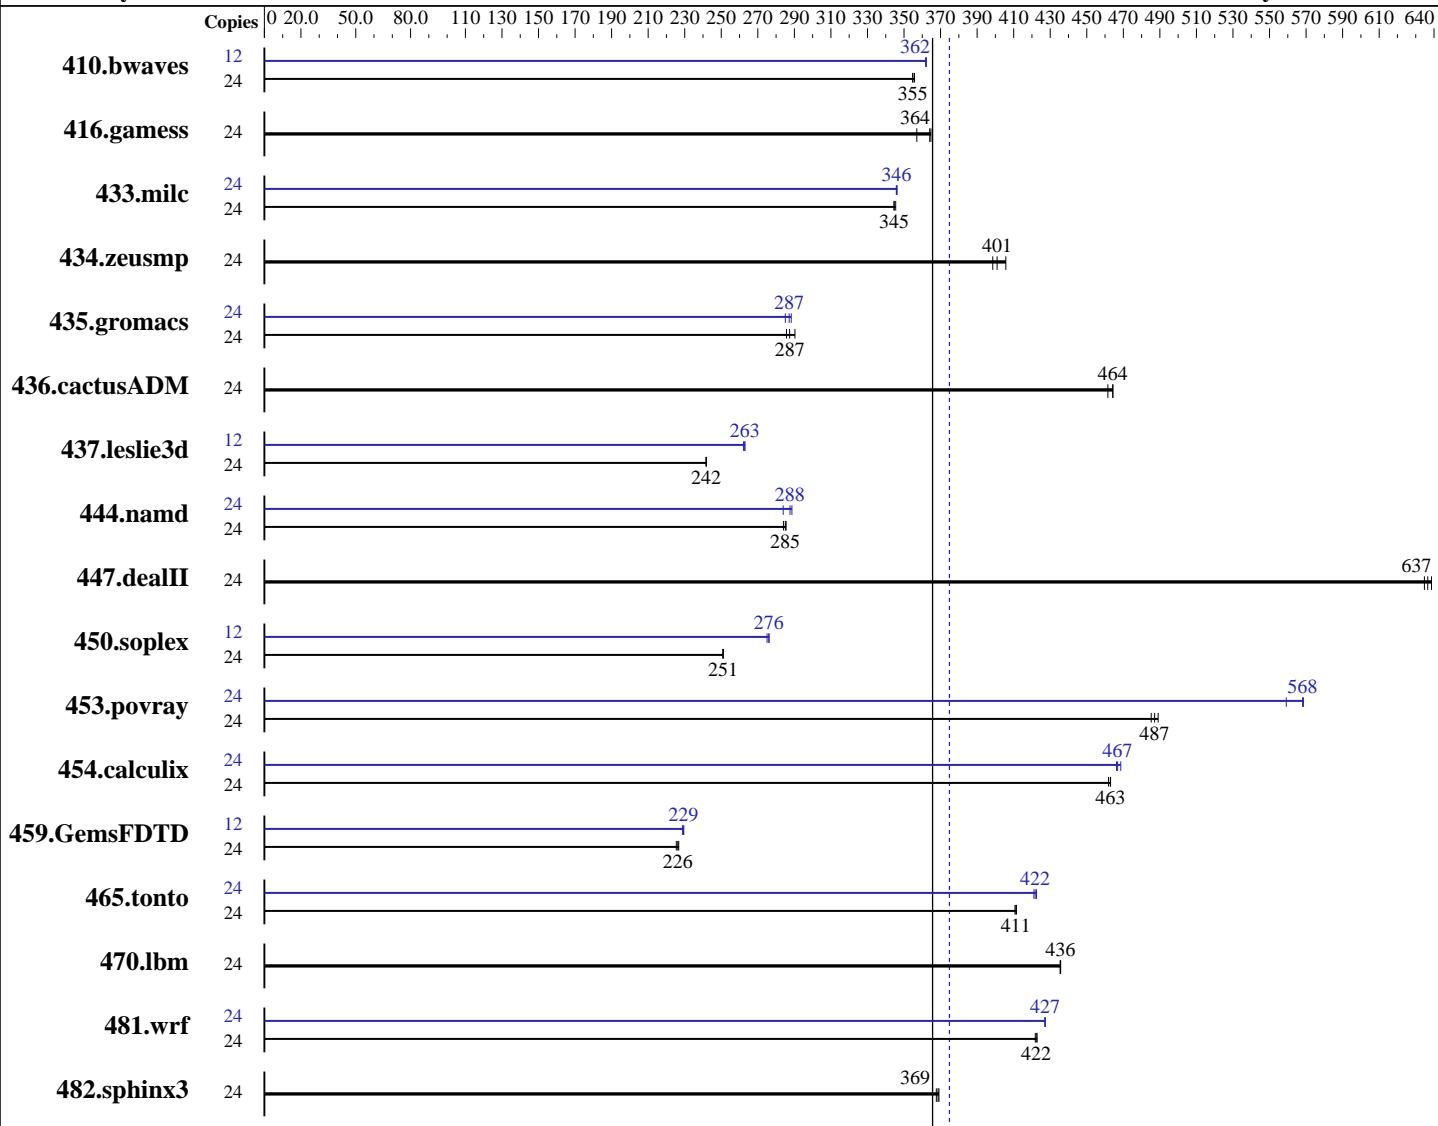

**SPECfp\_rate\_base2006 = 366**

**SPECfp\_rate2006 = 375**

## Hardware

CPU Name: Intel Xeon E5-2640  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64)  
 3.0.13-0.9-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE  
 for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran  
 Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 375**

PowerEdge T620 (Intel Xeon E5-2640, 2.50 GHz)

**SPECfp\_rate\_base2006 = 366**

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem:	1 x 1 TB 7200 RPM SATA
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	917	356	<b>919</b>	<b>355</b>	919	355	12	<b>450</b>	<b>362</b>	451	362	450	362		
416.gamess	24	1288	365	1316	357	<b>1291</b>	<b>364</b>	24	1288	365	1316	357	<b>1291</b>	<b>364</b>		
433.milc	24	639	345	<b>639</b>	<b>345</b>	638	345	24	637	346	636	346	<b>637</b>	<b>346</b>		
434.zeusmp	24	548	399	538	406	<b>545</b>	<b>401</b>	24	548	399	538	406	<b>545</b>	<b>401</b>		
435.gromacs	24	590	290	600	286	<b>596</b>	<b>287</b>	24	<b>597</b>	<b>287</b>	594	288	601	285		
436.cactusADM	24	<b>618</b>	<b>464</b>	618	464	621	462	24	<b>618</b>	<b>464</b>	618	464	621	462		
437.leslie3d	24	<b>933</b>	<b>242</b>	933	242	933	242	12	<b>429</b>	<b>263</b>	429	263	430	262		
444.namd	24	674	285	678	284	<b>675</b>	<b>285</b>	24	667	289	678	284	<b>669</b>	<b>288</b>		
447.dealII	24	430	639	<b>431</b>	<b>637</b>	433	635	24	430	639	<b>431</b>	<b>637</b>	433	635		
450.soplex	24	<b>797</b>	<b>251</b>	797	251	798	251	12	364	275	362	276	<b>363</b>	<b>276</b>		
453.povray	24	263	485	<b>262</b>	<b>487</b>	261	489	24	<b>225</b>	<b>568</b>	228	559	225	569		
454.calculix	24	429	462	428	463	<b>428</b>	<b>463</b>	24	423	469	425	466	<b>424</b>	<b>467</b>		
459.GemsFDTD	24	1123	227	<b>1126</b>	<b>226</b>	1130	225	12	<b>555</b>	<b>229</b>	557	229	555	230		
465.tonto	24	575	411	<b>574</b>	<b>411</b>	574	412	24	561	421	559	422	<b>560</b>	<b>422</b>		
470.lbm	24	757	435	<b>757</b>	<b>436</b>	757	436	24	<b>757</b>	<b>435</b>	<b>757</b>	<b>436</b>	757	436		
481.wrf	24	634	423	636	422	<b>635</b>	<b>422</b>	24	<b>627</b>	<b>427</b>	627	427	628	427		
482.sphinx3	24	1272	368	<b>1269</b>	<b>369</b>	1267	369	24	1272	368	<b>1269</b>	<b>369</b>	1267	369		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 375**

PowerEdge T620 (Intel Xeon E5-2640, 2.50 GHz)

**SPECfp\_rate\_base2006 = 366**

**CPU2006 license:** 55

**Test date:** Feb-2012

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Platform Notes

System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost set to Enabled  
C States/C1E set to Enabled  
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on linux-Sandy Tue Feb 14 20:38:32 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2640 0 @ 2.50GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings   : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132122692 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux linux-Sandy 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012
(54ddfaf) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 14 08:08 last=5
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        ext3  197G   69G  119G  37% /
```

Additional information from dmidecode:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 375**

PowerEdge T620 (Intel Xeon E5-2640, 2.50 GHz)

**SPECfp\_rate\_base2006 = 366**

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
The Dell PowerEdge T620 and

the Bull NovaScale T840 F3 models are electronically equivalent.

The results have been measured on a Dell PowerEdge T620 model

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
        465.tonto: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T620 (Intel Xeon E5-2640, 2.50 GHz)

**SPECfp\_rate2006 = 375**

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 375**

PowerEdge T620 (Intel Xeon E5-2640, 2.50 GHz)

**SPECfp\_rate\_base2006 = 366**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
           -opt-mem-layout-trans=3

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static

```

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 375**

PowerEdge T620 (Intel Xeon E5-2640, 2.50 GHz)

**SPECfp\_rate\_base2006 = 366**

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 02:40:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 March 2012.