



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen8
(2.90 GHz, Intel Xeon E5-2667)

SPECint_rate2006 = 528

SPECint_rate_base2006 = 506

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Mar-2012

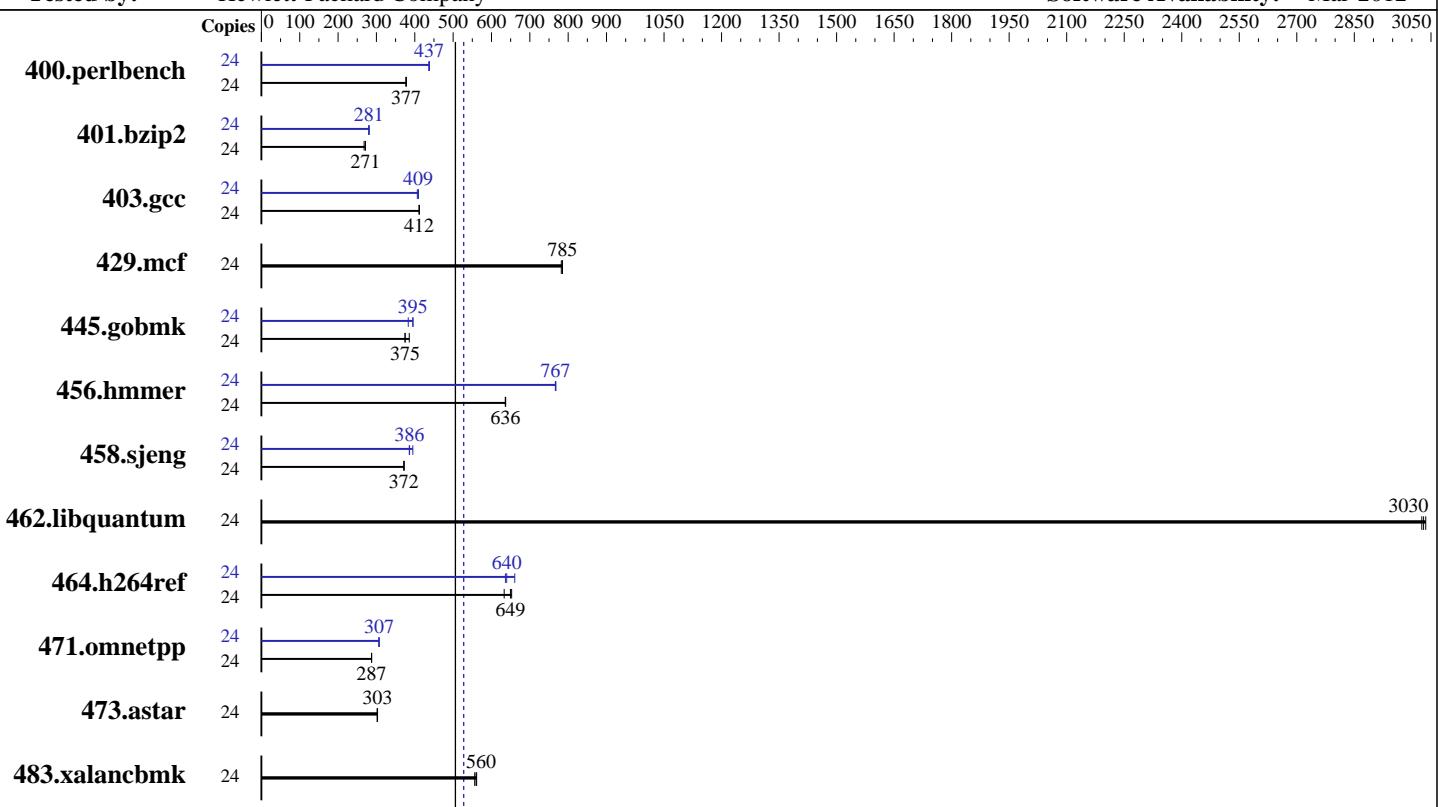

SPECint_rate_base2006 = 506

SPECint_rate2006 = 528

Hardware

CPU Name: Intel Xeon E5-2667
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz: 2900
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 146 GB 15 K SAS
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V9.01, HP Array Configuration Utility, CLI version



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen8
(2.90 GHz, Intel Xeon E5-2667)

SPECint_rate2006 = 528

SPECint_rate_base2006 = 506

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	621	377	622	377	620	378	24	537	437	536	437	535	438
401.bzip2	24	854	271	865	268	854	271	24	824	281	825	281	827	280
403.gcc	24	469	412	469	412	470	411	24	475	407	473	409	472	410
429.mcf	24	279	785	280	782	279	785	24	279	785	280	782	279	785
445.gobmk	24	672	375	653	386	672	375	24	637	395	637	395	657	383
456.hammer	24	352	636	352	636	351	637	24	292	767	292	767	292	768
458.sjeng	24	781	372	781	372	781	372	24	735	395	751	386	753	386
462.libquantum	24	164	3040	164	3030	164	3030	24	164	3040	164	3030	164	3030
464.h264ref	24	839	633	814	653	818	649	24	835	636	830	640	804	661
471.omnetpp	24	522	287	522	287	522	287	24	489	307	490	306	489	307
473.astar	24	558	302	556	303	556	303	24	558	302	556	303	556	303
483.xalancbmk	24	296	560	295	561	298	556	24	296	560	295	561	298	556

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Drive Write Cache set to Enabled in HP Array Configuration Utility, CLI version
Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write in HP Array Configuration Utility, CLI version

Platform Notes

BIOS configuration:

HP Power Profile set to Custom

Energy/Performance Bias is set to Maximum Performance

Thermal Configuration set to Maximum Cooling

Collaborative Power Control set to Disabled

Processor Power and Utilization Monitoring set to Disabled



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen8
(2.90 GHz, Intel Xeon E5-2667)

SPECint_rate2006 = 528

SPECint_rate_base2006 = 506

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/cpu2006/libss2/32:/cpu2006/libss2/64"

Binaries compiled on a system with 2x Xeon E5-2667 CPU + 256GB
memory using SLES11SP2RC3

Base Compiler Invocation

C benchmarks:

 icc -m32

C++ benchmarks:

 icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
 -Wl,-z,muldefs -L/spec/libss2/32 -lsmartheap

Base Other Flags

C benchmarks:

 403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

 icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen8
(2.90 GHz, Intel Xeon E5-2667)

SPECint_rate2006 = 528

SPECint_rate_base2006 = 506

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Mar-2012

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-unroll14 -auto-ilp32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen8
(2.90 GHz, Intel Xeon E5-2667)

SPECint_rate2006 = 528

SPECint_rate_base2006 = 506

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Mar-2012

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/spec/libss2/32 -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 04:08:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 April 2012.