



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = 709

NovaScale R470 F3 (Intel Xeon E5-4607, 2.20 GHz)

SPECint_rate_base2006 = 681

CPU2006 license: 20


Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

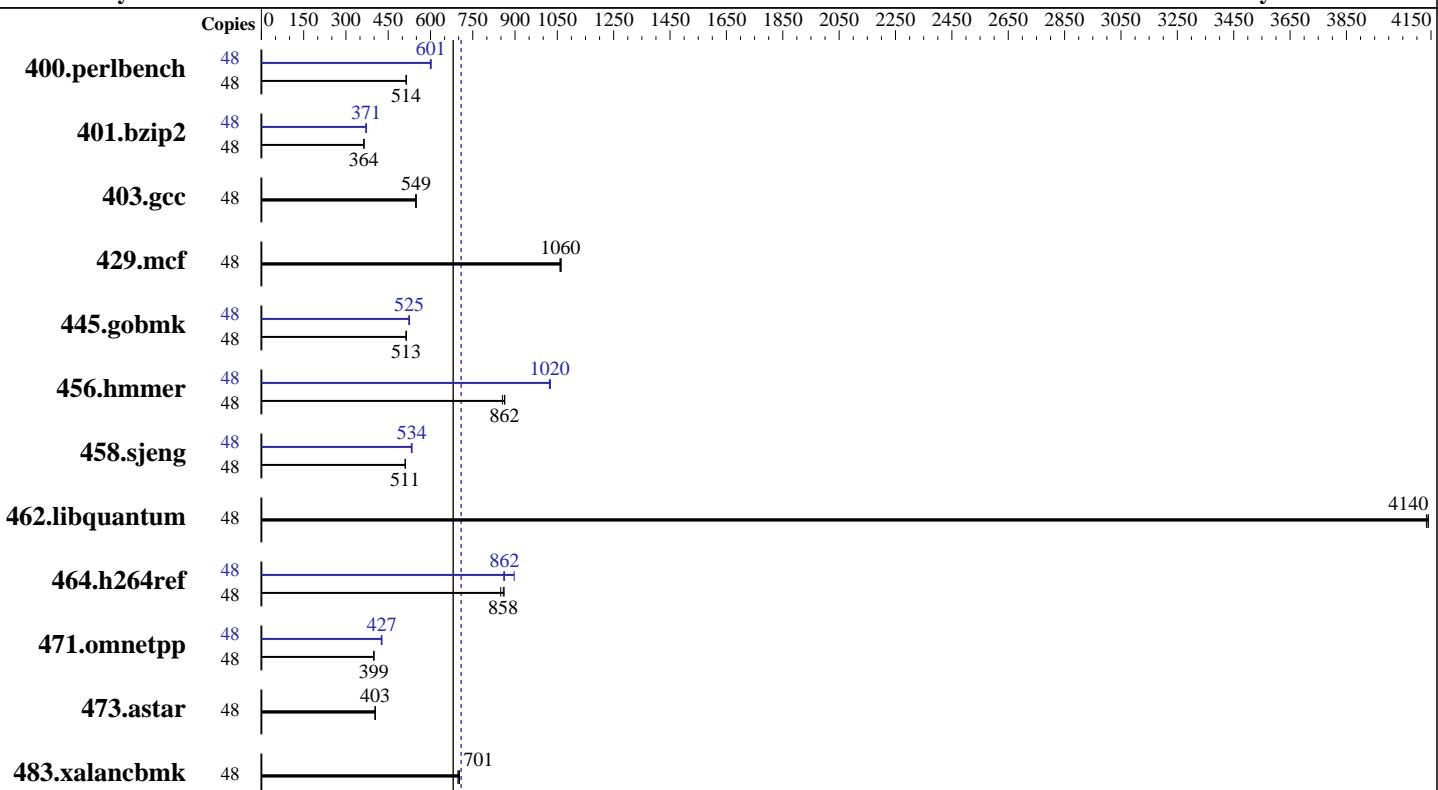

SPECint_rate_base2006 = 681

SPECint_rate2006 = 709

Hardware

CPU Name:	Intel Xeon E5-4607
CPU Characteristics:	
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)
Disk Subsystem:	4 x 300 GB 10000 RPM SAS, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.27-default
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 709

NovaScale R470 F3 (Intel Xeon E5-4607, 2.20 GHz)

SPECint_rate_base2006 = 681

CPU2006 license: 20

Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	913	514	912	514	912	514	48	780	601	782	600	778	602
401.bzip2	48	1273	364	1271	364	1275	363	48	1243	373	1248	371	1248	371
403.gcc	48	704	549	703	549	706	547	48	704	549	703	549	706	547
429.mcf	48	413	1060	412	1060	412	1060	48	413	1060	412	1060	412	1060
445.gobmk	48	978	515	981	513	981	513	48	960	525	962	523	958	525
456.hammer	48	518	864	524	855	519	862	48	437	1020	437	1030	438	1020
458.sjeng	48	1137	511	1138	511	1138	511	48	1088	534	1091	532	1088	534
462.libquantum	48	240	4140	241	4130	240	4140	48	240	4140	241	4130	240	4140
464.h264ref	48	1251	849	1233	861	1238	858	48	1184	897	1235	860	1232	862
471.omnetpp	48	752	399	751	399	752	399	48	705	425	702	427	702	427
473.astar	48	835	403	835	403	832	405	48	835	403	835	403	832	405
483.xalancbmk	48	473	701	471	703	475	697	48	473	701	471	703	475	697

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

C States/C1E set to Enabled

Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on icon4p Thu Mar 22 17:38:11 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-4607 0 @ 2.20GHz

4 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 709

NovaScale R470 F3 (Intel Xeon E5-4607, 2.20 GHz)

SPECint_rate_base2006 = 681

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Platform Notes (Continued)

```
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings   : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
physical 2: cores 0 1 2 3 4 5
physical 3: cores 0 1 2 3 4 5
cache size : 12288 KB

From /proc/meminfo
MemTotal:      264501512 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2

uname -a:
Linux icon4p 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 22 17:32 last=S

SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2       ext3  1.1T  123G  917G  12%  /


Additional information from dmidecode:
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R470 F3 (Intel Xeon E5-4607, 2.20 GHz)

SPECint_rate2006 = 709

CPU2006 license: 20

Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

General Notes (Continued)

the Dell PowerEdge R820 and

the Bull NovaScale R470 F3 Models are electronically equivalent.

the results have been measured on a Dell PowerEdge R820 model.

Base Compiler Invocation

C benchmarks:

 icc -m32

C++ benchmarks:

 icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

 -Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:

 403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

 icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R470 F3 (Intel Xeon E5-4607, 2.20 GHz)

SPECint_rate2006 = 709

SPECint_rate_base2006 = 681

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R470 F3 (Intel Xeon E5-4607, 2.20 GHz)

SPECint_rate2006 = 709

SPECint_rate_base2006 = 681

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/smarterheap -lsmarterheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 06:01:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.