



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

### SPECint<sup>®</sup>\_rate2006 = 1230

### Huawei RH2485 V2 (Intel Xeon E5-4650)

### SPECint\_rate\_base2006 = 1180

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

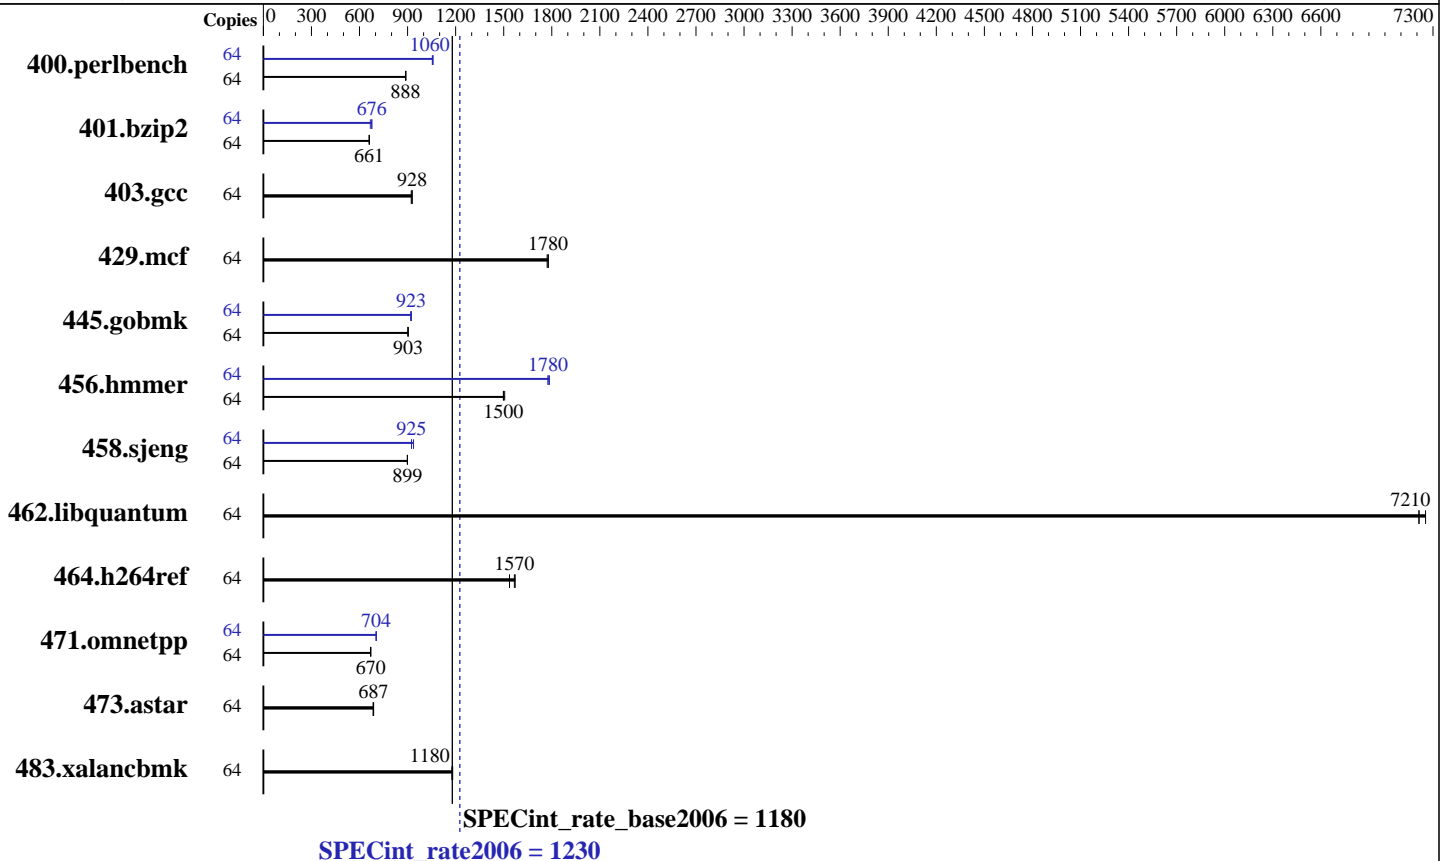

#### Hardware

CPU Name: Intel Xeon E5-4650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

#### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint\_rate2006 = 1230

Huawei RH2485 V2 (Intel Xeon E5-4650)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	<b>704</b>	<b>888</b>	703	890	705	887	64	<b>591</b>	<b>1060</b>	593	1050	591	1060
401.bzip2	64	933	662	<b>935</b>	<b>661</b>	935	660	64	912	677	<b>913</b>	<b>676</b>	925	667
403.gcc	64	555	929	558	923	<b>555</b>	<b>928</b>	64	555	929	558	923	<b>555</b>	<b>928</b>
429.mcf	64	330	1770	328	1780	<b>328</b>	<b>1780</b>	64	330	1770	328	1780	<b>328</b>	<b>1780</b>
445.gobmk	64	743	904	744	902	<b>744</b>	<b>903</b>	64	<b>727</b>	<b>923</b>	727	924	730	919
456.hammer	64	399	1500	<b>398</b>	<b>1500</b>	396	1510	64	334	1790	<b>336</b>	<b>1780</b>	336	1780
458.sjeng	64	862	898	861	899	<b>861</b>	<b>899</b>	64	838	924	826	937	<b>837</b>	<b>925</b>
462.libquantum	64	183	7250	184	7210	<b>184</b>	<b>7210</b>	64	183	7250	184	7210	<b>184</b>	<b>7210</b>
464.h264ref	64	901	1570	<b>904</b>	<b>1570</b>	922	1540	64	901	1570	<b>904</b>	<b>1570</b>	922	1540
471.omnetpp	64	597	670	598	669	<b>597</b>	<b>670</b>	64	568	704	<b>568</b>	<b>704</b>	568	705
473.astar	64	<b>654</b>	<b>687</b>	656	685	653	688	64	<b>654</b>	<b>687</b>	656	685	653	688
483.xalancbmk	64	375	1180	<b>374</b>	<b>1180</b>	374	1180	64	375	1180	<b>374</b>	<b>1180</b>	374	1180

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on RH62-yjp2 Thu Jun 21 03:36:59 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1230

Huawei RH2485 V2 (Intel Xeon E5-4650)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4650 0 @ 2.70GHz
 4 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
  physical 2: cores 0 1 2 3 4 5 6 7
  physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      264495772 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux RH62-yjp2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jun 21 03:28

```

SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext3     270G   23G  233G   9% /

```

Additional information from dmidecode:

```

Memory:
32x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank

```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory  
using RHEL 6.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1230

Huawei RH2485 V2 (Intel Xeon E5-4650)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jun-2012  
Hardware Availability: May-2012  
Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64  
  
456.hmmer: icc -m64  
  
458.sjeng: icc -m64  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1230

Huawei RH2485 V2 (Intel Xeon E5-4650)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1230

Huawei RH2485 V2 (Intel Xeon E5-4650)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 10:01:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 July 2012.