




SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520H (Intel Xeon E5-2609)

SPECint®2006 = 36.0

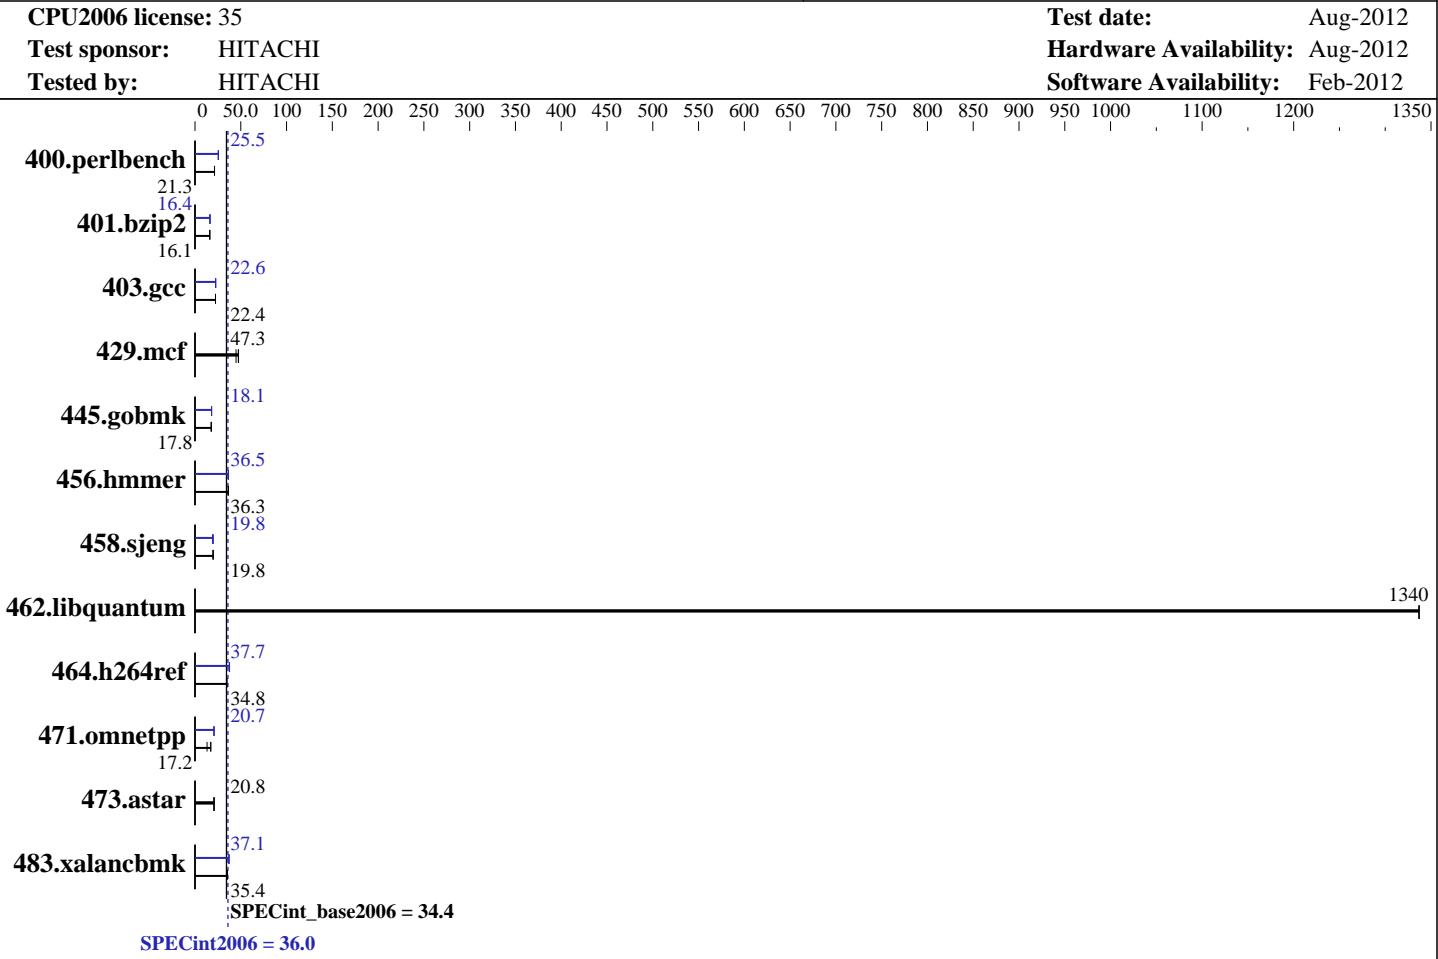

Hardware

CPU Name:	Intel Xeon E5-2609
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3L-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem:	1 x 146 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.4.2.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520H (Intel Xeon E5-2609)

SPECint2006 = 36.0

SPECint_base2006 = 34.4

CPU2006 license: 35

Test date: Aug-2012

Test sponsor: HITACHI

Hardware Availability: Aug-2012

Tested by: HITACHI

Software Availability: Feb-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	459	21.3	458	21.3	458	21.3	383	25.5	383	25.5	384	25.5
401.bzip2	599	16.1	599	16.1	600	16.1	590	16.4	590	16.4	589	16.4
403.gcc	360	22.4	360	22.4	359	22.4	357	22.6	357	22.6	357	22.6
429.mcf	193	47.3	192	47.6	203	44.8	193	47.3	192	47.6	203	44.8
445.gobmk	591	17.8	590	17.8	590	17.8	579	18.1	579	18.1	579	18.1
456.hmmer	257	36.3	257	36.3	257	36.3	255	36.5	256	36.5	256	36.5
458.sjeng	611	19.8	611	19.8	611	19.8	610	19.8	611	19.8	632	19.1
462.libquantum	15.5	1340	15.5	1340	15.5	1340	15.5	1340	15.5	1340	15.5	1340
464.h264ref	642	34.5	636	34.8	636	34.8	587	37.7	587	37.7	592	37.4
471.omnetpp	363	17.2	363	17.2	475	13.2	301	20.8	301	20.7	302	20.7
473.astar	338	20.8	335	20.9	339	20.7	338	20.8	335	20.9	339	20.7
483.xalancbmk	195	35.4	195	35.4	198	34.8	186	37.1	186	37.1	186	37.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date::: 2011-10-11 #$
running on localhost.localdomain Fri Aug 3 18:16:40 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 0 @ 2.40GHz
        2 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 4
        siblings : 4
        physical 0: cores 0 1 2 3
        physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      132140028 kB
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520H (Intel Xeon E5-2609)

SPECint2006 = 36.0

SPECint_base2006 = 34.4

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Aug-2012

Hardware Availability: Aug-2012

Software Availability: Feb-2012

Platform Notes (Continued)

```
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-220.4.2.el6.x86_64 #1 SMP Mon Feb 6
16:39:28 EST 2012 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 3 18:10

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

HITACHI BladeSymphony BS520H and HITACHI Compute Blade 520H are electronically equivalent. The results have been measured on a HITACHI BladeSymphony BS520H.

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520H (Intel Xeon E5-2609)

SPECint2006 = 36.0

SPECint_base2006 = 34.4

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Aug-2012

Hardware Availability: Aug-2012

Software Availability: Feb-2012

Base Portability Flags (Continued)

```
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
445.gobmk: icc -m32
```

```
464.h264ref: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m32
```

```
473.astar: icpc -m64
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520H (Intel Xeon E5-2609)

SPECint2006 = 36.0

SPECint_base2006 = 34.4

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Aug-2012

Hardware Availability: Aug-2012

Software Availability: Feb-2012

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
   403.gcc: -DSPEC_CPU_LP64
   429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
   473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
               -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
               -ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
               -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
               -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-ra-region-strategy=block           -ansi-alias
               -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520H (Intel Xeon E5-2609)

SPECint2006 = 36.0

SPECint_base2006 = 34.4

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Aug-2012

Hardware Availability: Aug-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 13:06:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 November 2012.