



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Itautec

### SPECint<sup>®</sup>\_rate2006 = 115

### Servidor Itautec MX215 (Intel Xeon E5-2609)

### SPECint\_rate\_base2006 = 110

CPU2006 license: 9001


Test date: Dec-2012

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Jun-2012

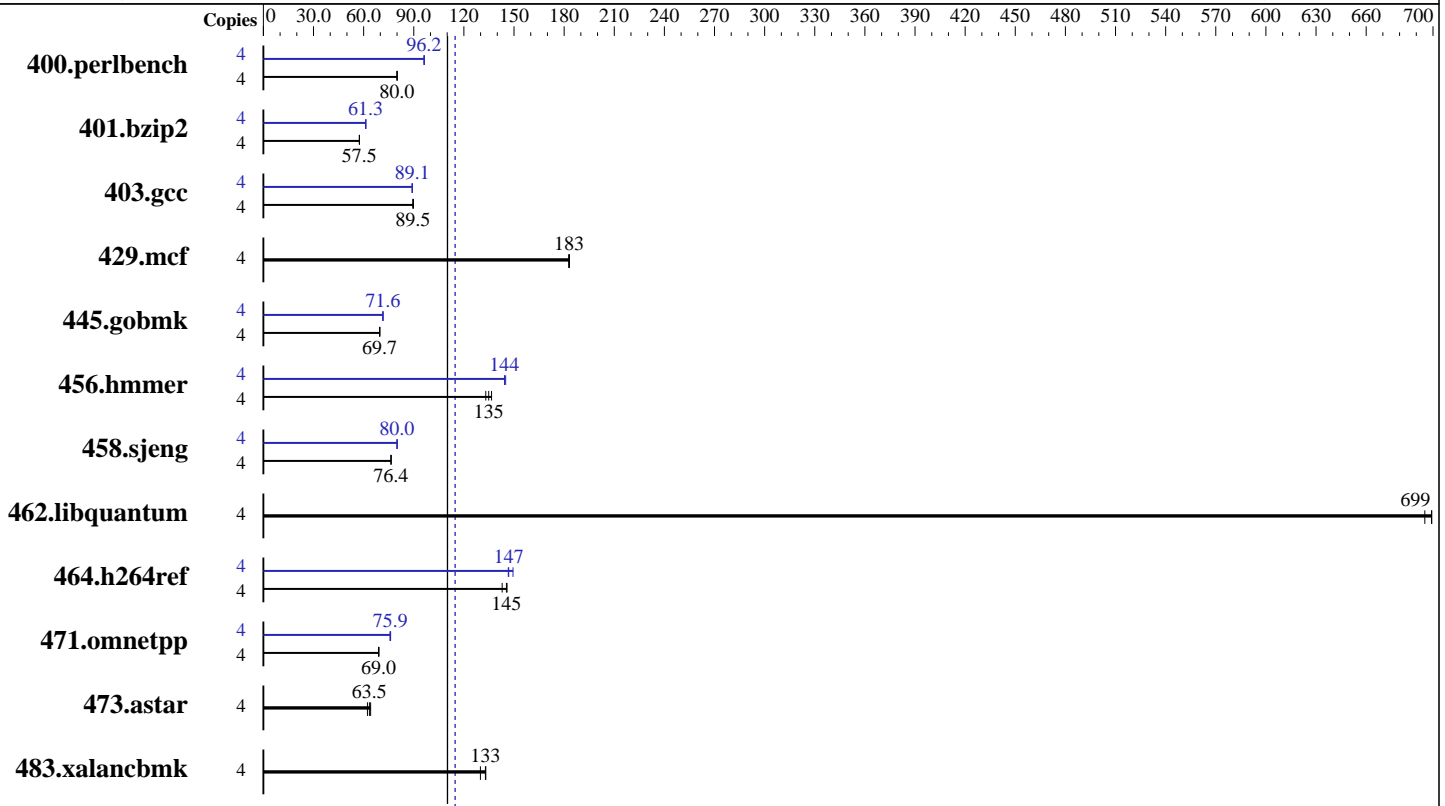

SPECint\_rate\_base2006 = 110

### Hardware

CPU Name: Intel Xeon E5-2609  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx8 PC3-10600R-9, ECC, running at 1066 MHz and CL7)  
 Disk Subsystem: 1 TB, SATA-2, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.3, 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 115

Servidor Itaotec MX215 (Intel Xeon E5-2609)

SPECint\_rate\_base2006 = 110

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2012  
Hardware Availability: Jun-2012  
Software Availability: Jun-2012

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	489	80.0	<b>488</b>	<b>80.0</b>	488	80.1	4	406	96.2	406	96.3	<b>406</b>	<b>96.2</b>
401.bzip2	4	671	57.5	<b>671</b>	<b>57.5</b>	672	57.4	4	630	61.3	630	61.3	<b>630</b>	<b>61.3</b>
403.gcc	4	359	89.8	360	89.5	<b>360</b>	<b>89.5</b>	4	362	89.0	<b>361</b>	<b>89.1</b>	361	89.1
429.mcf	4	199	183	<b>199</b>	<b>183</b>	200	183	4	199	183	<b>199</b>	<b>183</b>	200	183
445.gobmk	4	603	69.6	<b>602</b>	<b>69.7</b>	602	69.7	4	<b>586</b>	<b>71.6</b>	587	71.5	586	71.6
456.hammer	4	<b>277</b>	<b>135</b>	280	133	273	137	4	257	145	259	144	<b>258</b>	<b>144</b>
458.sjeng	4	<b>633</b>	<b>76.4</b>	634	76.4	633	76.4	4	<b>605</b>	<b>80.0</b>	605	80.0	604	80.1
462.libquantum	4	119	699	<b>119</b>	<b>699</b>	119	695	4	119	699	<b>119</b>	<b>699</b>	119	695
464.h264ref	4	607	146	<b>609</b>	<b>145</b>	619	143	4	604	147	592	149	<b>603</b>	<b>147</b>
471.omnetpp	4	<b>363</b>	<b>69.0</b>	361	69.2	363	68.9	4	328	76.2	<b>329</b>	<b>75.9</b>	330	75.8
473.astar	4	451	62.3	437	64.2	<b>443</b>	<b>63.5</b>	4	451	62.3	437	64.2	<b>443</b>	<b>63.5</b>
483.xalancbmk	4	212	130	207	133	<b>208</b>	<b>133</b>	4	212	130	207	133	<b>208</b>	<b>133</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c  
running on mx225sp Thu Dec 1 01:51:25 2011

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2609 0 @ 2.40GHz  
1 "physical id"s (chips)  
4 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 4  
siblings : 4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 115

Servidor Itautec MX215 (Intel Xeon E5-2609)

SPECint\_rate\_base2006 = 110

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2012  
Hardware Availability: Jun-2012  
Software Availability: Jun-2012

## Platform Notes (Continued)

physical 0: cores 0 1 2 3  
cache size : 10240 KB

From /proc/meminfo  
MemTotal: 65882036 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/\*release\* /etc/\*version\*  
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:  
Linux mx225sp 2.6.32-279.el6.x86\_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Nov 30 16:22

SPEC is set to: /home/rcaneca/cpu2006  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/vg\_mx225sp-lv\_home  
ext4 836G 2.1G 791G 1% /home

(End of data from sysinfo program)

## General Notes

This result was measured on the Servidor Itautec MX225.  
The Servidor Itautec MX225 and the Servidor Itautec MX215  
are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 115

Servidor Itaotec MX215 (Intel Xeon E5-2609)

SPECint\_rate\_base2006 = 110

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2012  
Hardware Availability: Jun-2012  
Software Availability: Jun-2012

## Base Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmer: icc -m64  
458.sjeng: icc -m64  
C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 115

Servidor Itaotec MX215 (Intel Xeon E5-2609)

SPECint\_rate\_base2006 = 110

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2012  
Hardware Availability: Jun-2012  
Software Availability: Jun-2012

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 115

Servidor Itautec MX215 (Intel Xeon E5-2609)

SPECint\_rate\_base2006 = 110

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2012  
Hardware Availability: Jun-2012  
Software Availability: Jun-2012

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.html](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.xml](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:57:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 December 2012.