



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, Opteron 6308)
AMD Opteron 6308

SPECfp[®]_rate2006 = 186

SPECfp_rate_base2006 = 171

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

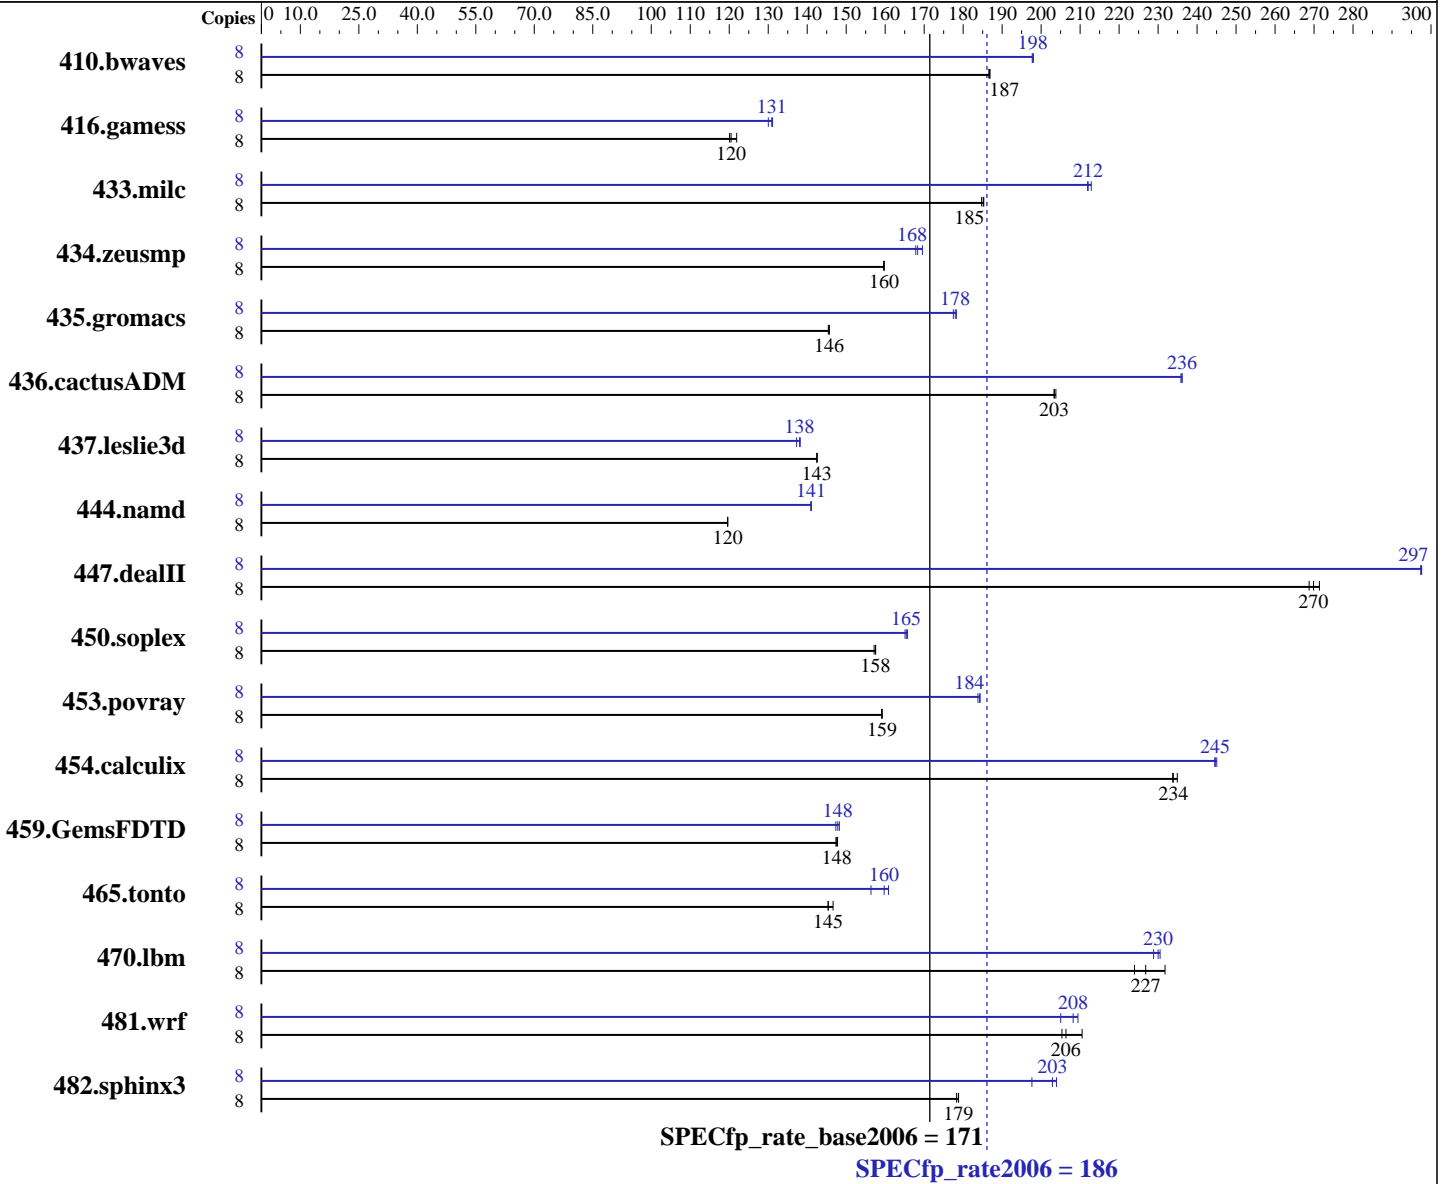

Hardware

CPU Name: AMD Opteron 6308
 CPU Characteristics:
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, Opteron 6308)
AMD Opteron 6308

SPECfp_rate2006 = 186

SPECfp_rate_base2006 = 171

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Primary Cache: 128 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 2 cores
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	583	187	<u>582</u>	<u>187</u>	582	187	8	550	198	<u>549</u>	<u>198</u>	549	198
416.gamess	8	1304	120	<u>1300</u>	<u>120</u>	1285	122	8	1205	130	1195	131	<u>1197</u>	<u>131</u>
433.milc	8	398	185	<u>397</u>	<u>185</u>	396	185	8	347	212	345	213	<u>346</u>	<u>212</u>
434.zeusmp	8	456	160	<u>456</u>	<u>160</u>	456	160	8	429	170	<u>432</u>	<u>168</u>	434	168
435.gromacs	8	<u>392</u>	<u>146</u>	393	145	392	146	8	320	178	322	177	<u>321</u>	<u>178</u>
436.cactusADM	8	469	204	<u>470</u>	<u>203</u>	470	203	8	<u>405</u>	<u>236</u>	405	236	405	236
437.leslie3d	8	<u>528</u>	<u>143</u>	528	143	528	142	8	548	137	544	138	<u>545</u>	<u>138</u>
444.namd	8	537	120	<u>536</u>	<u>120</u>	536	120	8	455	141	455	141	<u>455</u>	<u>141</u>
447.dealII	8	337	271	341	269	<u>339</u>	<u>270</u>	8	308	298	<u>308</u>	<u>297</u>	308	297
450.soplex	8	425	157	423	158	<u>424</u>	<u>158</u>	8	404	165	403	166	<u>403</u>	<u>165</u>
453.povray	8	267	159	267	159	<u>267</u>	<u>159</u>	8	<u>231</u>	<u>184</u>	231	184	232	184
454.calculix	8	<u>282</u>	<u>234</u>	282	234	281	235	8	<u>270</u>	<u>245</u>	270	245	269	245
459.GemsFDTD	8	<u>575</u>	<u>148</u>	574	148	576	147	8	<u>574</u>	<u>148</u>	576	147	573	148
465.tonto	8	542	145	<u>541</u>	<u>145</u>	537	147	8	489	161	<u>493</u>	<u>160</u>	503	156
470.lbm	8	491	224	<u>485</u>	<u>227</u>	474	232	8	480	229	<u>478</u>	<u>230</u>	477	231
481.wrf	8	424	211	435	205	<u>433</u>	<u>206</u>	8	436	205	<u>429</u>	<u>208</u>	427	209
482.sphinx3	8	<u>872</u>	<u>179</u>	872	179	874	178	8	789	198	<u>768</u>	<u>203</u>	765	204

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, Opteron 6308)
AMD Opteron 6308

SPECfp_rate2006 = 186

SPECfp_rate_base2006 = 171

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Operating System Notes (Continued)

```
Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, Opteron 6308)
AMD Opteron 6308

SPECfp_rate2006 = 186

SPECfp_rate_base2006 = 171

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off
-LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, Opteron 6308)
AMD Opteron 6308

SPECfp_rate2006 = 186

SPECfp_rate_base2006 = 171

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Portability Flags (Continued)

435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
 -fno-second-underscore

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
 -IPA:plimit=7000 -IPA:callee_limit=1200
 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
 -march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
 -IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
 -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
 -CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
 -OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealIII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
 -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
 -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
 -march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
 -LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
 -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, Opteron 6308)
AMD Opteron 6308

SPECfp_rate2006 = 186

SPECfp_rate_base2006 = 171

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bd=2m:heap=2m -CG:cmp_peep=on -march=bdver1

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m
-march=bdver1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, Opteron 6308)
AMD Opteron 6308

SPECfp_rate2006 = 186

SPECfp_rate_base2006 = 171

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
        -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:18:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 January 2013.