



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)  
AMD Opteron 6386 SE

### SPECfp<sup>®</sup>\_rate2006 = 886

### SPECfp\_rate\_base2006 = 790

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

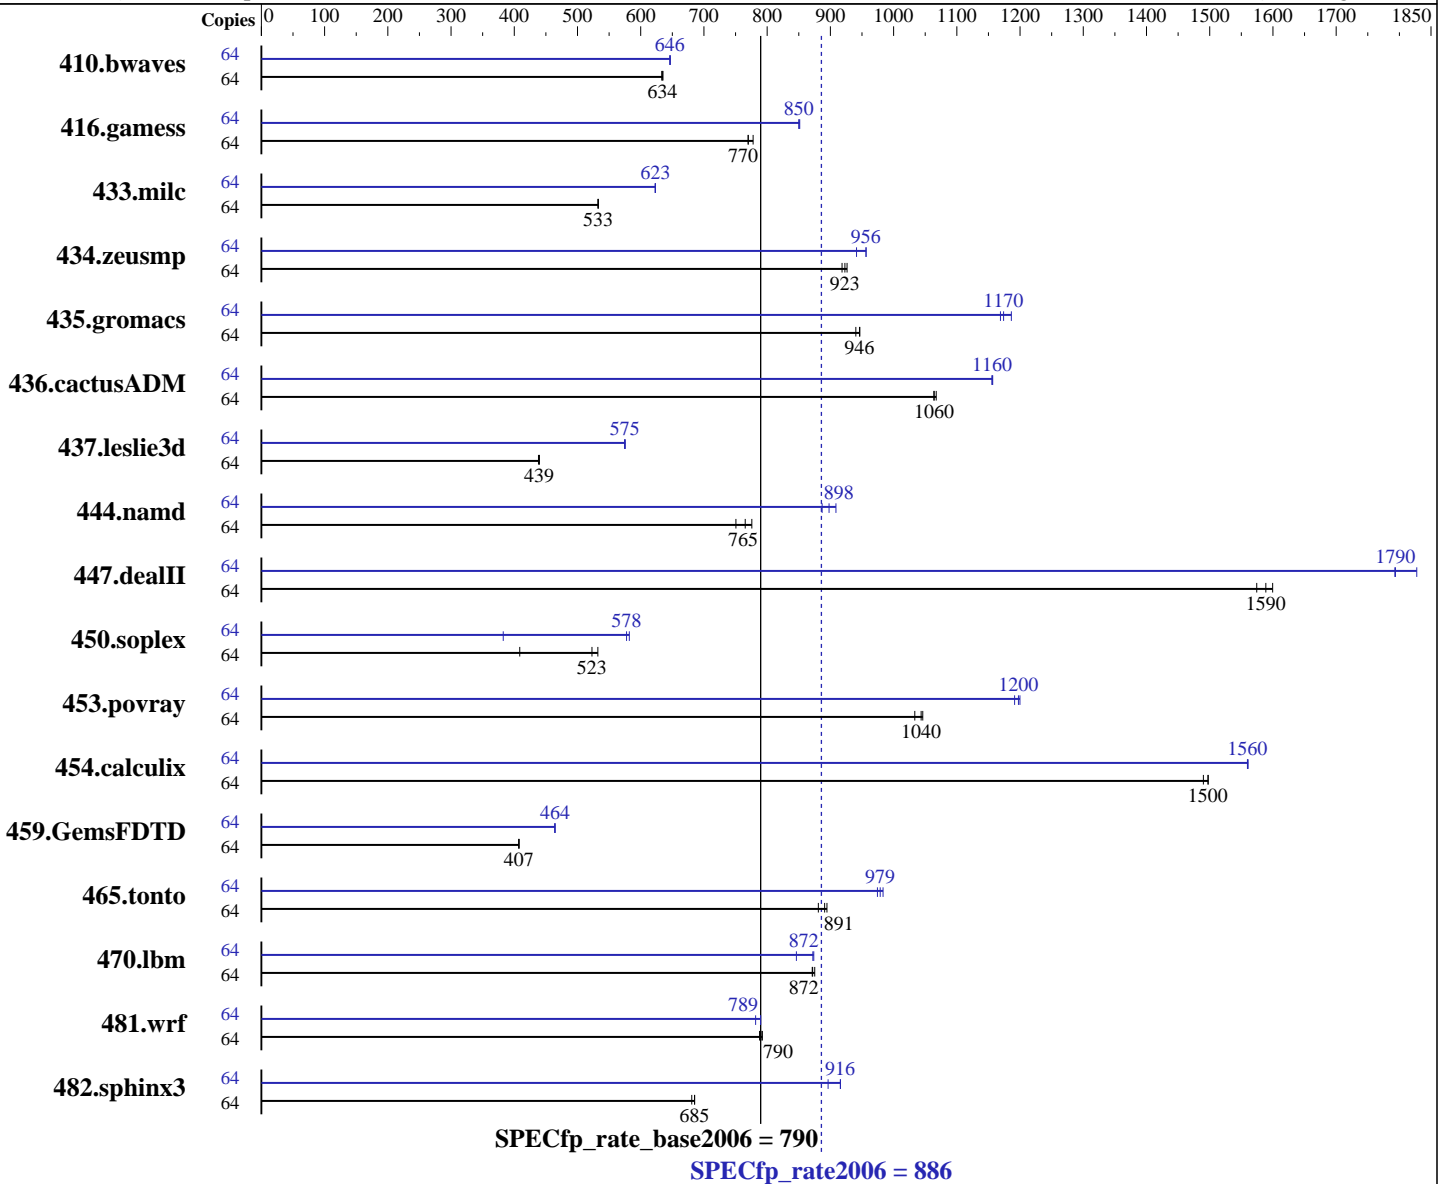

### Hardware

CPU Name: AMD Opteron 6386 SE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip  
 CPU(s) orderable: 2,4 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)  
AMD Opteron 6386 SE

SPECfp\_rate2006 = **886**

SPECfp\_rate\_base2006 = **790**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core  
Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
Other Cache: None  
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1373	633	<u>1371</u>	<u>634</u>	1369	635	64	1345	647	1346	646	<u>1346</u>	<u>646</u>
416.gamess	64	1627	770	<u>1627</u>	<u>770</u>	1611	778	64	1472	851	1474	850	<u>1474</u>	<u>850</u>
433.milc	64	1103	533	<u>1103</u>	<u>533</u>	1103	533	64	943	623	<u>943</u>	<u>623</u>	943	623
434.zeusmp	64	<u>631</u>	<u>923</u>	634	918	629	926	64	<u>609</u>	<u>956</u>	619	941	609	957
435.gromacs	64	486	940	<u>483</u>	<u>946</u>	483	947	64	385	1190	391	1170	<u>389</u>	<u>1170</u>
436.cactusADM	64	719	1060	717	1070	<u>719</u>	<u>1060</u>	64	<u>662</u>	<u>1160</u>	662	1160	661	1160
437.leslie3d	64	<u>1369</u>	<u>439</u>	1368	440	1373	438	64	1047	575	<u>1047</u>	<u>575</u>	1045	576
444.namd	64	684	751	662	776	<u>671</u>	<u>765</u>	64	579	887	<u>572</u>	<u>898</u>	565	909
447.dealII	64	<u>461</u>	<u>1590</u>	465	1570	458	1600	64	401	1830	408	1790	<u>408</u>	<u>1790</u>
450.soplex	64	1306	409	<u>1021</u>	<u>523</u>	1003	532	64	1395	383	<u>924</u>	<u>578</u>	917	582
453.povray	64	325	1050	329	1030	<u>326</u>	<u>1040</u>	64	286	1190	<u>284</u>	<u>1200</u>	284	1200
454.calculix	64	<u>353</u>	<u>1500</u>	354	1490	353	1500	64	338	1560	<u>338</u>	<u>1560</u>	339	1560
459.GemsFDTD	64	<u>1667</u>	<u>407</u>	1666	408	1668	407	64	<u>1462</u>	<u>464</u>	1463	464	1462	465
465.tonto	64	715	881	704	895	<u>707</u>	<u>891</u>	64	646	974	640	983	<u>643</u>	<u>979</u>
470.lbm	64	<u>1008</u>	<u>872</u>	1005	875	1009	871	64	<u>1008</u>	<u>872</u>	1006	874	1039	846
481.wrf	64	<u>905</u>	<u>790</u>	902	792	907	788	64	914	782	905	790	<u>906</u>	<u>789</u>
482.sphinx3	64	1832	681	1820	685	<u>1821</u>	<u>685</u>	64	1362	916	1392	896	<u>1362</u>	<u>916</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)  
AMD Opteron 6386 SE

SPECfp\_rate2006 = 886

SPECfp\_rate\_base2006 = 790

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)  
AMD Opteron 6386 SE

SPECfp\_rate2006 = 886

SPECfp\_rate\_base2006 = 790

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1

### C++ benchmarks:

-Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1 -INLINE:aggressive=on  
-HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET -march=bdver1

### Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd\_peel\_align=on -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

### Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1 -LNO:blocking=off  
-LNO:simd\_peel\_align=on -OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

opencc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)  
AMD Opteron 6386 SE

SPECfp\_rate2006 = 886

SPECfp\_rate\_base2006 = 790

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
-CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2

```

C++ benchmarks:

```

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealIII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)  
AMD Opteron 6386 SE

SPECfp\_rate2006 = 886

SPECfp\_rate\_base2006 = 790

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-CG:pre\_local\_sched=off -CG:p2align=0 -CG:p2align\_split=on

-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m

-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0

-march=bdver2

Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off

-LNO:ignore\_feedback=off -LNO:fu=4 -LNO:loop\_model\_simd=on

-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0

-HP:bd=2m:heap=2m -CG:cmp\_peep=on -march=bdver1

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3

-OPT:recip=on -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

-WOPT:sib=on -march=bdver1

434.zeusmp: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500

-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0 -LNO:fusion=2

-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll\_size=1024

-OPT:unroll\_times\_max=16 -LNO:fission=2

-CG:local\_sched\_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off

-CG:load\_exe=1 -CG:local\_sched\_alg=3 -IPA:plimit=525

-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m

-CG:local\_sched\_alg=2 -CG:load\_exe=3 -GRA:unspill=on

-march=bdver1 -LNO:simd=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0

-LNO:prefetch\_ahead=4 -HP -CG:locs\_shallow\_depth=1

-CG:load\_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll\_size=256 -OPT:alias=disjoint

-GRA:optimize\_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m

-march=bdver1

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)  
AMD Opteron 6386 SE

SPECfp\_rate2006 = 886

SPECfp\_rate\_base2006 = 790

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

## Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
        -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:35:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.