SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R515 (AMD Opteron 4334, 3.10 GHz)

SPECint®_rate2006 = 249

SPECint_rate_base2006 = 222

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2012
Hardware Availability: Nov-2012
Software Availability: Aug-2012

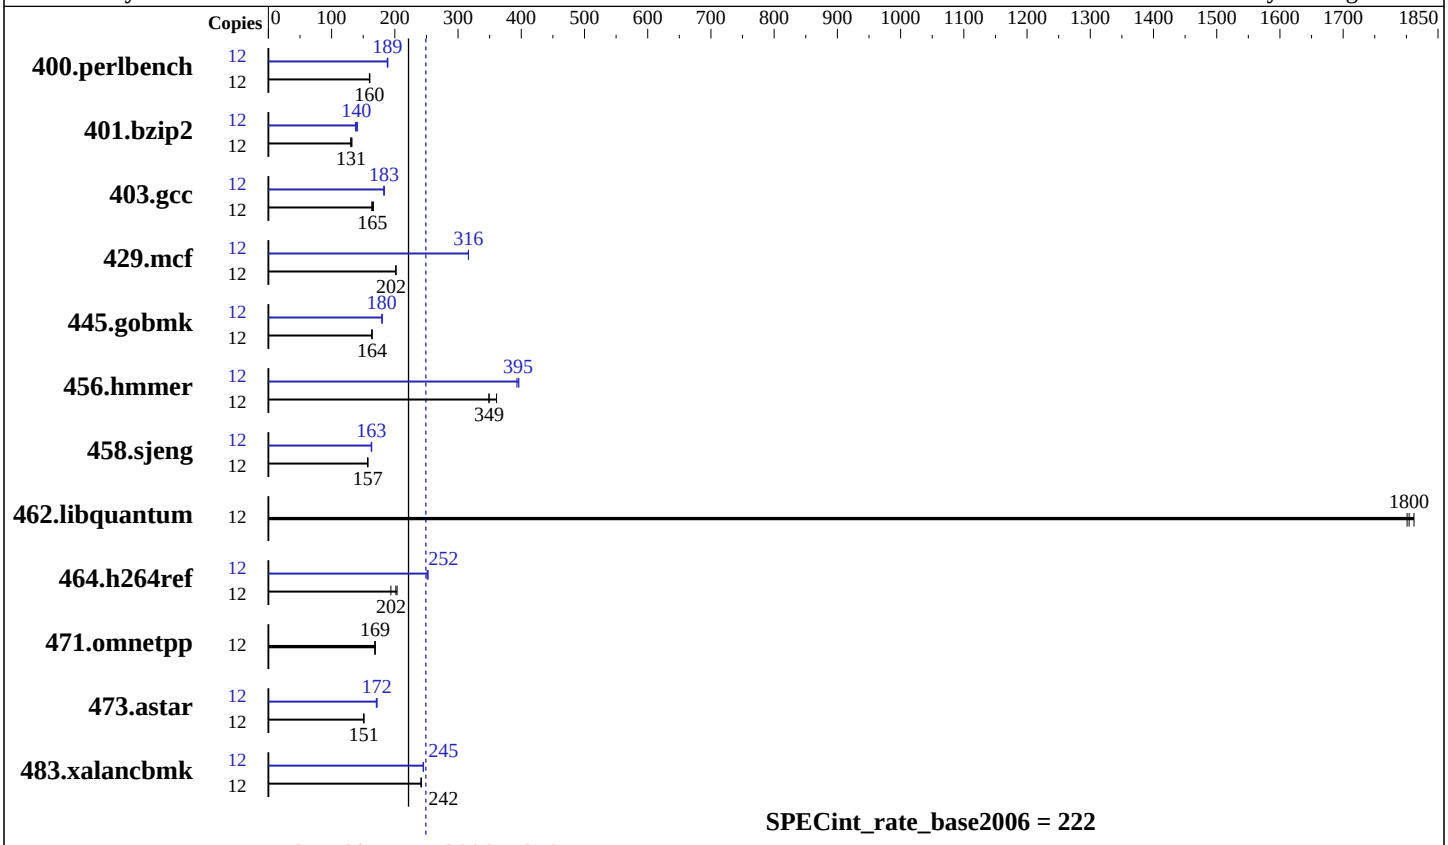

Hardware

CPU Name:	AMD Opteron 4334
CPU Characteristics:	AMD Turbo CORE technology up to 3.50 GHz
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	192 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 1 TB 7200 RPM SATA
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 10.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R515 (AMD Opteron 4334, 3.10 GHz)

SPECint_rate2006 = 249

SPECint_rate_base2006 = 222

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2012
Hardware Availability: Nov-2012
Software Availability: Aug-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	730	161	734	160	**733**	**160**	12	624	188	620	189	**622**	**189**
401.bzip2	12	890	130	**883**	**131**	876	132	12	**830**	**140**	841	138	821	141
403.gcc	12	582	166	**586**	**165**	591	164	12	527	183	**528**	**183**	530	182
429.mcf	12	**543**	**202**	543	201	542	202	12	346	316	346	317	**346**	**316**
445.gobmk	12	769	164	**768**	**164**	768	164	12	701	180	699	180	**701**	**180**
456.hmmer	12	310	361	**321**	**349**	321	349	12	283	396	**283**	**395**	285	393
458.sjeng	12	926	157	922	157	**924**	**157**	12	**891**	**163**	888	164	892	163
462.libquantum	12	137	1810	**138**	**1800**	138	1800	12	137	1810	**138**	**1800**	138	1800
464.h264ref	12	1305	204	1370	194	**1317**	**202**	12	1052	252	**1052**	**252**	1058	251
471.omnetpp	12	445	168	444	169	**444**	**169**	12	445	168	444	169	**444**	**169**
473.astar	12	558	151	558	151	**558**	**151**	12	493	171	491	172	**491**	**172**
483.xalancbmk	12	343	242	**343**	**242**	342	242	12	338	245	**338**	**245**	337	245

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/amd1206-rate-libs-revA/32:/root/cpu2006-1.2/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1`

462.libquantum: `basepeak = yes`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:unroll_size=256 -OPT:unroll_times_max=2 -IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0 -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on -CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on -OPT:alias=disjoint -INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m -march=bdver1`

483.xalancbmk: `-Ofast -LNO:prefetch=2 -OPT:unroll_size=512 -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET -INLINE:aggressive=on -m32 -CG:cmp_peep=on -CG:local_sched=off -CG:p2align=1 -GRA:unspill=on -TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2 -mno-fma4 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:39:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 January 2013.