



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint[®]_rate2006 = 156

Acer AT310 F2 (Intel Xeon E3-1220 v2)

SPECint_rate_base2006 = 150

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: Jan-2012

Software Availability: Feb-2013

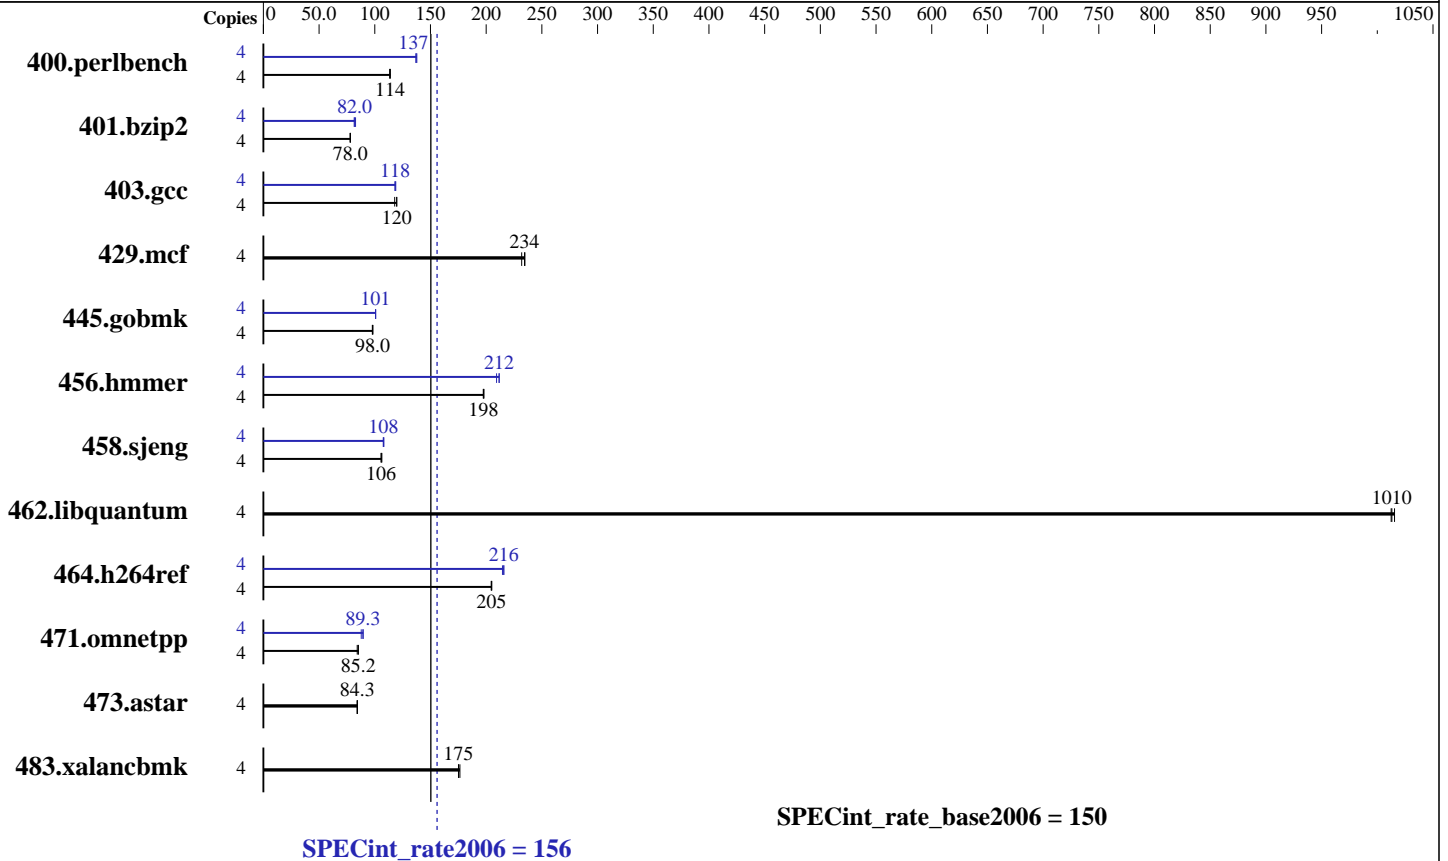

Hardware

CPU Name: Intel Xeon E3-1220 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.5 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM SATA HDD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 156

Acer AT310 F2 (Intel Xeon E3-1220 v2)

SPECint_rate_base2006 = 150

CPU2006 license: 97

Test date: May-2013

Test sponsor: Acer Incorporated

Hardware Availability: Jan-2012

Tested by: Acer Incorporated

Software Availability: Feb-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	343	114	344	114	345	113	4	285	137	285	137	284	138
401.bzip2	4	495	78.0	495	78.0	495	78.0	4	467	82.7	474	81.5	471	82.0
403.gcc	4	273	118	269	120	269	120	4	272	118	271	119	272	118
429.mcf	4	156	234	155	235	157	232	4	156	234	155	235	157	232
445.gobmk	4	426	98.4	428	98.0	429	97.8	4	416	101	417	101	416	101
456.hammer	4	189	198	188	198	189	197	4	176	212	176	212	178	209
458.sjeng	4	455	106	457	106	458	106	4	450	108	449	108	447	108
462.libquantum	4	81.6	1020	81.8	1010	81.9	1010	4	81.6	1020	81.8	1010	81.9	1010
464.h264ref	4	432	205	432	205	433	205	4	410	216	412	215	410	216
471.omnetpp	4	294	85.2	293	85.3	297	84.2	4	285	87.9	280	89.3	279	89.6
473.astar	4	333	84.3	334	84.2	332	84.5	4	333	84.3	334	84.2	332	84.5
483.xalancbmk	4	156	176	158	175	157	175	4	156	176	158	175	157	175

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Wed May 15 03:04:55 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1220 V2 @ 3.10GHz
1 "physical id"s (chips)
4 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings : 4
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 156

Acer AT310 F2 (Intel Xeon E3-1220 v2)

SPECint_rate_base2006 = 150

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2013
Hardware Availability: Jan-2012
Software Availability: Feb-2013

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      16299196 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 15 03:03
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                ext4      434G  12G  401G   3% /
```

```
Additional information from dmidecode:
BIOS Acer P10 11/23/2012
Memory:
2x 8 GB
2x Kingston ACR1GX72D3E16C11G 8 GB 1600 MHz 2 rank
2x [Empty] [Empty]
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 156

Acer AT310 F2 (Intel Xeon E3-1220 v2)

SPECint_rate_base2006 = 150

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: Jan-2012

Software Availability: Feb-2013

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 156

Acer AT310 F2 (Intel Xeon E3-1220 v2)

SPECint_rate_base2006 = 150

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: Jan-2012

Software Availability: Feb-2013

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
 -auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
 -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 156

Acer AT310 F2 (Intel Xeon E3-1220 v2)

SPECint_rate_base2006 = 150

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: Jan-2012

Software Availability: Feb-2013

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-revA.20130423.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-revA.20130423.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:47:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 June 2013.