



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECint®\_rate2006 = 461

### Altos R380 F2 (Intel Xeon E5-2640)

SPECint\_rate\_base2006 = 444

CPU2006 license: 97


Test date: May-2013

Test sponsor: Acer Incorporated

Hardware Availability: May-2013

Tested by: Acer Incorporated

Software Availability: Feb-2013

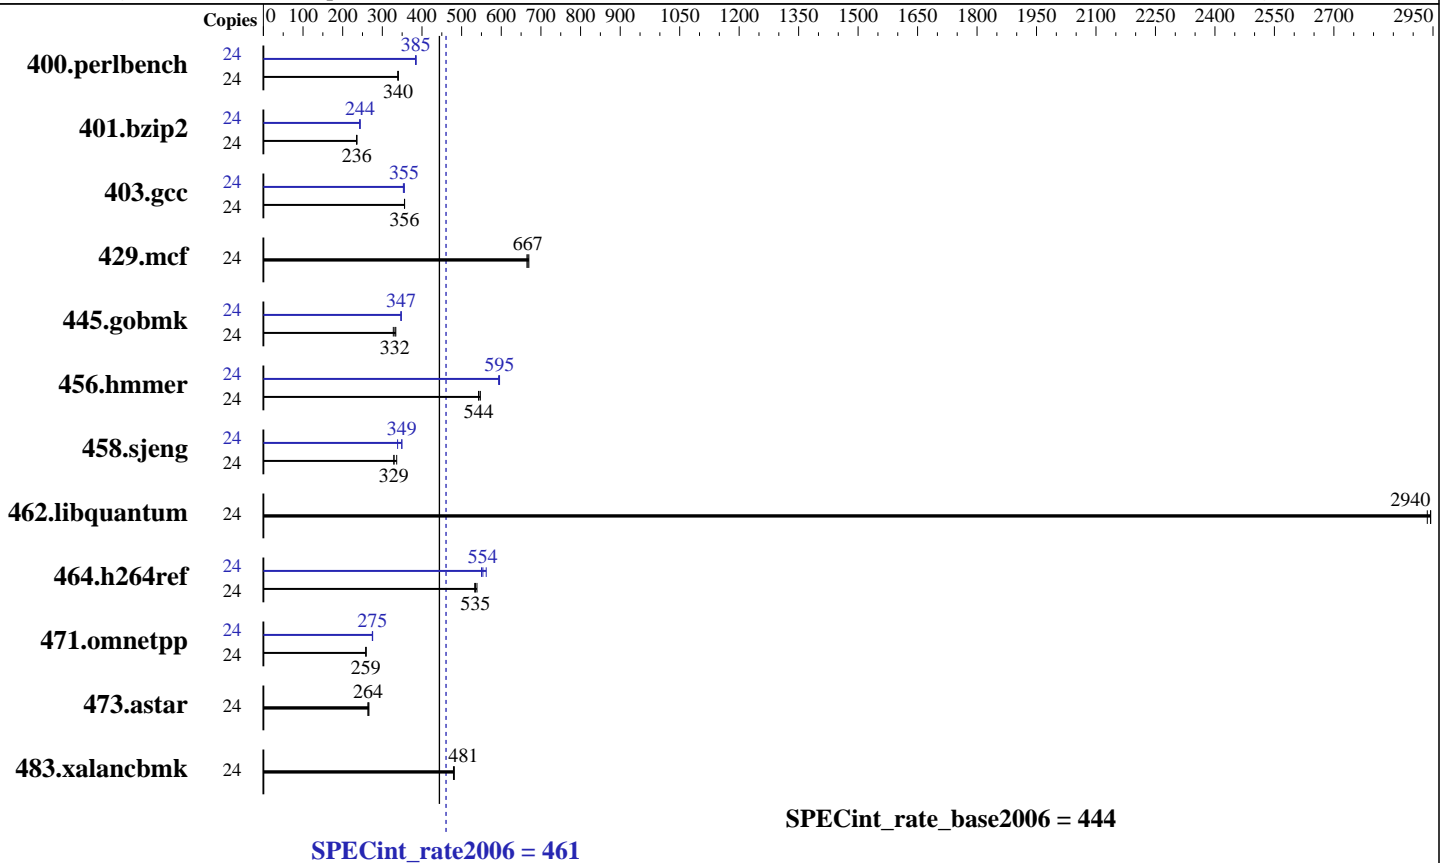

#### Hardware

CPU Name: Intel Xeon E5-2640  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x 900 GB SAS, 10K RPM  
 Other Hardware: None

#### Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 461

Altos R380 F2 (Intel Xeon E5-2640)

SPECint\_rate\_base2006 = 444

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: May-2013

Software Availability: Feb-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>690</b>	<b>340</b>	692	339	689	340	24	<b>610</b>	<b>385</b>	609	385	611	384
401.bzip2	24	985	235	<b>983</b>	<b>236</b>	983	236	24	<b>950</b>	<b>244</b>	949	244	953	243
403.gcc	24	543	356	542	356	<b>543</b>	<b>356</b>	24	544	355	<b>544</b>	<b>355</b>	547	353
429.mcf	24	327	670	<b>328</b>	<b>667</b>	329	665	24	327	670	<b>328</b>	<b>667</b>	329	665
445.gobmk	24	768	328	754	334	<b>759</b>	<b>332</b>	24	<b>725</b>	<b>347</b>	725	347	725	347
456.hammer	24	<b>412</b>	<b>544</b>	409	547	413	543	24	376	596	377	593	<b>376</b>	<b>595</b>
458.sjeng	24	<b>881</b>	<b>329</b>	882	329	864	336	24	858	339	832	349	<b>832</b>	<b>349</b>
462.libquantum	24	<b>169</b>	<b>2940</b>	169	2940	169	2940	24	<b>169</b>	<b>2940</b>	169	2940	169	2940
464.h264ref	24	986	539	996	533	<b>993</b>	<b>535</b>	24	<b>959</b>	<b>554</b>	965	550	945	562
471.omnetpp	24	579	259	580	258	<b>580</b>	<b>259</b>	24	545	275	546	275	<b>545</b>	<b>275</b>
473.astar	24	638	264	633	266	<b>637</b>	<b>264</b>	24	638	264	633	266	<b>637</b>	<b>264</b>
483.xalancbmk	24	<b>344</b>	<b>481</b>	344	481	345	479	24	<b>344</b>	<b>481</b>	344	481	345	479

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on r380f2 Mon May 27 16:53:33 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2640 0 @ 2.50GHz  
2 "physical id"s (chips)  
24 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 6  
siblings : 12

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECint\_rate2006 = 461**

**Altos R380 F2 (Intel Xeon E5-2640)**

**SPECint\_rate\_base2006 = 444**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** May-2013

**Hardware Availability:** May-2013

**Software Availability:** Feb-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132078104 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux r380f2 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 27 16:46
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3       ext4      274G  8.1G  252G   4% /
```

```
Additional information from dmidecode:
BIOS Intel Corp. SE5C600.86B.01.06.0002.110120121539 11/01/2012
Memory:
16x 8 GB
16x Hynix HMT31GR7CFR4C-PB 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Altos R360 F2 and Altos R380 F2 are electronically equivalent.  
This result was measured on Altos R380 F2.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 461

Altos R380 F2 (Intel Xeon E5-2640)

SPECint\_rate\_base2006 = 444

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: May-2013

Software Availability: Feb-2013

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 461

Altos R380 F2 (Intel Xeon E5-2640)

SPECint\_rate\_base2006 = 444

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: May-2013

Software Availability: Feb-2013

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias  
403.gcc: -xAVX -ipo -O3 -no-prec-div  
429.mcf: basepeak = yes  
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap  
473.astar: basepeak = yes  
483.xalanbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECint\_rate2006 = 461**

**Altos R380 F2 (Intel Xeon E5-2640)**

**SPECint\_rate\_base2006 = 444**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** May-2013

**Hardware Availability:** May-2013

**Software Availability:** Feb-2013

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-revA.20130423.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-revA.20130423.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:47:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 June 2013.