



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint[®]_rate2006 = 1120

ProLiant BL685c G7
(2.50 GHz, AMD Opteron 6380)

SPECint_rate_base2006 = 978

CPU2006 license: 3


Test date: Jul-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2012

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

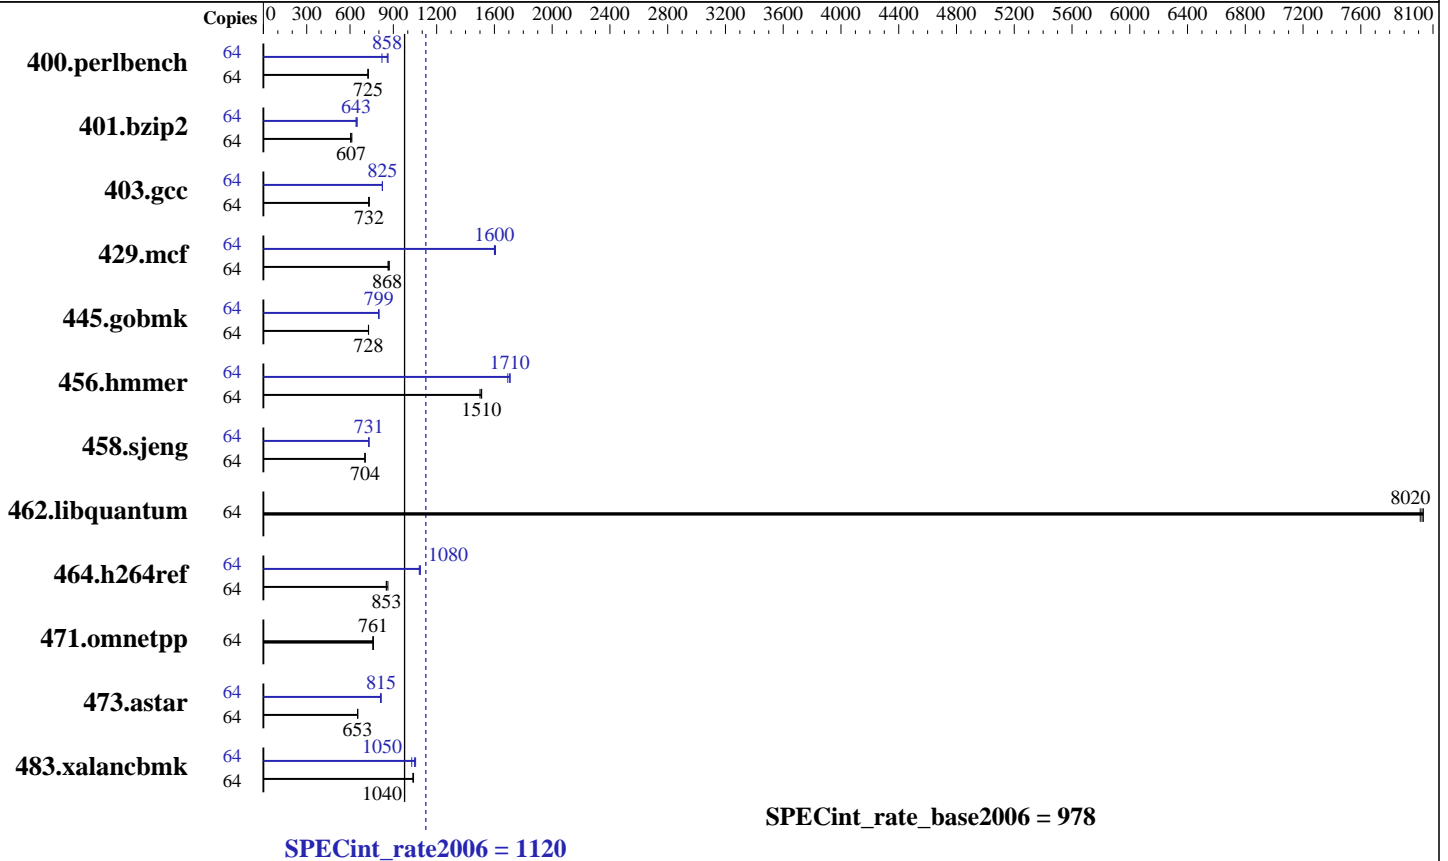

Hardware

CPU Name: AMD Opteron 6380
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4,
Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite
(from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1120

ProLiant BL685c G7
(2.50 GHz, AMD Opteron 6380)

SPECint_rate_base2006 = 978

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2013
Hardware Availability: Nov-2012
Software Availability: Feb-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	862	725	862	725	863	725	64	761	821	724	863	729	858
401.bzip2	64	1008	613	1023	604	1018	607	64	960	643	961	643	950	650
403.gcc	64	703	733	707	729	703	732	64	626	824	625	825	625	825
429.mcf	64	669	872	672	868	676	863	64	365	1600	363	1610	365	1600
445.gobmk	64	922	728	922	728	923	727	64	840	799	839	800	840	799
456.hammer	64	398	1500	396	1510	395	1510	64	349	1710	353	1690	350	1710
458.sjeng	64	1100	704	1101	703	1100	704	64	1060	730	1059	731	1060	731
462.libquantum	64	165	8020	166	8010	165	8030	64	165	8020	166	8010	165	8030
464.h264ref	64	1661	853	1642	862	1665	851	64	1312	1080	1303	1090	1306	1080
471.omnetpp	64	525	761	528	758	525	761	64	525	761	528	758	525	761
473.astar	64	689	652	688	653	687	654	64	551	815	552	815	554	811
483.xalancbmk	64	425	1040	426	1040	426	1040	64	419	1050	430	1030	422	1050

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS Configuration:
HP Power Profile set to Maximum Performance
HP Power Regulator set to HP Static High Performance Mode
Thermal Configuration set to Increased Cooling



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1120

ProLiant BL685c G7
(2.50 GHz, AMD Opteron 6380)

SPECint_rate_base2006 = 978

CPU2006 license: 3

Test date: Jul-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2012

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/cpu2006/amd1206-rate-libs-revA/32:/cpu2006/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:

-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1120

ProLiant BL685c G7
(2.50 GHz, AMD Opteron 6380)

SPECint_rate_base2006 = 978

CPU2006 license: 3

Test date: Jul-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2012

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1120

ProLiant BL685c G7
(2.50 GHz, AMD Opteron 6380)

SPECint_rate_base2006 = 978

CPU2006 license: 3

Test date: Jul-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2012

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

Peak Optimization Flags (Continued)

445.gobmk (continued):

-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

456.hmmr: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: basepeak = yes

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3

-OPT:unroll_size=256 -OPT:unroll_times_max=2
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512

-OPT:unroll_times_max=8 -D_OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
-mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20130327.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20130327.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL685c G7
(2.50 GHz, AMD Opteron 6380)

SPECint_rate2006 = 1120

SPECint_rate_base2006 = 978

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2013
Hardware Availability: Nov-2012
Software Availability: Feb-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:33:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 July 2013.