



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 488

Express5800/R120e-1M (Intel Xeon E5-2697 v2)

SPECint_rate_base2006 = 473

CPU2006 license: 9006


Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

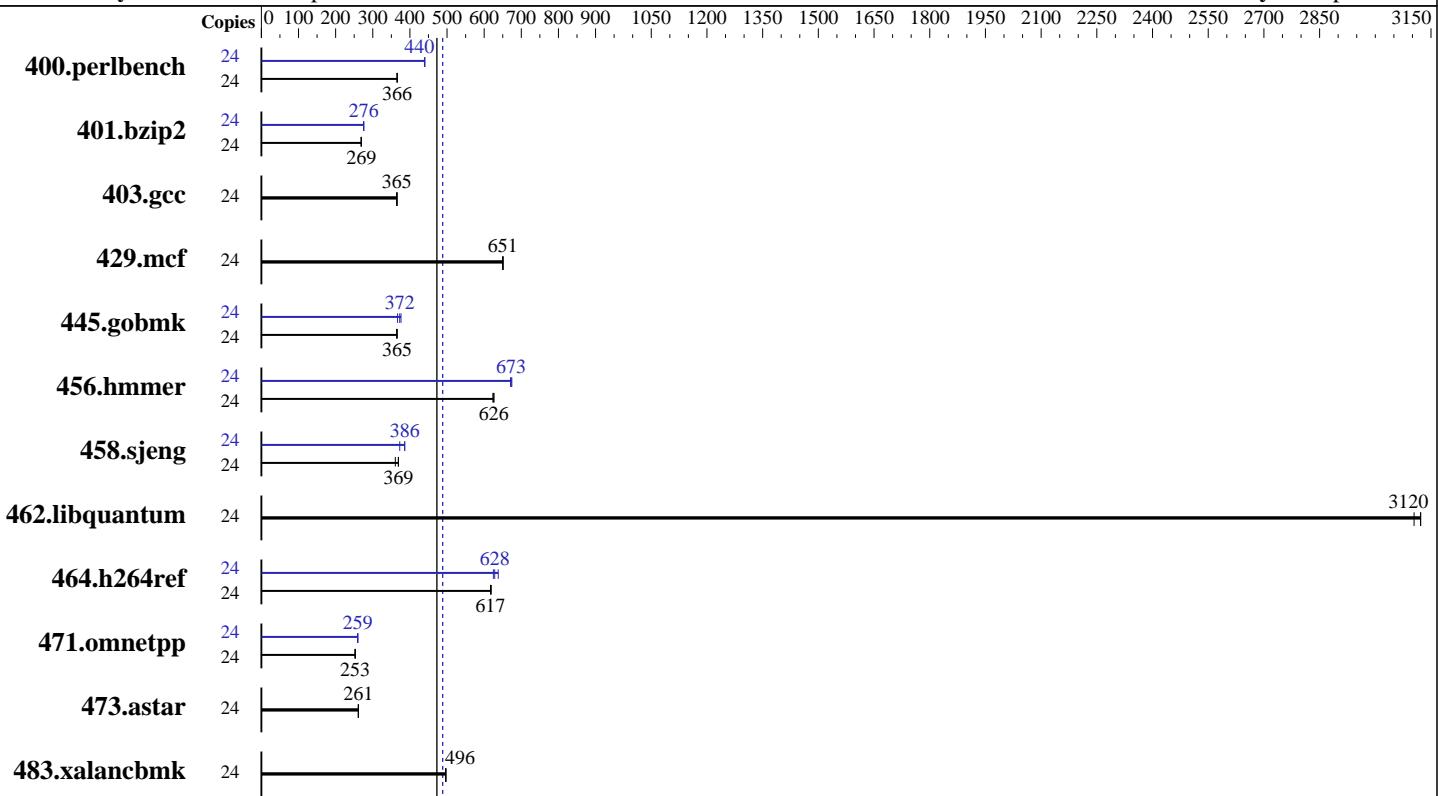

SPECint_rate2006 = 488

SPECint_rate2006 = 488

Hardware

CPU Name: Intel Xeon E5-2697 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 12 cores, 1 chip, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Compiler: Kernel 2.6.32-358.18.1.el6.x86_64
 C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120e-1M (Intel Xeon E5-2697 v2)

SPECint_rate2006 = 488

SPECint_rate_base2006 = 473

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	641	366	641	366	642	366	24	533	440	533	440	534	439
401.bzip2	24	863	268	860	269	860	269	24	841	276	841	275	840	276
403.gcc	24	530	364	528	366	530	365	24	530	364	528	366	530	365
429.mcf	24	336	651	336	651	337	650	24	336	651	336	651	337	650
445.gobmk	24	688	366	691	364	689	365	24	687	367	670	376	676	372
456.hammer	24	359	623	358	626	358	626	24	334	671	333	673	332	675
458.sjeng	24	787	369	805	361	787	369	24	752	386	779	373	752	386
462.libquantum	24	160	3100	159	3120	159	3120	24	160	3100	159	3120	159	3120
464.h264ref	24	858	619	860	617	861	617	24	850	625	833	638	845	628
471.omnetpp	24	593	253	595	252	594	253	24	579	259	577	260	578	259
473.astar	24	644	261	645	261	645	261	24	644	261	645	261	645	261
483.xalancbmk	24	334	496	334	496	333	497	24	334	496	334	496	333	497

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

The Express5800/R120e-1M and

the Express5800/R120e-2M models are electronically equivalent.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120e-1M (Intel Xeon E5-2697 v2)

SPECint_rate2006 = 488

SPECint_rate_base2006 = 473

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

General Notes (Continued)

The results have been measured on the Express5800/R120e-1M model.

Base Compiler Invocation

C benchmarks:

 icc -m32

C++ benchmarks:

 icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

 icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120e-1M (Intel Xeon E5-2697 v2)

SPECint_rate2006 = 488

SPECint_rate_base2006 = 473

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120e-1M (Intel Xeon E5-2697 v2)

SPECint_rate2006 = 488

SPECint_rate_base2006 = 473

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:23:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 November 2013.