



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp®_rate2006 = 471

SPECfp_rate_base2006 = 460

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

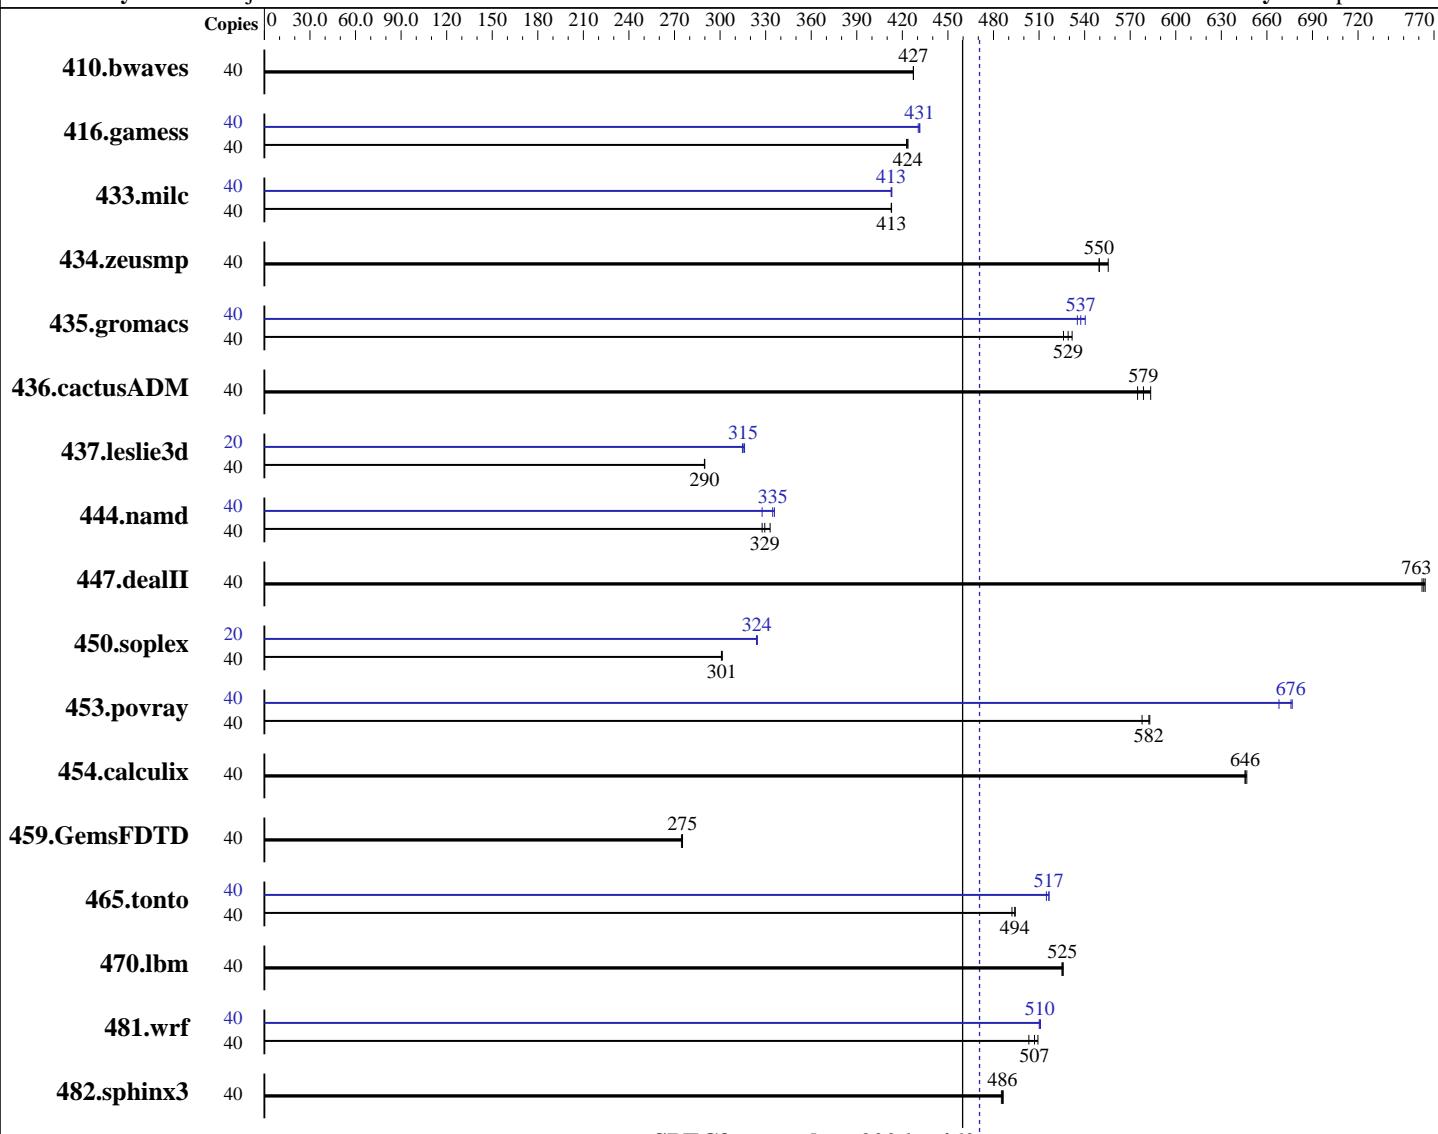

SPECfp_rate_base2006 = 460

SPECfp_rate2006 = 471

Hardware

CPU Name: Intel Xeon E5-2650L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Compiler: 2.6.32-358.11.1.el6.x86_64
 C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp_rate2006 = 471

SPECfp_rate_base2006 = 460

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx8 PC3-14900R-13, ECC, running at 1600 MHz and CL11)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

System State: Run level 5 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1272	427	1272	427	<u>1272</u>	<u>427</u>	40	1272	427	1272	427	<u>1272</u>	<u>427</u>		
416.gamess	40	1853	423	1849	424	<u>1849</u>	<u>424</u>	40	1815	432	<u>1816</u>	<u>431</u>	1819	430		
433.milc	40	890	413	<u>890</u>	<u>413</u>	889	413	40	<u>890</u>	<u>413</u>	889	413	890	413		
434.zeusmp	40	<u>662</u>	<u>550</u>	662	550	655	556	40	<u>662</u>	<u>550</u>	662	550	655	556		
435.gromacs	40	543	526	537	532	<u>540</u>	<u>529</u>	40	534	535	<u>531</u>	<u>537</u>	529	540		
436.cactusADM	40	819	583	832	575	<u>826</u>	<u>579</u>	40	819	583	832	575	<u>826</u>	<u>579</u>		
437.leslie3d	40	1297	290	<u>1297</u>	<u>290</u>	1298	290	20	595	316	<u>596</u>	<u>315</u>	597	315		
444.namd	40	<u>974</u>	<u>329</u>	979	328	964	333	40	979	328	955	336	<u>959</u>	<u>335</u>		
447.dealII	40	<u>600</u>	<u>763</u>	599	764	600	762	40	<u>600</u>	<u>763</u>	599	764	600	762		
450.soplex	40	<u>1107</u>	<u>301</u>	1109	301	1107	301	20	514	325	515	324	<u>514</u>	<u>324</u>		
453.povray	40	365	583	<u>365</u>	<u>582</u>	368	578	40	<u>315</u>	<u>676</u>	319	668	314	677		
454.calculix	40	<u>511</u>	<u>646</u>	511	646	510	647	40	<u>511</u>	<u>646</u>	511	646	510	647		
459.GemsFDTD	40	<u>1542</u>	<u>275</u>	1546	275	1542	275	40	<u>1542</u>	<u>275</u>	1546	275	1542	275		
465.tonto	40	<u>797</u>	<u>494</u>	796	494	800	492	40	<u>765</u>	<u>515</u>	<u>762</u>	<u>517</u>	762	517		
470.lbm	40	1047	525	<u>1046</u>	<u>525</u>	1045	526	40	1047	<u>525</u>	<u>1046</u>	<u>525</u>	1045	526		
481.wrf	40	888	503	<u>881</u>	<u>507</u>	877	509	40	<u>875</u>	<u>510</u>	876	510	874	511		
482.sphinx3	40	1607	485	<u>1604</u>	<u>486</u>	1603	486	40	1607	485	<u>1604</u>	<u>486</u>	1603	486		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp_rate2006 = 471

SPECfp_rate_base2006 = 460

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Platform Notes

BIOS configuration:
Energy Performance = Performance

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/SPECcpu2006/lib32:/SPECcpu2006/lib64:/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp_rate2006 = 471

SPECfp_rate_base2006 = 460

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Base Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp_rate2006 = 471

SPECfp_rate_base2006 = 460

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
          -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
          -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
          -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
          -prof-use(pass 2) -unroll14 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp_rate2006 = 471

SPECfp_rate_base2006 = 460

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 18:01:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 December 2013.