



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 308

ProLiant DL360e Gen8
(2.00 GHz, Intel Xeon E5-2430L)

SPECfp_rate_base2006 = 301

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Nov-2013

Hardware Availability: Jul-2012

Software Availability: Oct-2013

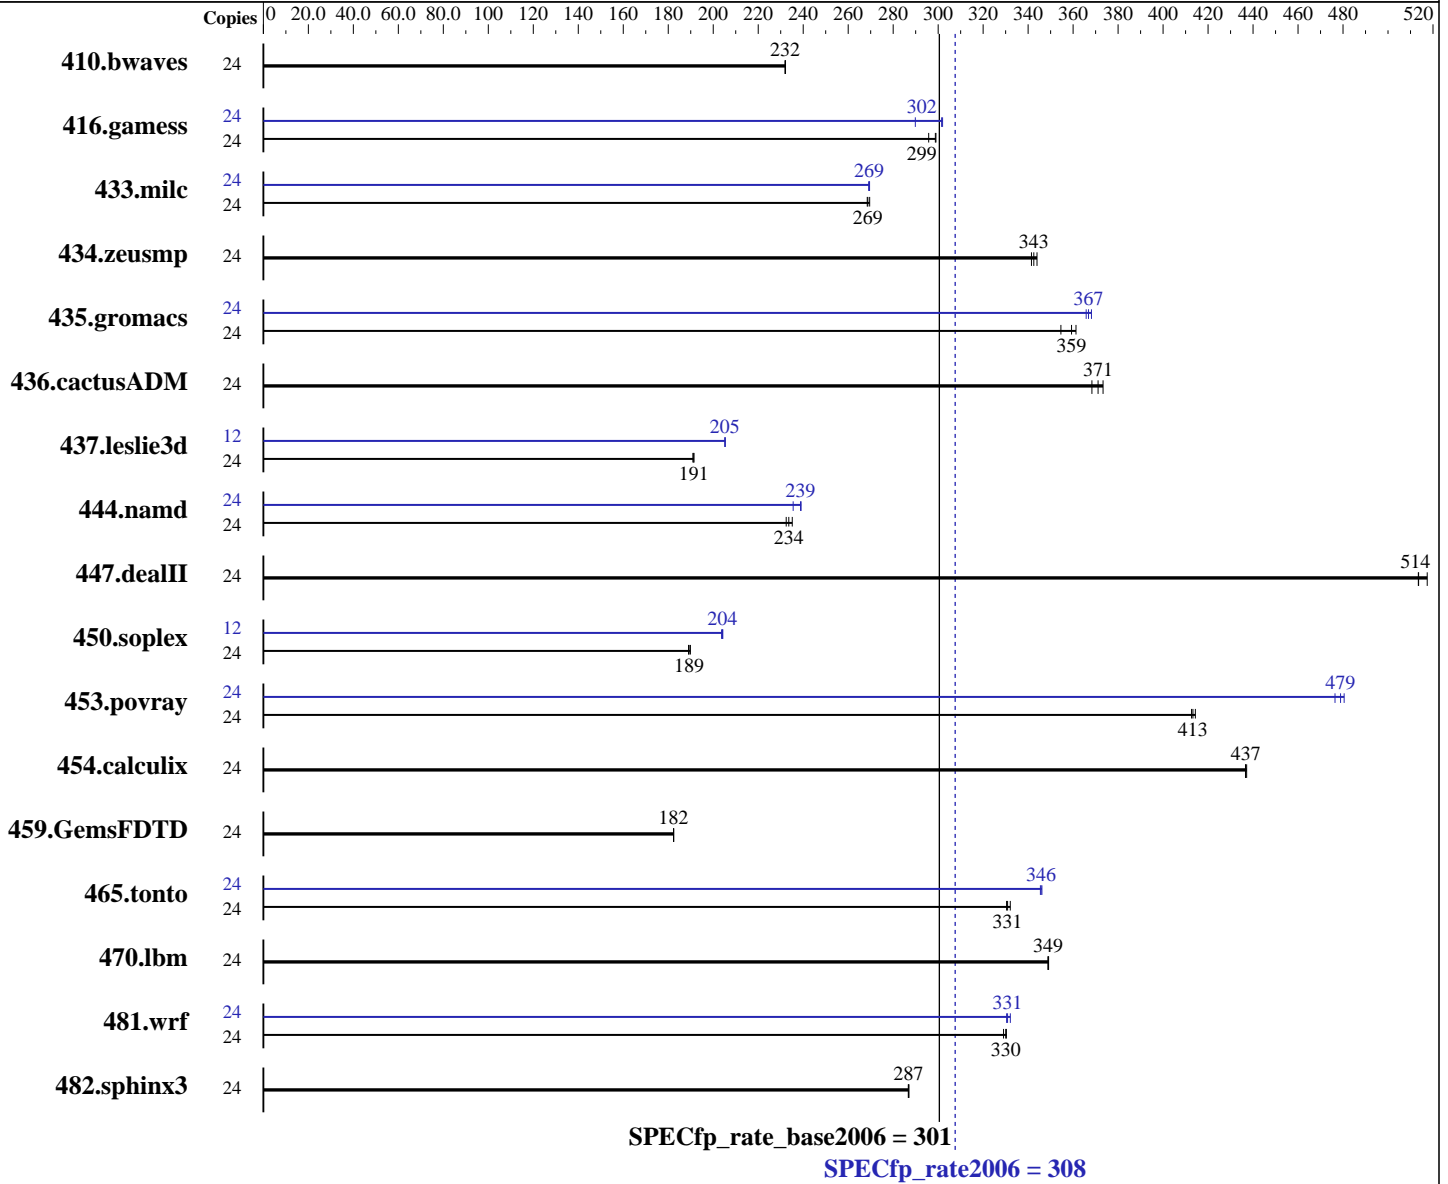

Hardware

CPU Name: Intel Xeon E5-2430L
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 308

ProLiant DL360e Gen8
(2.00 GHz, Intel Xeon E5-2430L)

SPECfp_rate_base2006 = 301

CPU2006 license: 3

Test date: Nov-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2012

Tested by: Hewlett-Packard Company

Software Availability: Oct-2013

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem: 2 x 300 GB 10 K SAS, RAID 1
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: HP Array Configuration Utility, CLI version

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1406	232	1406	232	1405	232	24	1406	232	1406	232	1405	232
416.gamess	24	1572	299	1573	299	1589	296	24	1558	302	1556	302	1621	290
433.milc	24	820	269	817	270	821	268	24	818	270	819	269	818	269
434.zeusmp	24	640	341	638	343	635	344	24	640	341	638	343	635	344
435.gromacs	24	477	359	474	361	483	355	24	465	368	467	367	468	366
436.cactusADM	24	773	371	779	368	768	373	24	773	371	779	368	768	373
437.leslie3d	24	1179	191	1181	191	1179	191	12	550	205	549	205	550	205
444.namd	24	819	235	824	234	828	232	24	817	236	806	239	805	239
447.dealII	24	531	517	535	514	535	513	24	531	517	535	514	535	513
450.soplex	24	1054	190	1058	189	1059	189	12	490	204	490	204	491	204
453.povray	24	309	413	308	414	309	413	24	266	480	268	476	267	479
454.calculix	24	453	437	453	437	453	437	24	453	437	453	437	453	437
459.GemsFDTD	24	1396	182	1396	182	1396	182	24	1396	182	1396	182	1396	182
465.tonto	24	711	332	715	330	714	331	24	682	346	684	345	683	346
470.lbm	24	945	349	945	349	945	349	24	945	349	945	349	945	349
481.wrf	24	815	329	812	330	812	330	24	811	330	807	332	810	331
482.sphinx3	24	1630	287	1631	287	1631	287	24	1630	287	1631	287	1631	287

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 308

ProLiant DL360e Gen8
(2.00 GHz, Intel Xeon E5-2430L)

SPECfp_rate_base2006 = 301

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Nov-2013
Hardware Availability: Jul-2012
Software Availability: Oct-2013

Operating System Notes (Continued)

Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write
in HP Array Configuration Utility, CLI version
Disabled unused Linux services through "stop_services.sh" before running.

Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1X

Sysinfo program /cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Sat Nov 9 06:11:14 2013

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2430L 0 @ 2.00GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal:      99032972 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 308

ProLiant DL360e Gen8
(2.00 GHz, Intel Xeon E5-2430L)

SPECfp_rate_base2006 = 301

CPU2006 license: 3

Test date: Nov-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2012

Tested by: Hewlett-Packard Company

Software Availability: Oct-2013

Platform Notes (Continued)

run-level 3 Nov 8 15:15

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	66G	31G	32G	50%	/

Additional information from dmidecode:

BIOS HP P73 07/01/2013

Memory:

12x HP 689911-071 8 GB 1333 MHz 2 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 308

ProLiant DL360e Gen8
(2.00 GHz, Intel Xeon E5-2430L)

SPECfp_rate_base2006 = 301

CPU2006 license: 3

Test date: Nov-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2012

Tested by: Hewlett-Packard Company

Software Availability: Oct-2013

Base Portability Flags (Continued)

```
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 308

ProLiant DL360e Gen8
(2.00 GHz, Intel Xeon E5-2430L)

SPECfp_rate_base2006 = 301

CPU2006 license: 3

Test date: Nov-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2012

Tested by: Hewlett-Packard Company

Software Availability: Oct-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 308

ProLiant DL360e Gen8
(2.00 GHz, Intel Xeon E5-2430L)

SPECfp_rate_base2006 = 301

CPU2006 license: 3

Test date: Nov-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2012

Tested by: Hewlett-Packard Company

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 18:15:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 December 2013.