



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp®_rate2006 = 431

SPECfp_rate_base2006 = 426

CPU2006 license: 9008


Test date: Jan-2014

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

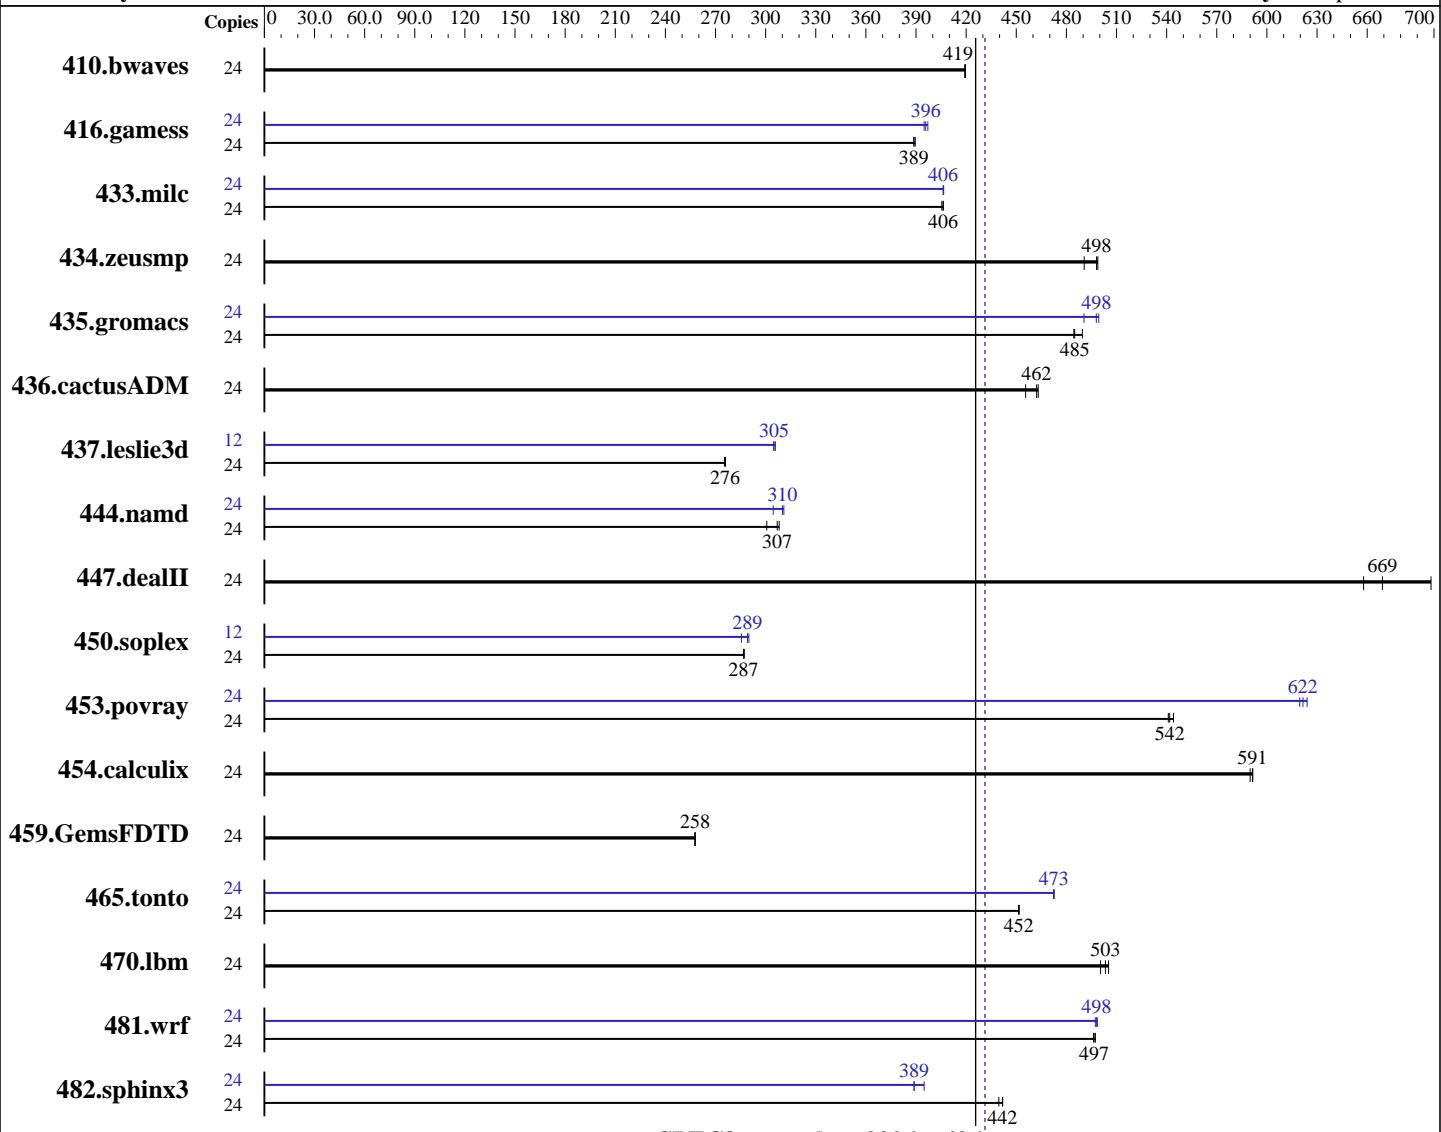

SPECfp_rate_base2006 = 426

SPECfp_rate2006 = 431

Hardware

CPU Name: Intel Xeon E5-2630 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
CPU MHz: 2600
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.11.1.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate2006 = 431

SPECfp_rate_base2006 = 426

CPU2006 license: 9008

Test date: Jan-2014

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL11)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	777	420	<u>778</u>	<u>419</u>	778	419	24	777	420	<u>778</u>	<u>419</u>	778	419	778	419
416.gamess	24	1206	390	<u>1209</u>	<u>389</u>	1209	389	24	1190	395	<u>1187</u>	<u>396</u>	1183	397	1183	397
433.milc	24	<u>542</u>	<u>406</u>	542	406	543	405	24	542	407	542	406	<u>542</u>	<u>406</u>	542	<u>406</u>
434.zeusmp	24	445	491	<u>439</u>	<u>498</u>	438	499	24	445	491	<u>439</u>	<u>498</u>	438	499	438	499
435.gromacs	24	350	490	354	484	<u>353</u>	<u>485</u>	24	349	491	343	499	<u>344</u>	<u>498</u>	344	<u>498</u>
436.cactusADM	24	629	456	<u>621</u>	<u>462</u>	619	463	24	629	456	<u>621</u>	<u>462</u>	619	463	619	463
437.leslie3d	24	<u>818</u>	<u>276</u>	817	276	819	275	12	369	306	<u>370</u>	<u>305</u>	370	305	370	305
444.namd	24	<u>627</u>	<u>307</u>	640	301	625	308	24	<u>621</u>	<u>310</u>	632	305	619	311	619	311
447.dealII	24	393	698	417	658	<u>410</u>	<u>669</u>	24	393	698	417	658	<u>410</u>	<u>669</u>	410	<u>669</u>
450.soplex	24	697	287	<u>698</u>	<u>287</u>	698	287	12	<u>346</u>	<u>289</u>	351	286	<u>345</u>	<u>290</u>	345	290
453.povray	24	235	544	<u>236</u>	<u>542</u>	236	541	24	205	624	206	620	<u>205</u>	<u>622</u>	205	<u>622</u>
454.calculix	24	<u>335</u>	<u>591</u>	335	592	336	590	24	<u>335</u>	<u>591</u>	335	592	336	590	336	590
459.GemsFDTD	24	988	258	<u>988</u>	<u>258</u>	988	258	24	988	258	<u>988</u>	<u>258</u>	988	258	988	258
465.tonto	24	523	452	<u>523</u>	<u>452</u>	523	451	24	<u>500</u>	<u>473</u>	500	472	500	473	500	473
470.lbm	24	<u>655</u>	<u>503</u>	659	500	653	505	24	<u>655</u>	<u>503</u>	659	500	<u>653</u>	<u>505</u>	653	505
481.wrf	24	540	496	<u>540</u>	<u>497</u>	539	497	24	538	499	539	497	<u>538</u>	<u>498</u>	538	<u>498</u>
482.sphinx3	24	<u>1059</u>	<u>442</u>	1059	442	1064	440	24	1185	395	1203	389	<u>1203</u>	<u>389</u>	1203	<u>389</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate2006 = 431

SPECfp_rate_base2006 = 426

CPU2006 license: 9008

Test date: Jan-2014

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

Platform Notes

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on windows-dedevhl.action.pl Sun Feb 2 01:36:44 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2630 v2 @ 2.60GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
    cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:      132126496 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux windows-dedevhl.action.pl 2.6.32-358.11.1.el6.x86_64 #1 SMP Tue Nov 19
17:43:04 CET 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 31 08:56
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  193G   86G   98G  47%  /
```

Additional information from dmidecode:

BIOS American Megatrends Inc. 3.0a 07/31/2013

Memory:

16x 8 GB

16x Hynix Semiconductor HMT31GR7EFR4C 8 GB 1600 MHz 1 rank

(End of data from sysinfo program)

dmidecode does not properly detect memory modules
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A. ACTINA SOLAR 210 S5 (Intel Xeon E5-2630 v2, 2.60 GHz)	SPECfp_rate2006 = 431 SPECfp_rate_base2006 = 426
CPU2006 license: 9008	Test date: Jan-2014
Test sponsor: ACTION S.A.	Hardware Availability: Oct-2013
Tested by: ACTION S.A.	Software Availability: Sep-2013

Platform Notes (Continued)

16 modules of 8 GB were used to run the test (128 GB total)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Binaries compiled on a system with 2x Xeon E5-2650 v2 chips

+ 256 GB memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A. ACTINA SOLAR 210 S5 (Intel Xeon E5-2630 v2, 2.60 GHz)	SPECfp_rate2006 = 431 SPECfp_rate_base2006 = 426
CPU2006 license: 9008	Test date: Jan-2014
Test sponsor: ACTION S.A.	Hardware Availability: Oct-2013
Tested by: ACTION S.A.	Software Availability: Sep-2013

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate2006 = 431

SPECfp_rate_base2006 = 426

CPU2006 license: 9008

Test date: Jan-2014

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

Peak Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
              -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate2006 = 431

SPECfp_rate_base2006 = 426

CPU2006 license: 9008

Test date: Jan-2014

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 20:10:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 February 2014.