



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp®2006 = 66.7

SPECfp_base2006 = 64.7

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

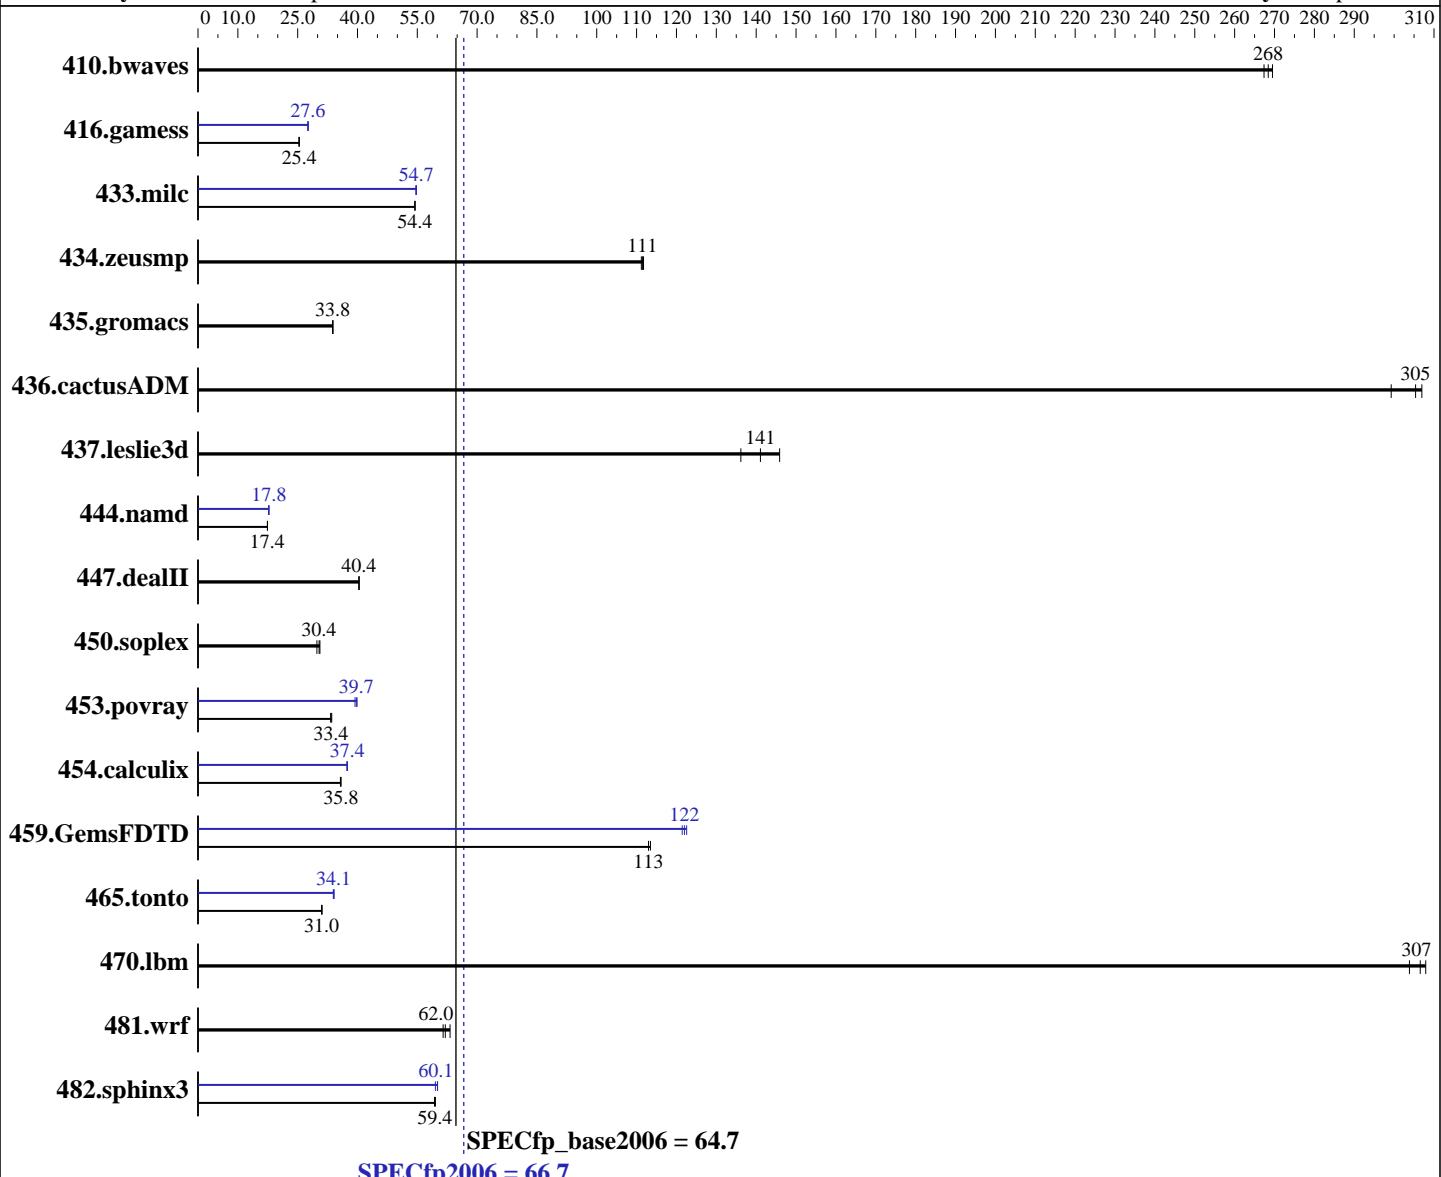

Hardware

CPU Name: Intel Xeon E5-2609 v2
CPU Characteristics:
CPU MHz: 2500
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp2006 = 66.7

SPECfp_base2006 = 64.7

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	50.6	268	50.4	269	50.8	267	50.6	268	50.4	269	50.8	267
416.gamess	772	25.4	772	25.4	771	25.4	709	27.6	709	27.6	710	27.6
433.milc	169	54.4	169	54.4	169	54.4	168	54.8	168	54.7	168	54.7
434.zeusmp	81.4	112	81.8	111	81.6	111	81.4	112	81.8	111	81.6	111
435.gromacs	211	33.8	211	33.8	212	33.8	211	33.8	211	33.8	212	33.8
436.cactusADM	39.9	299	39.1	305	38.9	307	39.9	299	39.1	305	38.9	307
437.leslie3d	69.0	136	66.6	141	64.4	146	69.0	136	66.6	141	64.4	146
444.namd	460	17.4	460	17.4	460	17.4	452	17.8	451	17.8	451	17.8
447.dealII	283	40.4	283	40.4	283	40.4	283	40.4	283	40.4	283	40.4
450.soplex	280	29.8	275	30.4	273	30.6	280	29.8	275	30.4	273	30.6
453.povray	160	33.3	160	33.4	159	33.5	134	39.7	135	39.4	133	39.9
454.calculix	230	35.8	231	35.7	230	35.8	220	37.5	221	37.4	220	37.4
459.GemsFDTD	93.9	113	93.5	113	93.9	113	87.4	121	87.0	122	86.6	123
465.tonto	317	31.0	316	31.1	318	31.0	290	33.9	289	34.1	288	34.1
470.lbm	44.8	307	44.6	308	45.2	304	44.8	307	44.6	308	45.2	304
481.wrf	182	61.5	177	63.2	180	62.0	182	61.5	177	63.2	180	62.0
482.sphinx3	327	59.5	329	59.3	328	59.4	327	59.5	324	60.1	325	60.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0

Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191

running on x3650M4BD Tue Jun 17 18:03:06 2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp2006 = 66.7

SPECfp_base2006 = 64.7

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Jan-2014

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz
        2 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 4
    physical 0: cores 0 1 2 3
    physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264615288 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3650M4BD 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 17 17:01
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3650m4bd-lv_home
                ext4   404G   68G  316G  18%  /home
```

```
Additional information from dmidecode:
BIOS IBM -[YOE103BUS-1.10]- 02/14/2014
Memory:
16x Samsung M393B2G70QH0-CMA 16 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp2006 = 66.7

SPECfp_base2006 = 64.7

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp2006 = 66.7

SPECfp_base2006 = 64.7

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp2006 = 66.7

SPECfp_base2006 = 64.7

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -inline-level=0 -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: basepeak = yes
```

```
459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
            -opt-malloc-options=3 -auto -unroll4
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias
```

```
481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp2006 = 66.7

SPECfp_base2006 = 64.7

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Jan-2014

Tested by: IBM Corporation

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Jul 25 01:03:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 July 2014.