



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®_rate2006 = 119

Intel DQ87PG motherboard (Intel Core i5-4570S)

SPECfp_rate_base2006 = 119

CPU2006 license: 13


Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Jul-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

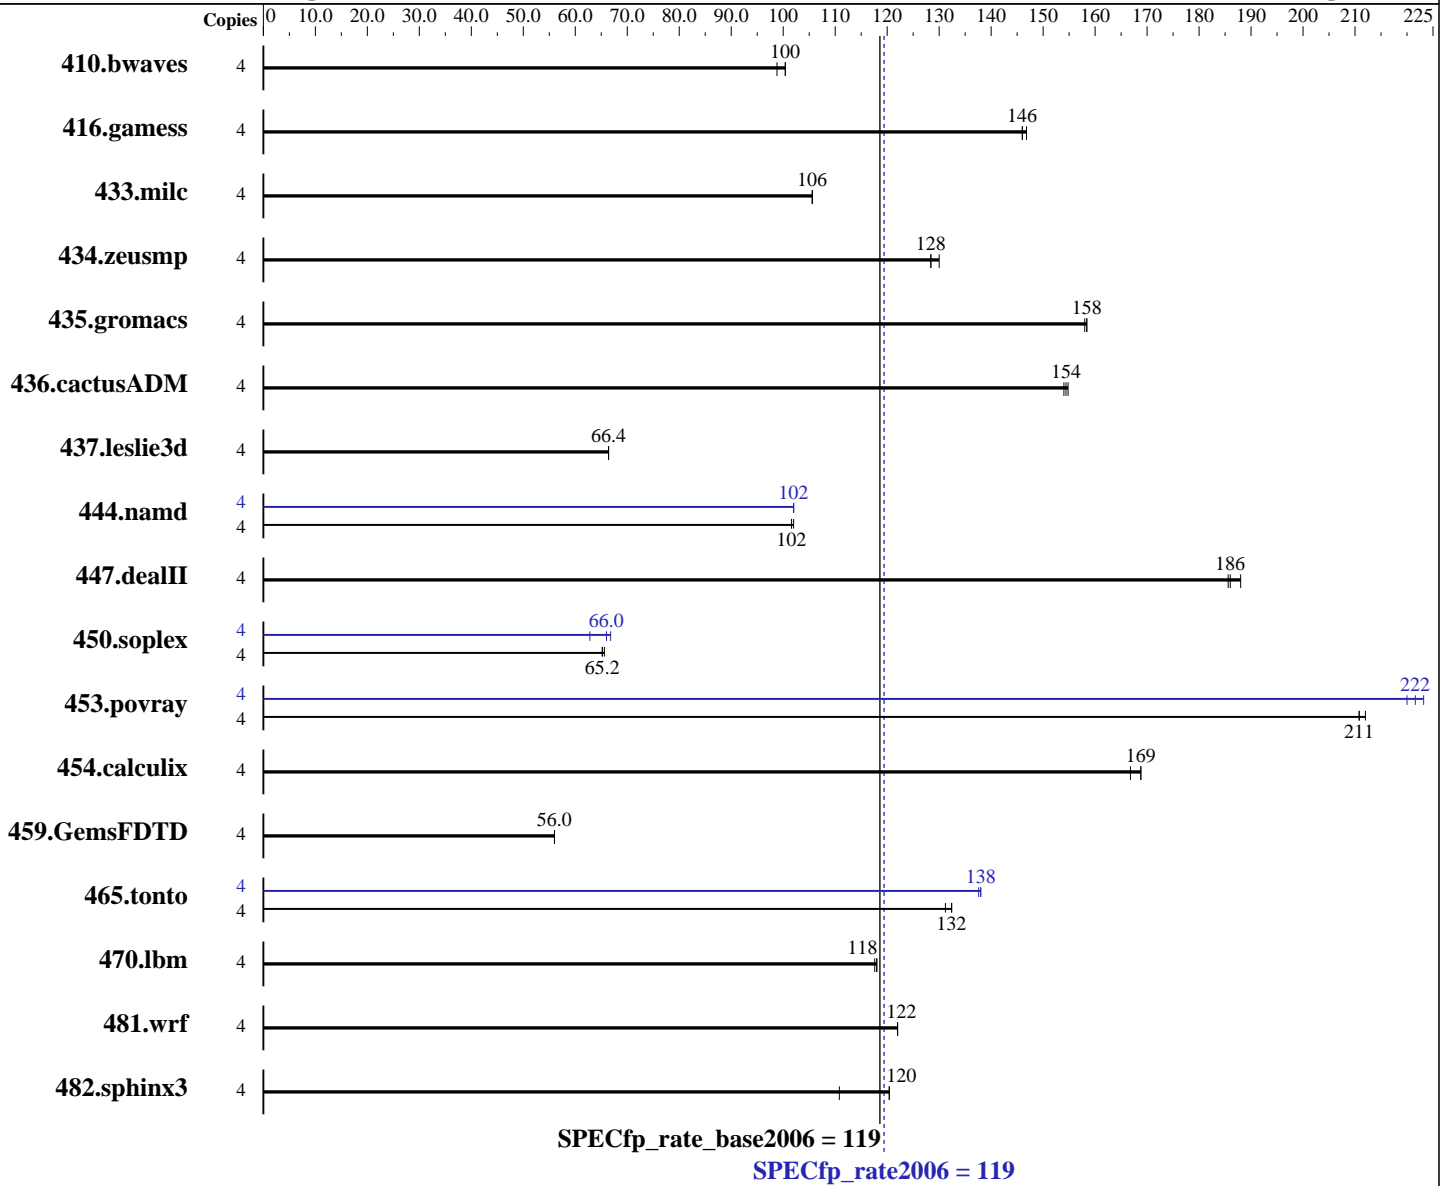

Hardware

CPU Name: Intel Core i5-4570S
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;
 Fortran: Version 13.1.1.171 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 119

Intel DQ87PG motherboard (Intel Core i5-4570S)

SPECfp_rate_base2006 = 119

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Jul-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	542	100	550	98.8	540	100	4	542	100	550	98.8	540	100
416.gamess	4	536	146	534	147	537	146	4	536	146	534	147	537	146
433.milc	4	347	106	347	106	347	106	4	347	106	347	106	347	106
434.zeusmp	4	283	128	280	130	284	128	4	283	128	280	130	284	128
435.gromacs	4	181	158	180	158	180	158	4	181	158	180	158	180	158
436.cactusADM	4	309	154	311	154	309	155	4	309	154	311	154	309	155
437.leslie3d	4	567	66.4	567	66.4	566	66.4	4	567	66.4	567	66.4	566	66.4
444.namd	4	316	102	315	102	315	102	4	315	102	314	102	315	102
447.dealII	4	247	186	246	186	244	188	4	247	186	246	186	244	188
450.soplex	4	510	65.2	508	65.6	513	65.2	4	533	62.8	506	66.0	500	66.8
453.povray	4	101	211	101	211	100	212	4	96.8	220	96.0	222	95.4	223
454.calculix	4	196	169	198	167	195	169	4	196	169	198	167	195	169
459.GemsFDTD	4	761	56.0	759	56.0	760	56.0	4	761	56.0	759	56.0	760	56.0
465.tonto	4	300	131	297	132	297	132	4	286	138	285	138	285	138
470.lbm	4	467	118	467	118	466	118	4	467	118	467	118	466	118
481.wrf	4	366	122	366	122	367	122	4	366	122	366	122	367	122
482.sphinx3	4	705	111	648	120	648	120	4	705	111	648	120	648	120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 64-bit binaries with the command:
 "ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 119

Intel DQ87PG motherboard (Intel Core i5-4570S)

SPECfp_rate_base2006 = 119

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Jul-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

Platform Notes

Sysinfo program C:\SPEC13.1/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt00224D4FB715 Thu Sep 26 23:28:03 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 7 Enterprise
OS Version : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model : DQ87PG__
Processor(s) : 1 Processor(s) Installed.
 [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~2901 Mhz
BIOS Version : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013
Total Physical Memory: 3,749 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0
L2CacheSize : 1024
L3CacheSize : 6144
MaxClockSpeed : 2901
Name : Intel(R) Core(TM) i5-4570S CPU @ 2.90GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

BIOS: SATA mode set to RAID

Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066

Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 119

Intel DQ87PG motherboard (Intel Core i5-4570S)

SPECfp_rate_base2006 = 119

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Jul-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 -Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 119

Intel DQ87PG motherboard (Intel Core i5-4570S)

SPECfp_rate_base2006 = 119

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Jul-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

`-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE`

Peak Compiler Invocation

C benchmarks:

`icl -Qvc10 -Qstd=c99`

C++ benchmarks:

`icl -Qvc10`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`icl -Qvc10 -Qstd=c99 ifort`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: `-QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE`

447.dealII: basepeak = yes

450.soplex: `-QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 119

Intel DQ87PG motherboard (Intel Core i5-4570S)

SPECfp_rate_base2006 = 119

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Jul-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

Peak Optimization Flags (Continued)

```
453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 shlw64M.lib -link /FORCE:MULTIPLE
```

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

```
465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 9 10:56:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.