



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]_rate2006 = 102

Express5800/GT110g-S (Intel Core i3-4350)

SPECfp_rate_base2006 = 99.0

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

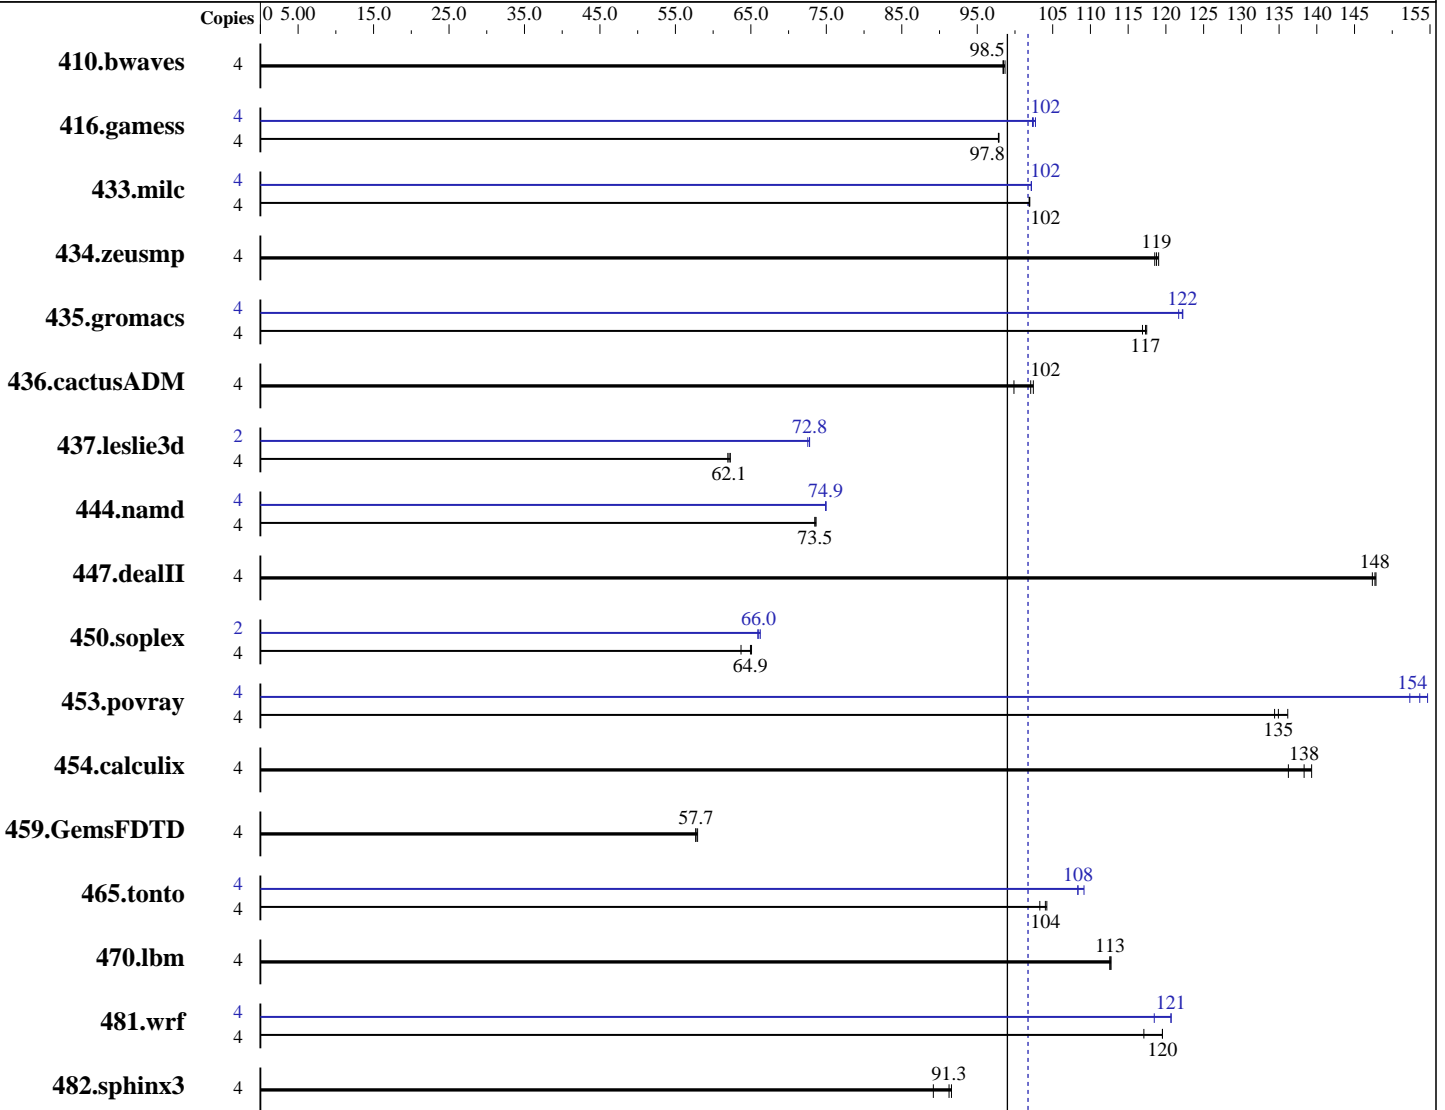

SPECfp_rate_base2006 = 99.0

SPECfp_rate2006 = 102

Hardware

CPU Name: Intel Core i3-4350
 CPU Characteristics:
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Kernel 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.2.144 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 102

Express5800/GT110g-S (Intel Core i3-4350)

SPECfp_rate_base2006 = 99.0

CPU2006 license: 9006

Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	552	98.4	<u>552</u>	<u>98.5</u>	551	98.7	4	552	98.4	<u>552</u>	<u>98.5</u>	551	98.7
416.gamess	4	801	97.8	<u>800</u>	<u>97.8</u>	800	97.9	4	765	102	762	103	<u>765</u>	<u>102</u>
433.milc	4	<u>360</u>	<u>102</u>	360	102	360	102	4	359	102	359	102	<u>359</u>	<u>102</u>
434.zeusmp	4	<u>307</u>	<u>119</u>	306	119	307	119	4	<u>307</u>	<u>119</u>	306	119	307	119
435.gromacs	4	243	117	244	117	<u>243</u>	<u>117</u>	4	234	122	<u>234</u>	<u>122</u>	235	122
436.cactusADM	4	479	99.9	467	102	<u>468</u>	<u>102</u>	4	479	99.9	467	102	<u>468</u>	<u>102</u>
437.leslie3d	4	604	62.3	607	61.9	<u>605</u>	<u>62.1</u>	2	258	72.8	259	72.5	<u>258</u>	<u>72.8</u>
444.namd	4	<u>436</u>	<u>73.5</u>	436	73.6	437	73.5	4	428	75.0	<u>428</u>	<u>74.9</u>	428	74.9
447.dealII	4	<u>310</u>	<u>148</u>	311	147	310	148	4	<u>310</u>	<u>148</u>	311	147	310	148
450.soplex	4	513	65.1	<u>514</u>	<u>64.9</u>	524	63.7	2	252	66.2	<u>253</u>	<u>66.0</u>	253	65.9
453.povray	4	<u>158</u>	<u>135</u>	158	134	156	136	4	<u>139</u>	<u>154</u>	140	152	138	155
454.calculix	4	<u>239</u>	<u>138</u>	237	139	242	136	4	<u>239</u>	<u>138</u>	237	139	242	136
459.GemsFDTD	4	<u>735</u>	<u>57.7</u>	732	57.9	736	57.7	4	<u>735</u>	<u>57.7</u>	732	57.9	736	57.7
465.tonto	4	381	103	378	104	<u>378</u>	<u>104</u>	4	<u>363</u>	<u>108</u>	363	108	361	109
470.lbm	4	488	113	<u>488</u>	<u>113</u>	488	113	4	488	113	<u>488</u>	<u>113</u>	488	113
481.wrf	4	382	117	374	120	<u>374</u>	<u>120</u>	4	370	121	<u>370</u>	<u>121</u>	377	118
482.sphinx3	4	<u>854</u>	<u>91.3</u>	874	89.2	851	91.6	4	<u>854</u>	<u>91.3</u>	874	89.2	851	91.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 102

Express5800/GT110g-S (Intel Core i3-4350)

SPECfp_rate_base2006 = 99.0

CPU2006 license: 9006

Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 102

Express5800/GT110g-S (Intel Core i3-4350)

SPECfp_rate_base2006 = 99.0

CPU2006 license: 9006

Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 102

Express5800/GT110g-S (Intel Core i3-4350)

SPECfp_rate_base2006 = 99.0

CPU2006 license: 9006

Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 102

Express5800/GT110g-S (Intel Core i3-4350)

SPECfp_rate_base2006 = 99.0

CPU2006 license: 9006

Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 26 18:10:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 August 2014.