



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint®\_rate2006 = 900**

Huawei CH121 (Intel Xeon E5-2690 v2)

**SPECint\_rate\_base2006 = 870**

CPU2006 license: 3175


Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

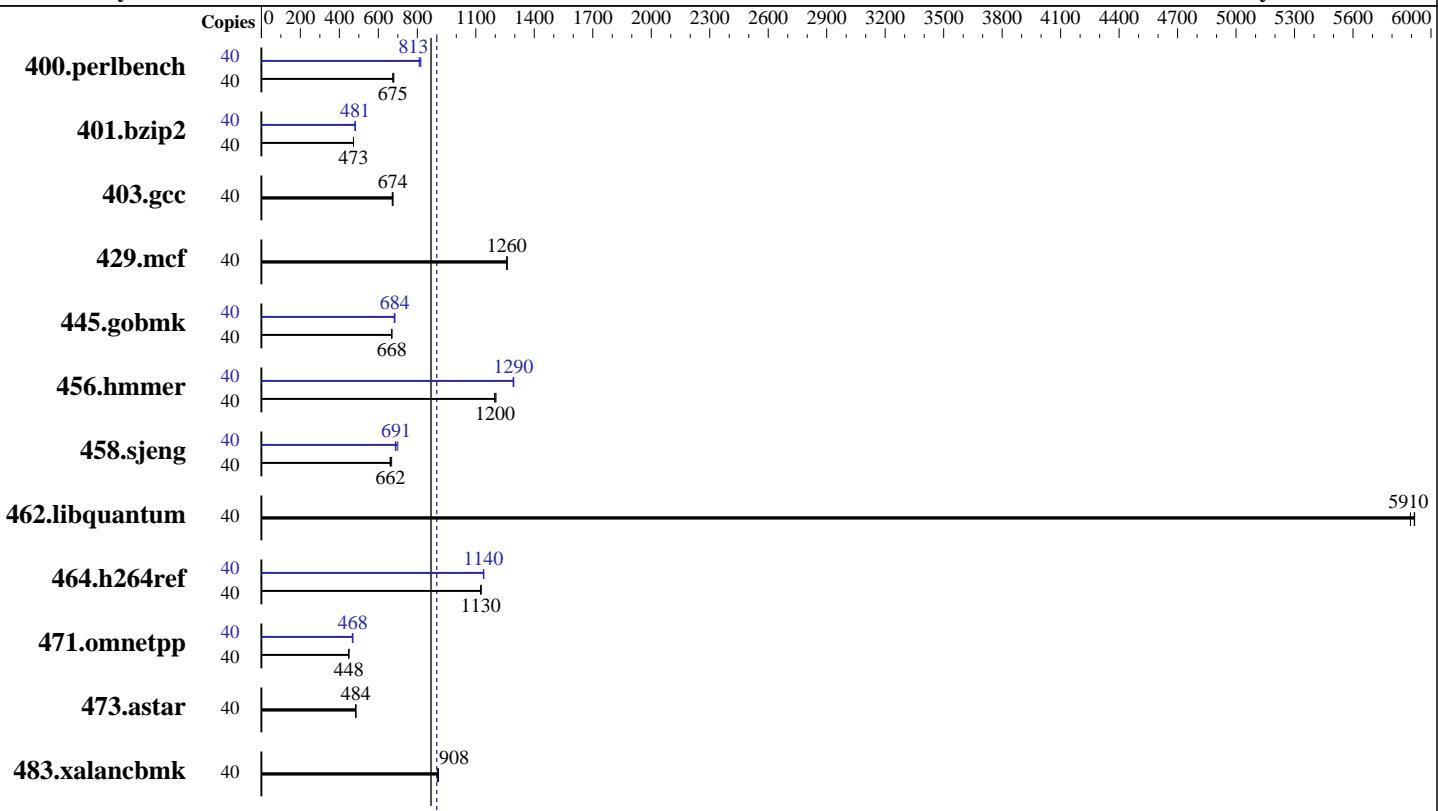

**SPECint\_rate\_base2006 = 870**

**SPECint\_rate2006 = 900**

## Hardware

CPU Name: Intel Xeon E5-2690 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 Compiler: 2.6.32-431.el6.x86\_64  
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 900**

Huawei CH121 (Intel Xeon E5-2690 v2)

**SPECint\_rate\_base2006 = 870**

CPU2006 license: 3175

Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	<b>579</b>	<b>675</b>	575	679	579	675	40	<b>481</b>	<b>813</b>	477	818	483	810
401.bzip2	40	816	473	<b>817</b>	<b>473</b>	817	473	40	<b>803</b>	<b>481</b>	802	482	803	481
403.gcc	40	480	671	<b>478</b>	<b>674</b>	477	675	40	480	671	<b>478</b>	<b>674</b>	477	675
429.mcf	40	290	1260	289	1260	<b>290</b>	<b>1260</b>	40	290	1260	289	1260	<b>290</b>	<b>1260</b>
445.gobmk	40	<b>628</b>	<b>668</b>	626	670	628	668	40	613	685	616	681	<b>614</b>	<b>684</b>
456.hammer	40	<b>311</b>	<b>1200</b>	310	1200	312	1200	40	289	1290	<b>289</b>	<b>1290</b>	288	1290
458.sjeng	40	733	660	<b>731</b>	<b>662</b>	724	668	40	692	700	<b>701</b>	<b>691</b>	704	687
462.libquantum	40	141	5890	140	5920	<b>140</b>	<b>5910</b>	40	141	5890	140	5920	<b>140</b>	<b>5910</b>
464.h264ref	40	<b>786</b>	<b>1130</b>	788	1120	785	1130	40	<b>777</b>	<b>1140</b>	777	1140	776	1140
471.omnetpp	40	558	448	556	449	<b>558</b>	<b>448</b>	40	536	467	533	469	<b>534</b>	<b>468</b>
473.astar	40	580	484	<b>580</b>	<b>484</b>	580	485	40	580	484	<b>580</b>	<b>484</b>	580	485
483.xalancbmk	40	304	908	<b>304</b>	<b>908</b>	306	902	40	304	908	<b>304</b>	<b>908</b>	306	902

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec14/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191

running on localhost Tue Aug 5 16:22:01 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2690 v2 @ 3.00GHz

2 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 900

Huawei CH121 (Intel Xeon E5-2690 v2)

SPECint\_rate\_base2006 = 870

CPU2006 license: 3175

Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

## Platform Notes (Continued)

```
caution.)  
    cpu cores : 10  
    siblings   : 20  
    physical 0: cores 0 1 2 3 4 8 9 10 11 12  
    physical 1: cores 0 1 2 3 4 8 9 10 11 12  
    cache size : 25600 KB  
  
From /proc/meminfo  
MemTotal:      264478184 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
/usr/bin/lsb_release -d  
Red Hat Enterprise Linux Server release 6.5 (Santiago)  
  
From /etc/*release* /etc/*version*  
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server  
  
uname -a:  
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013  
x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Aug 5 16:20  
  
SPEC is set to: /spec14  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda2       ext4  272G   32G  227G  13% /  
  
Additional information from dmidecode:  
BIOS Insyde Corp. RMIBV629 05/12/2014  
Memory:  
4x Hynix HMT42GR7AFR4C-RD 16 GB 1866 MHz 2 rank  
8x NO DIMM NO DIMM  
12x Samsung M393B2G70DB0-CMA 16 GB 1866 MHz 2 rank  
  
(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec14/lib/32:/spec14/lib/64:/spec14/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 (Intel Xeon E5-2690 v2)

**SPECint\_rate2006 = 900**

CPU2006 license: 3175

Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

## General Notes (Continued)

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 900**

Huawei CH121 (Intel Xeon E5-2690 v2)

**SPECint\_rate\_base2006 = 870**

**CPU2006 license:** 3175

**Test date:** Aug-2014

**Test sponsor:** Huawei

**Hardware Availability:** Sep-2013

**Tested by:** Huawei

**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 900

Huawei CH121 (Intel Xeon E5-2690 v2)

SPECint\_rate\_base2006 = 870

CPU2006 license: 3175

Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 26 18:10:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 August 2014.