



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®2006 = 39.7

Huawei CH140 (Intel Xeon E5-2640)

SPECint_base2006 = 37.4

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Feb-2012

Software Availability: Nov-2013

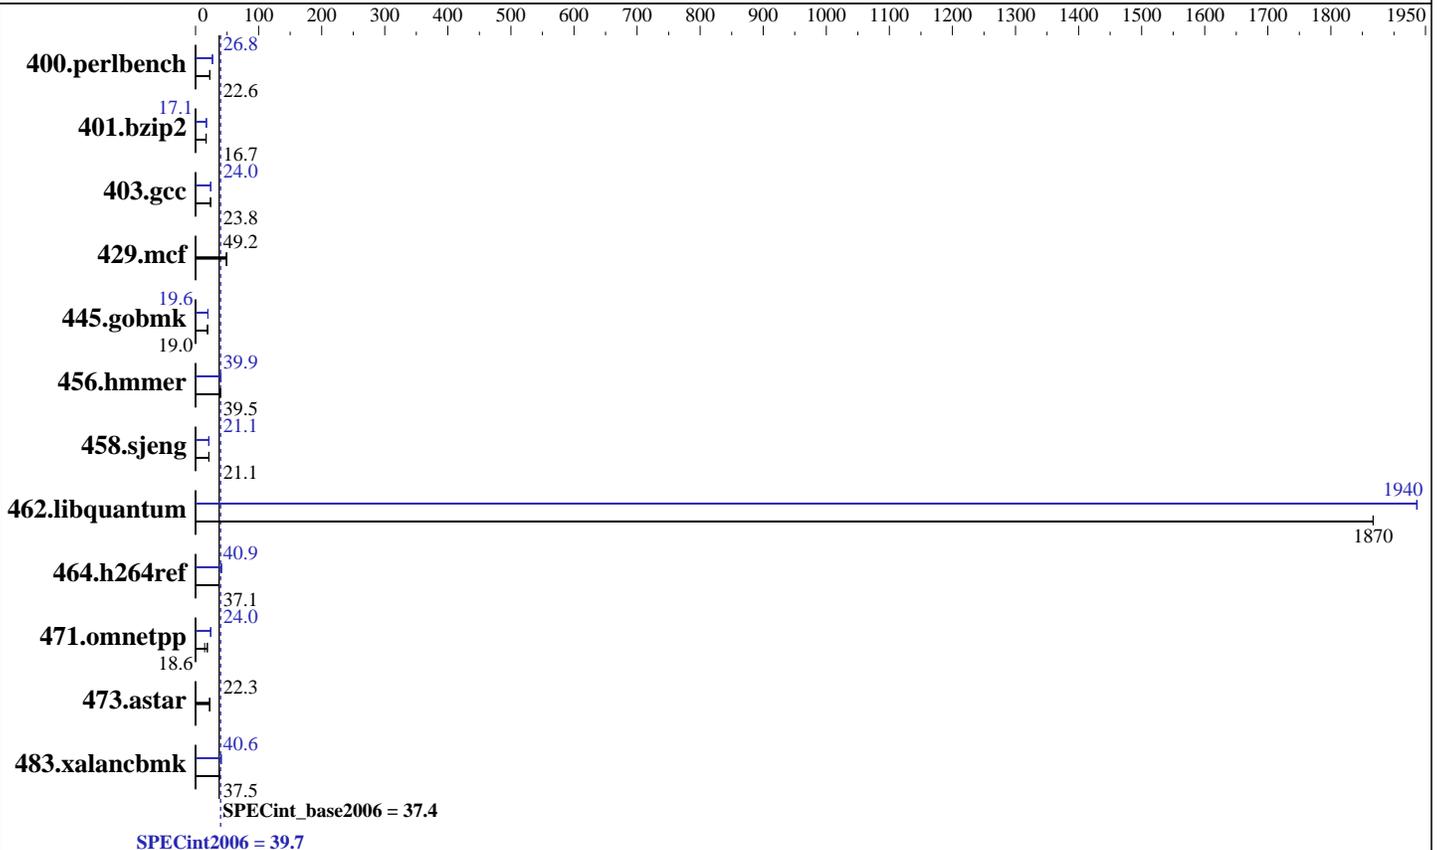

Hardware

CPU Name: Intel Xeon E5-2640
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 X 500 GB SATA 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 39.7

Huawei CH140 (Intel Xeon E5-2640)

SPECint_base2006 = 37.4

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Aug-2014
Hardware Availability: Feb-2012
Software Availability: Nov-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	432	22.6	431	22.7	<u>432</u>	<u>22.6</u>	365	26.8	<u>365</u>	<u>26.8</u>	364	26.8
401.bzip2	576	16.7	578	16.7	<u>578</u>	<u>16.7</u>	564	17.1	<u>563</u>	<u>17.1</u>	563	17.1
403.gcc	337	23.9	338	23.8	<u>338</u>	<u>23.8</u>	336	24.0	<u>335</u>	<u>24.0</u>	335	24.0
429.mcf	185	49.3	187	48.7	<u>185</u>	<u>49.2</u>	185	49.3	187	48.7	<u>185</u>	<u>49.2</u>
445.gobmk	<u>552</u>	<u>19.0</u>	552	19.0	552	19.0	<u>535</u>	<u>19.6</u>	535	19.6	535	19.6
456.hammer	<u>236</u>	<u>39.5</u>	237	39.4	236	39.5	<u>234</u>	<u>39.9</u>	236	39.5	231	40.4
458.sjeng	572	21.1	<u>572</u>	<u>21.1</u>	572	21.2	574	21.1	574	21.1	<u>574</u>	<u>21.1</u>
462.libquantum	11.1	1870	<u>11.1</u>	<u>1870</u>	11.1	1870	<u>10.7</u>	<u>1940</u>	10.7	1940	10.7	1940
464.h264ref	<u>597</u>	<u>37.1</u>	599	36.9	597	37.1	540	41.0	<u>540</u>	<u>40.9</u>	542	40.8
471.omnetpp	333	18.8	<u>337</u>	<u>18.6</u>	432	14.5	<u>260</u>	<u>24.0</u>	259	24.1	261	24.0
473.astar	311	22.5	315	22.3	<u>315</u>	<u>22.3</u>	311	22.5	315	22.3	<u>315</u>	<u>22.3</u>
483.xalancbmk	185	37.3	183	37.6	<u>184</u>	<u>37.5</u>	170	40.7	170	40.6	<u>170</u>	<u>40.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
Sysinfo program /spec/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost Mon Aug 25 09:24:53 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2640 0 @ 2.50GHz
 2 "physical id"s (chips)
12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal: 132105632 kB
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 39.7

Huawei CH140 (Intel Xeon E5-2640)

SPECint_base2006 = 37.4

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Aug-2014
Hardware Availability: Feb-2012
Software Availability: Nov-2013

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 25 09:23
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  455G  117G  315G  28% /
```

Additional information from dmidecode:

```
Memory:
8x Samsung M393B2G70BH0-CMA 16 GB 1866 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "12"
```

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 39.7

Huawei CH140 (Intel Xeon E5-2640)

SPECint_base2006 = 37.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Feb-2012

Software Availability: Nov-2013

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 39.7

Huawei CH140 (Intel Xeon E5-2640)

SPECint_base2006 = 37.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Feb-2012

Software Availability: Nov-2013

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
           -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
         -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
           -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
           -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -unroll4

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
                -auto-p32

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -opt-ra-region-strategy=block -ansi-alias

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECint2006 =	39.7
Huawei CH140 (Intel Xeon E5-2640)	SPECint_base2006 =	37.4

CPU2006 license: 3175	Test date: Aug-2014
Test sponsor: Huawei	Hardware Availability: Feb-2012
Tested by: Huawei	Software Availability: Nov-2013

Peak Optimization Flags (Continued)

471.omnetpp (continued):
 -Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
 -Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
 For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
 Report generated on Wed Sep 24 16:17:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
 Originally published on 24 September 2014.