



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 800**

PowerEdge R630(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate\_base2006 = 777**

CPU2006 license: 55


Test date: Jul-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

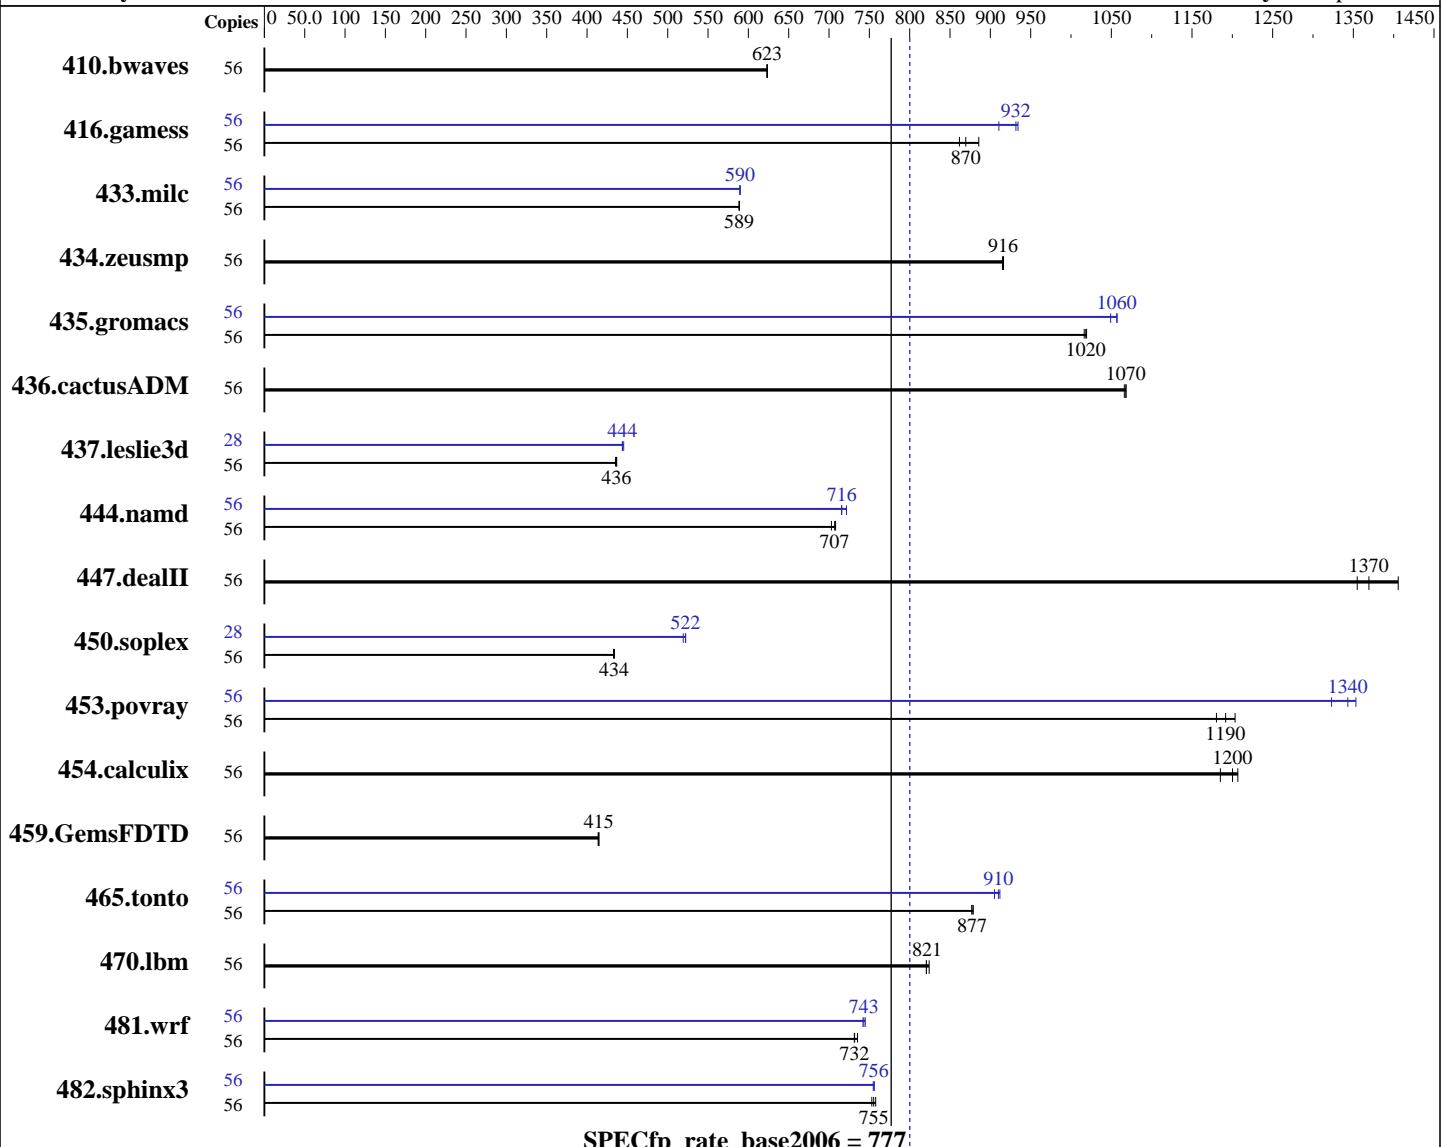

**SPECfp\_rate\_base2006 = 777**

**SPECfp\_rate2006 = 800**

## Hardware

CPU Name: Intel Xeon E5-2695 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
CPU MHz: 2300  
FPU: Integrated  
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
3.0.76-0.11-default  
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE  
for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran  
Studio XE for Linux  
Auto Parallel: No  
File System: ext2  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 800**

PowerEdge R630(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate\_base2006 = 777**

CPU2006 license: 55

Test date: Jul-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 1000 GB 7200 RPM SATA  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1220	624	<u>1221</u>	<u>623</u>	1221	623	56	1220	624	<u>1221</u>	<u>623</u>	1221	623
416.gamess	56	1238	886	<u>1261</u>	<u>870</u>	1272	862	56	1174	934	1204	911	<u>1177</u>	<u>932</u>
433.milc	56	873	589	873	589	<u>873</u>	<u>589</u>	56	<u>872</u>	<u>590</u>	872	590	872	590
434.zeusmp	56	556	916	<u>556</u>	<u>916</u>	557	915	56	556	916	<u>556</u>	<u>916</u>	557	915
435.gromacs	56	393	1020	392	1020	<u>393</u>	<u>1020</u>	56	381	1050	378	1060	<u>378</u>	<u>1060</u>
436.cactusADM	56	628	1070	<u>627</u>	<u>1070</u>	626	1070	56	628	1070	<u>627</u>	<u>1070</u>	626	1070
437.leslie3d	56	<u>1206</u>	<u>436</u>	1209	435	1205	437	28	591	445	593	444	<u>593</u>	<u>444</u>
444.namd	56	<u>635</u>	<u>707</u>	639	703	634	708	56	622	722	628	716	<u>627</u>	<u>716</u>
447.dealII	56	456	1410	473	1350	<u>468</u>	<u>1370</u>	56	456	1410	473	1350	<u>468</u>	<u>1370</u>
450.soplex	56	1079	433	<u>1077</u>	<u>434</u>	1076	434	28	447	522	<u>447</u>	<u>522</u>	450	519
453.povray	56	252	1180	248	1200	<u>250</u>	<u>1190</u>	56	225	1320	220	1350	<u>222</u>	<u>1340</u>
454.calculix	56	383	1210	390	1190	<u>385</u>	<u>1200</u>	56	383	1210	390	1190	<u>385</u>	<u>1200</u>
459.GemsFDTD	56	<u>1433</u>	<u>415</u>	1436	414	1433	415	56	<u>1433</u>	<u>415</u>	1436	414	1433	415
465.tonto	56	<u>628</u>	<u>877</u>	627	879	628	877	56	<u>606</u>	<u>910</u>	604	912	609	905
470.lbm	56	<u>937</u>	<u>821</u>	938	821	934	824	56	<u>937</u>	<u>821</u>	938	821	934	824
481.wrf	56	<u>855</u>	<u>732</u>	855	731	851	735	56	843	742	<u>842</u>	<u>743</u>	840	745
482.sphinx3	56	<u>1445</u>	<u>755</u>	1440	758	1449	753	56	<u>1444</u>	<u>756</u>	1446	755	1444	756

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die

Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 800**

PowerEdge R630(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate\_base2006 = 777**

**CPU2006 license:** 55

**Test date:** Jul-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2014

## Platform Notes (Continued)

```
Execute Disable disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Sat Jul  5 03:09:44 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2695 v3 @ 2.30GHz
        2 "physical id"s (chips)
        56 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 14
        siblings : 28
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    cache size : 17920 KB
```

```
From /proc/meminfo
    MemTotal:       264440604 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
    VERSION = 11
    PATCHLEVEL = 3
```

```
uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 4 14:23 last=S
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  726G   10G  715G   2%  /
```

Additional information from dmidecode:

BIOS Dell Inc. 0.3.25 06/19/2014

Memory:

16x 002C00B3002C 36ASF2G72PZ-2G1A1 16 GB 2133 MHz

8x Not Specified Not Specified

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate2006 = 800**

**SPECfp\_rate\_base2006 = 777**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate2006 = 800**

**SPECfp\_rate\_base2006 = 777**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate2006 = 800**

**SPECfp\_rate\_base2006 = 777**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Portability Flags (Continued)

```
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
  -auto-ilp32
```

470.lbm: basepeak = yes

```
482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
  -unroll2
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
  -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
  -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
  -ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate2006 = 800**

**SPECfp\_rate\_base2006 = 777**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate2006 = 800**

**SPECfp\_rate\_base2006 = 777**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 24 16:20:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 September 2014.