



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 893

Huawei RH2288 V3 (Intel Xeon E5-2698 v3)

SPECfp_rate_base2006 = 868

CPU2006 license: 3175


Test date: Aug-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

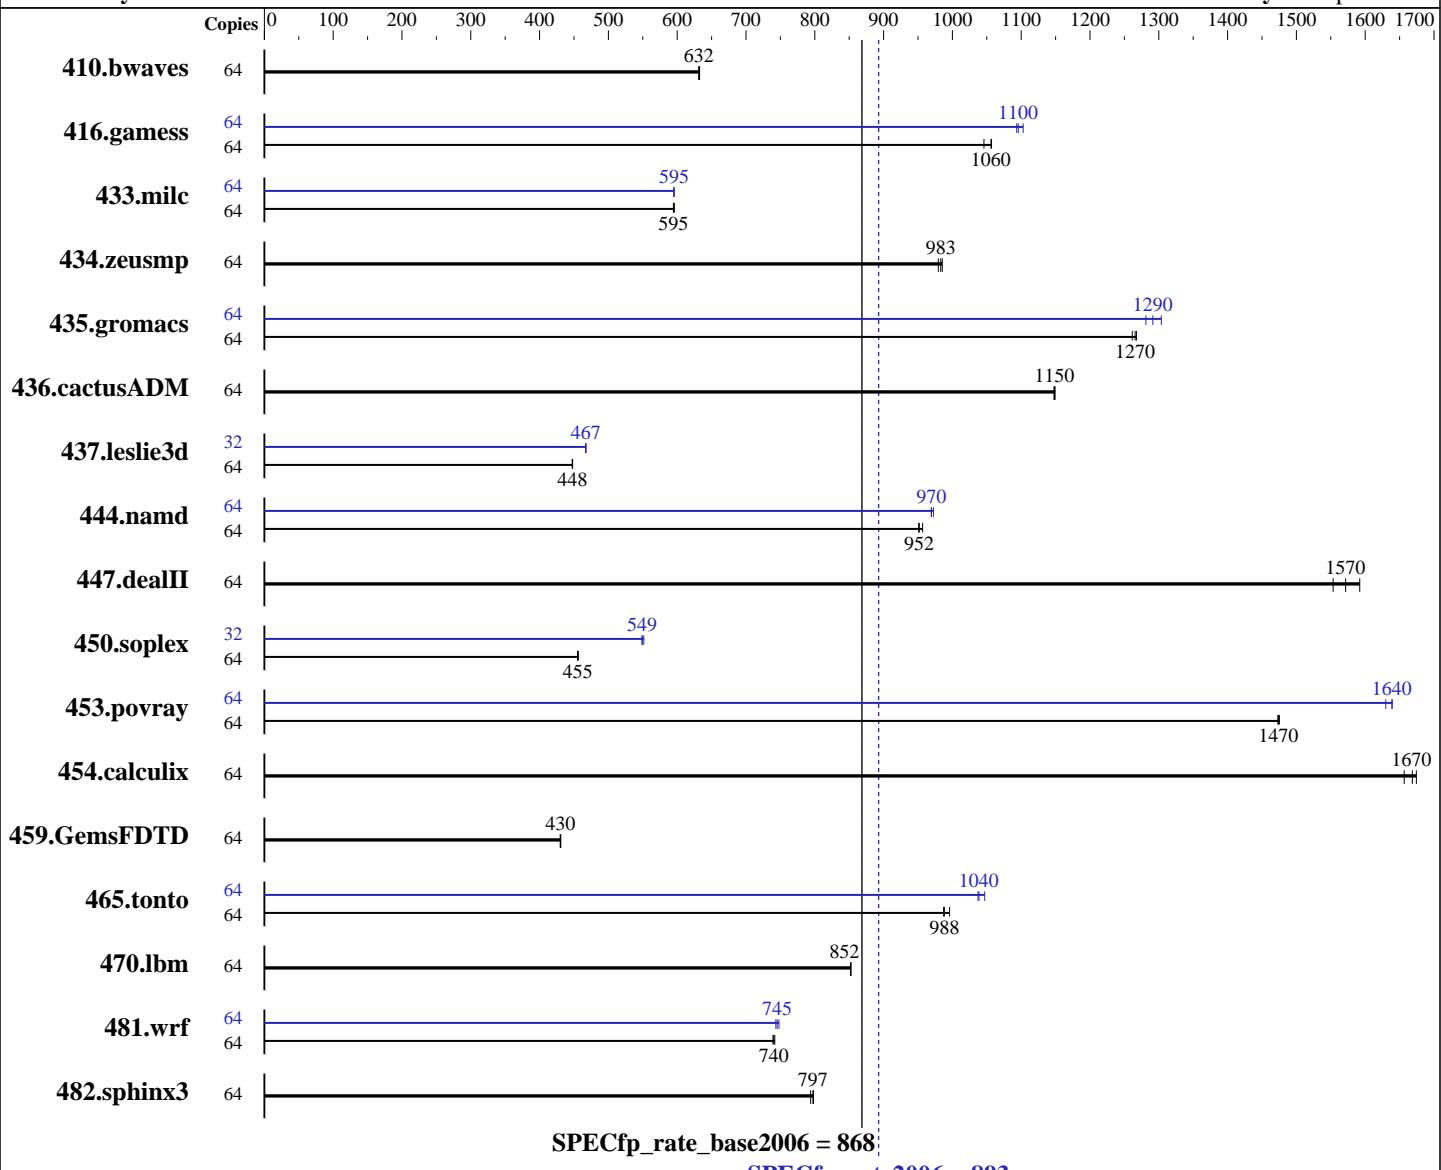

Hardware

CPU Name: Intel Xeon E5-2698 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 2300
FPU: Integrated
CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
Compiler: 3.10.0-123.el7.x86_64
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 893

Huawei RH2288 V3 (Intel Xeon E5-2698 v3)

SPECfp_rate_base2006 = 868

CPU2006 license: 3175

Test date: Aug-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

L3 Cache: 40 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1375	633	1378	631	<u>1377</u>	<u>632</u>	64	1375	633	1378	631	<u>1377</u>	<u>632</u>
416.gamess	64	<u>1187</u>	<u>1060</u>	1186	1060	1198	1050	64	1146	1090	1136	1100	<u>1144</u>	<u>1100</u>
433.milc	64	<u>988</u>	<u>595</u>	986	596	988	595	64	987	596	987	595	<u>987</u>	<u>595</u>
434.zeusmp	64	591	985	<u>592</u>	<u>983</u>	595	980	64	591	985	<u>592</u>	<u>983</u>	595	980
435.gromacs	64	362	1260	361	1270	<u>361</u>	<u>1270</u>	64	357	1280	<u>354</u>	<u>1290</u>	351	1300
436.cactusADM	64	666	1150	665	1150	<u>666</u>	<u>1150</u>	64	666	1150	665	1150	<u>666</u>	<u>1150</u>
437.leslie3d	64	<u>1343</u>	<u>448</u>	1343	448	1345	447	32	<u>644</u>	<u>467</u>	644	467	643	467
444.namd	64	536	957	540	951	<u>539</u>	<u>952</u>	64	528	972	<u>529</u>	<u>970</u>	530	969
447.dealII	64	460	1590	471	1550	<u>466</u>	<u>1570</u>	64	460	1590	471	1550	<u>466</u>	<u>1570</u>
450.soplex	64	1172	455	1170	456	<u>1172</u>	<u>455</u>	32	484	552	486	549	<u>486</u>	<u>549</u>
453.povray	64	231	1470	<u>231</u>	<u>1470</u>	231	1480	64	209	1630	<u>208</u>	<u>1640</u>	208	1640
454.calculix	64	<u>316</u>	<u>1670</u>	315	1670	319	1660	64	<u>316</u>	<u>1670</u>	315	1670	319	1660
459.GemsFDTD	64	1576	431	1579	430	<u>1578</u>	<u>430</u>	64	1576	431	1579	430	<u>1578</u>	<u>430</u>
465.tonto	64	632	996	638	987	<u>637</u>	<u>988</u>	64	601	1050	<u>606</u>	<u>1040</u>	607	1040
470.lbm	64	1032	852	<u>1032</u>	<u>852</u>	1032	852	64	1032	852	<u>1032</u>	<u>852</u>	1032	852
481.wrf	64	967	739	<u>966</u>	<u>740</u>	964	742	64	962	743	<u>959</u>	<u>745</u>	956	748
482.sphinx3	64	<u>1564</u>	<u>797</u>	1571	794	1563	798	64	<u>1564</u>	<u>797</u>	1571	794	1563	798

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Set Power Efficiency Mode to Custom
 Set Snoop Mode to COD

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 893

Huawei RH2288 V3 (Intel Xeon E5-2698 v3)

SPECfp_rate_base2006 = 868

CPU2006 license: 3175

Test date: Aug-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Platform Notes (Continued)

Set Patrol Scrub to Disable

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec15/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Wed Aug 5 03:17:27 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2698 v3 @ 2.30GHz
        2 "physical id"s (chips)
        64 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 8
        siblings : 16
        physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
        physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    cache size : 20480 KB
```

```
From /proc/meminfo
    MemTotal:       263573300 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
    Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
    EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 4 15:15

SPEC is set to: /spec15
 Filesystem Type Size Used Avail Use% Mounted on
 /dev/sda2 ext4 448G 177G 249G 42% /
Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V3 (Intel Xeon E5-2698 v3)

SPECfp_rate2006 = 893

SPECfp_rate_base2006 = 868

CPU2006 license: 3175

Test date: Aug-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 1.26 12/22/2014

Memory:

8x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz
8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
`LD_LIBRARY_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"`

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

`echo always > /sys/kernel/mm/transparent_hugepage/enabled`

Filesystem page cache cleared with:

`echo 1> /proc/sys/vm/drop_caches`

runspec command invoked through numactl i.e.:

`numactl --interleave=all runspec <etc>`

Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`

416.gamess: `-DSPEC_CPU_LP64`

433.milc: `-DSPEC_CPU_LP64`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V3 (Intel Xeon E5-2698 v3)

SPECfp_rate2006 = 893

SPECfp_rate_base2006 = 868

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V3 (Intel Xeon E5-2698 v3)

SPECfp_rate2006 = 893

SPECfp_rate_base2006 = 868

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V3 (Intel Xeon E5-2698 v3)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp_rate2006 = 893

SPECfp_rate_base2006 = 868

Test date: Aug-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

450.soplex (continued):

-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V3 (Intel Xeon E5-2698 v3)

SPECfp_rate2006 = 893

SPECfp_rate_base2006 = 868

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 25 17:53:21 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 August 2015.