



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp[®]2006 = **97.3**

Lenovo System x3500 M5
(Intel Xeon E5-2630L v3, 1.80 GHz)

SPECfp_base2006 = **91.6**

CPU2006 license: 9017


Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

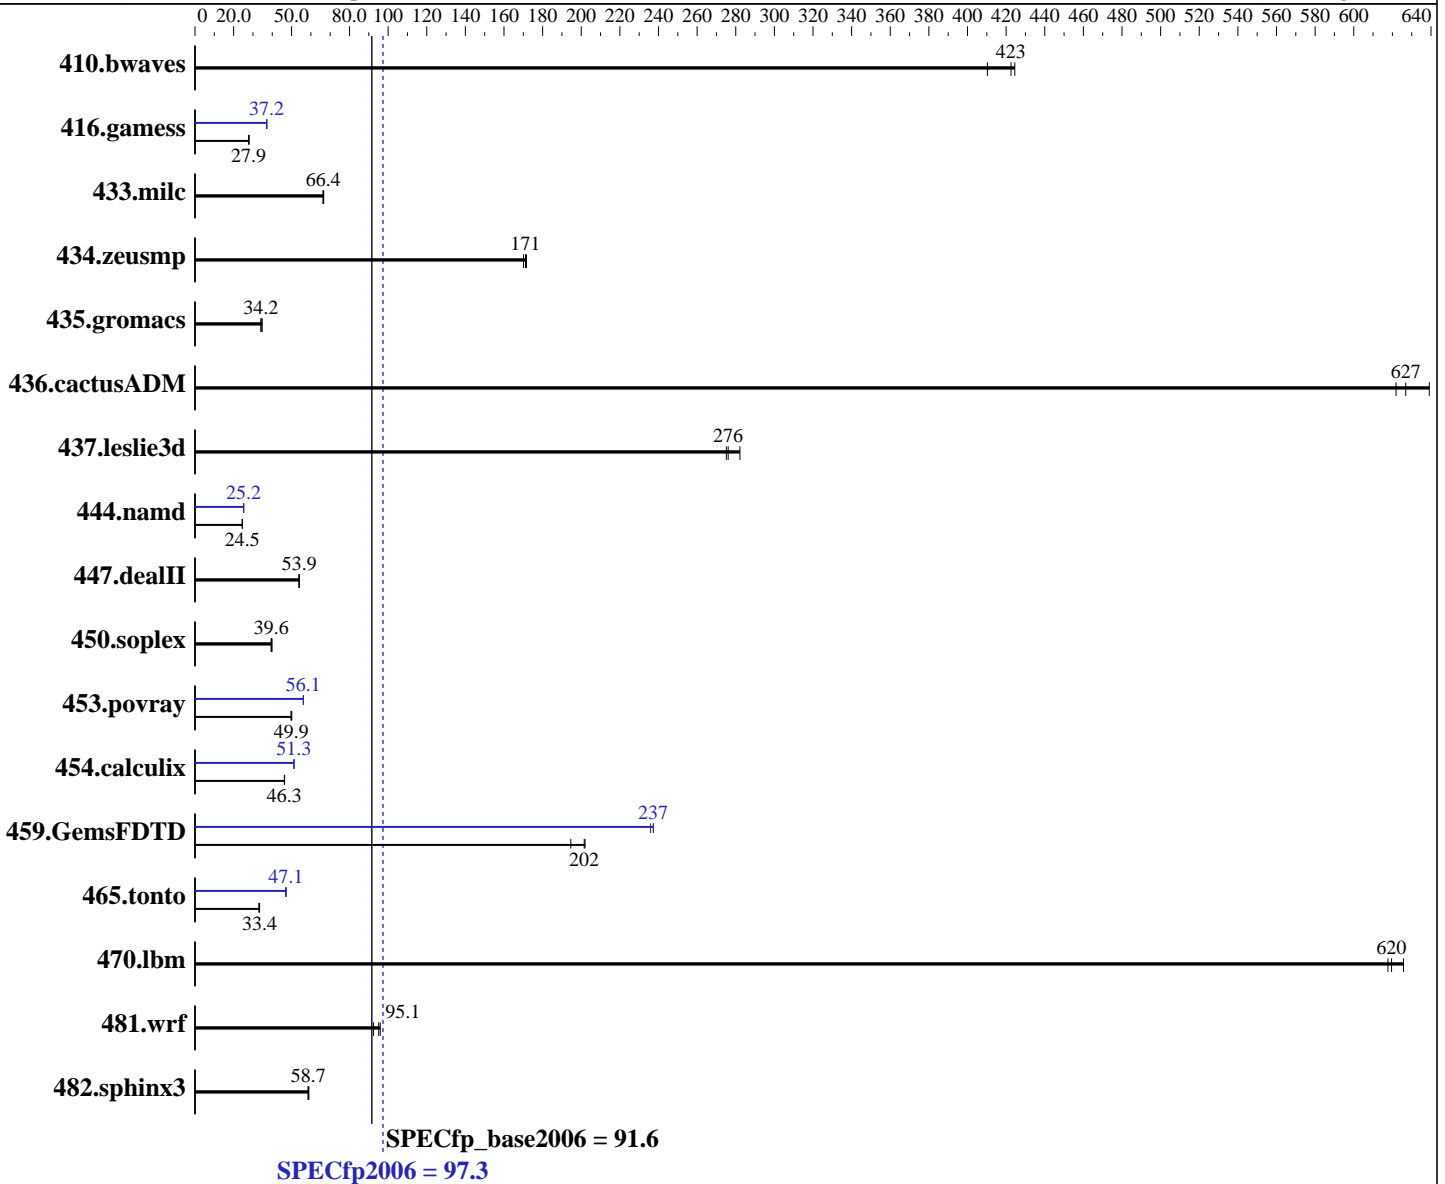

Hardware

CPU Name: Intel Xeon E5-2630L v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **97.3**

Lenovo System x3500 M5
(Intel Xeon E5-2630L v3, 1.80 GHz)

SPECfp_base2006 = **91.6**

CPU2006 license: 9017

Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem: 1 x 960 GB SATA SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	33.1	410	32.2	423	32.0	424	33.1	410	32.2	423	32.0	424
416.gamess	700	28.0	703	27.8	703	27.9	527	37.2	528	37.1	526	37.2
433.milc	138	66.3	138	66.6	138	66.4	138	66.3	138	66.6	138	66.4
434.zeusmp	53.0	172	53.2	171	53.5	170	53.0	172	53.2	171	53.5	170
435.gromacs	209	34.2	209	34.2	205	34.8	209	34.2	209	34.2	205	34.8
436.cactusADM	19.2	622	18.7	639	19.1	627	19.2	622	18.7	639	19.1	627
437.leslie3d	34.0	276	33.3	282	34.2	275	34.0	276	33.3	282	34.2	275
444.namd	327	24.5	327	24.5	327	24.5	319	25.2	318	25.3	318	25.2
447.dealII	212	53.9	212	53.9	212	53.9	212	53.9	212	53.9	212	53.9
450.soplex	211	39.6	209	39.9	212	39.4	211	39.6	209	39.9	212	39.4
453.povray	107	49.9	106	50.1	107	49.7	94.9	56.1	94.8	56.1	94.7	56.2
454.calculix	178	46.4	178	46.3	178	46.3	161	51.3	161	51.3	161	51.2
459.GemsFDTD	54.5	195	52.5	202	52.6	202	44.7	237	45.0	236	44.7	237
465.tonto	294	33.4	298	33.0	294	33.4	209	47.1	210	47.0	209	47.1
470.lbm	22.0	626	22.2	620	22.2	618	22.0	626	22.2	620	22.2	618
481.wrf	117	95.1	116	95.9	121	92.5	117	95.1	116	95.9	121	92.5
482.sphinx3	333	58.6	330	59.0	332	58.7	333	58.6	330	59.0	332	58.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS setting:
Operating Mode set to "Maximum Performance"
Hyper-threading set to "Enable"
Snoop mode set to "Home Snoop"
Sysinfo program /home/SPEC_ic16/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on x3500M5 Thu Dec 3 11:17:44 2015

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 97.3

Lenovo System x3500 M5
(Intel Xeon E5-2630L v3, 1.80 GHz)

SPECfp_base2006 = 91.6

CPU2006 license: 9017

Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2630L v3 @ 1.80GHz
  2 "physical id"s (chips)
  32 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 8
    siblings  : 16
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
  cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      263455828 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

```

uname -a:
Linux x3500M5 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64
x86_64 x86_64 GNU/Linux

```

```

SPEC is set to: /home/SPEC_ic16
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs  927G 149G  779G  17% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[TAE105J-1.10]- 04/20/2015

Memory:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 97.3

Lenovo System x3500 M5
(Intel Xeon E5-2630L v3, 1.80 GHz)

SPECfp_base2006 = 91.6

CPU2006 license: 9017

Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Platform Notes (Continued)

6x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1866 MHz
10x Hynix HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz, configured at 1866 MHz
8x NO DIMM Unknown

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/SPEC_ic16/libs/32:/home/SPEC_ic16/libs/64:/home/SPEC_ic16/sh"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 97.3

Lenovo System x3500 M5
(Intel Xeon E5-2630L v3, 1.80 GHz)

SPECfp_base2006 = 91.6

CPU2006 license: 9017

Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 97.3

Lenovo System x3500 M5
(Intel Xeon E5-2630L v3, 1.80 GHz)

SPECfp_base2006 = 91.6

CPU2006 license: 9017

Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 97.3

Lenovo System x3500 M5
(Intel Xeon E5-2630L v3, 1.80 GHz)

SPECfp_base2006 = 91.6

CPU2006 license: 9017

Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 30 19:57:36 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 December 2015.