



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.00 GHz, Intel Xeon Gold 6138)

SPECfp<sup>®</sup>\_rate2006 = 1380

SPECfp\_rate\_base2006 = 1350

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

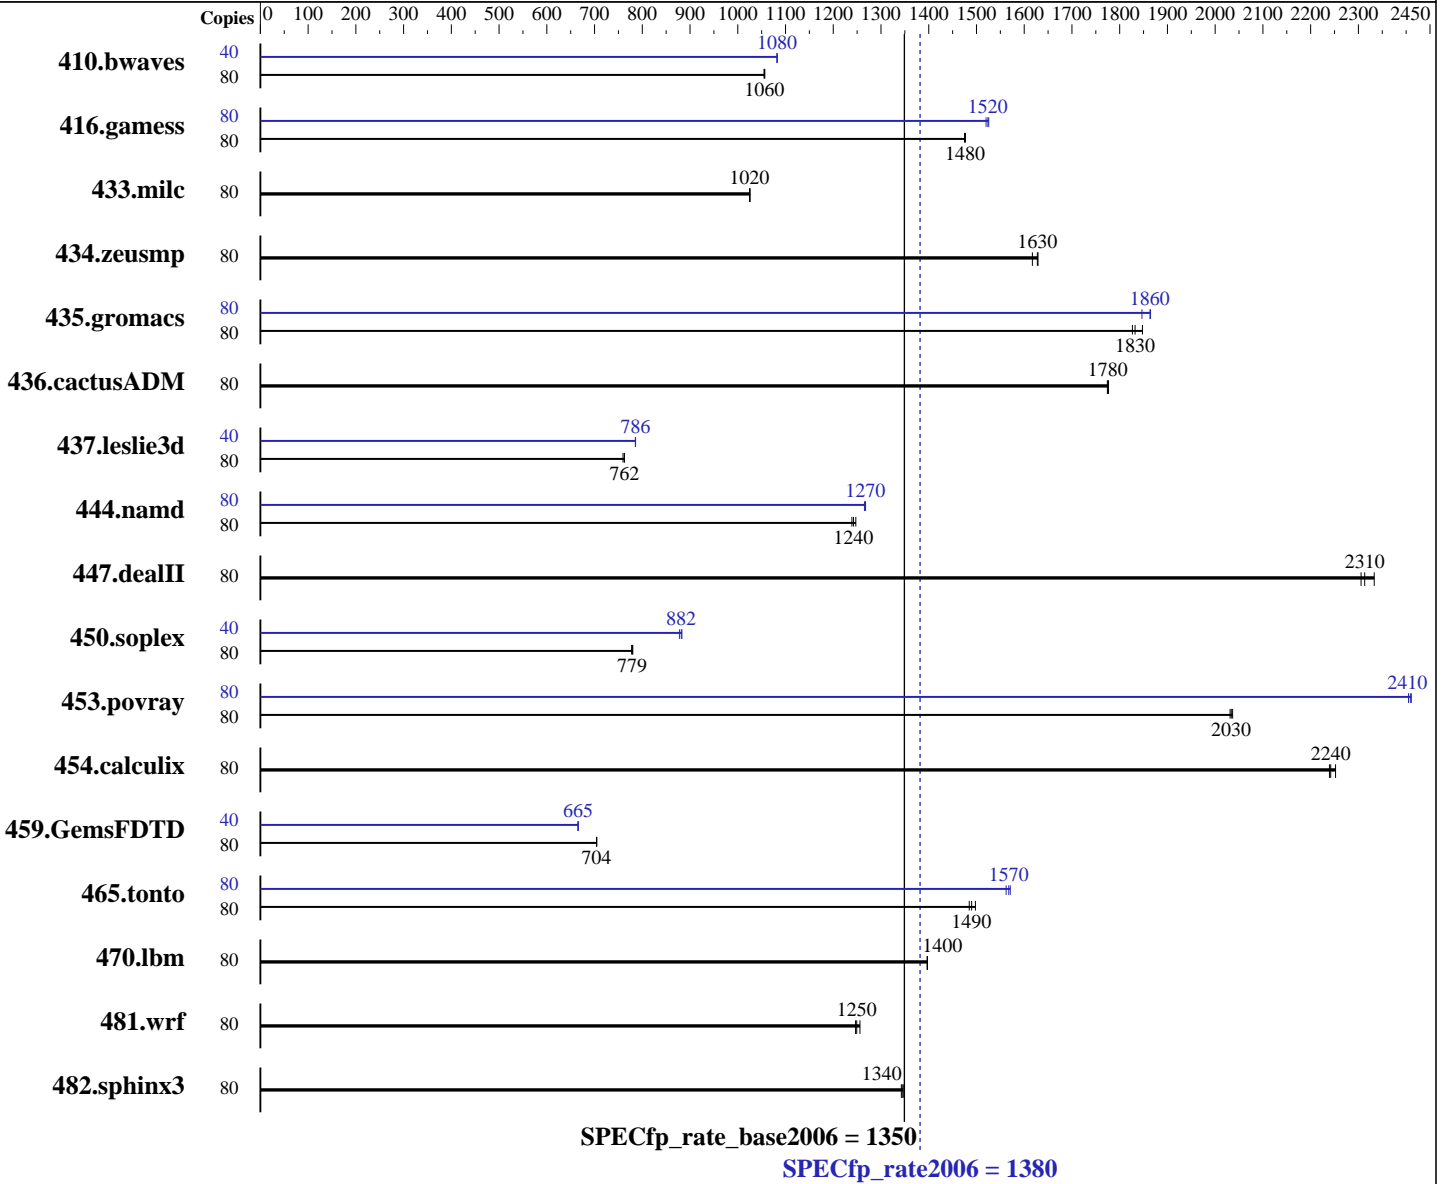

### Hardware

CPU Name: Intel Xeon Gold 6138  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: btrfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.00 GHz, Intel Xeon Gold 6138)

SPECfp\_rate2006 = 1380

SPECfp\_rate\_base2006 = 1350

CPU2006 license: 9017

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

L3 Cache: 27.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	<b>1029</b>	<b>1060</b>	1029	1060	1031	1050	40	<b>502</b>	<b>1080</b>	502	1080	502	1080
416.gamess	80	<b>1061</b>	<b>1480</b>	1062	1480	1061	1480	80	1030	1520	<b>1028</b>	<b>1520</b>	1027	1530
433.milc	80	<b>717</b>	<b>1020</b>	716	1030	717	1020	80	<b>717</b>	<b>1020</b>	716	1030	717	1020
434.zeusmp	80	450	1620	447	1630	<b>447</b>	<b>1630</b>	80	450	1620	447	1630	<b>447</b>	<b>1630</b>
435.gromacs	80	<b>312</b>	<b>1830</b>	313	1830	309	1850	80	309	1850	306	1860	<b>307</b>	<b>1860</b>
436.cactusADM	80	538	1780	<b>538</b>	<b>1780</b>	539	1770	80	538	1780	<b>538</b>	<b>1780</b>	539	1770
437.leslie3d	80	990	760	986	763	<b>986</b>	<b>762</b>	40	<b>479</b>	<b>786</b>	478	786	479	786
444.namd	80	<b>516</b>	<b>1240</b>	518	1240	514	1250	80	<b>506</b>	<b>1270</b>	507	1270	506	1270
447.dealII	80	392	2330	397	2310	<b>396</b>	<b>2310</b>	80	392	2330	397	2310	<b>396</b>	<b>2310</b>
450.soplex	80	855	780	858	778	<b>856</b>	<b>779</b>	40	378	883	<b>378</b>	<b>882</b>	380	878
453.povray	80	209	2040	<b>209</b>	<b>2030</b>	210	2030	80	177	2400	<b>177</b>	<b>2410</b>	177	2410
454.calculix	80	293	2250	295	2240	<b>294</b>	<b>2240</b>	80	293	2250	295	2240	<b>294</b>	<b>2240</b>
459.GemsFDTD	80	1205	704	1205	704	<b>1205</b>	<b>704</b>	40	<b>638</b>	<b>665</b>	637	666	638	665
465.tonto	80	526	1500	<b>528</b>	<b>1490</b>	530	1480	80	501	1570	504	1560	<b>502</b>	<b>1570</b>
470.lbm	80	<b>787</b>	<b>1400</b>	787	1400	787	1400	80	<b>787</b>	<b>1400</b>	787	1400	787	1400
481.wrf	80	712	1260	717	1250	<b>715</b>	<b>1250</b>	80	712	1260	717	1250	<b>715</b>	<b>1250</b>
482.sphinx3	80	1158	1350	1161	1340	<b>1160</b>	<b>1340</b>	80	1158	1350	1161	1340	<b>1160</b>	<b>1340</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Operating Mode set to Maximum Performance  
SNC set to Enable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECfp\_rate2006 = 1380

ThinkSystem SR530  
(2.00 GHz, Intel Xeon Gold 6138)

SPECfp\_rate\_base2006 = 1350

CPU2006 license: 9017

Test date: Jun-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

### Platform Notes (Continued)

DCU Streamer Prefetcher set to Disable

XPT Prefetcher set to Disable

LLC dead line alloc set to Disable

Stale AtoS set to Enable

Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-ickx Thu Jun 8 22:26:01 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

cache size : 28160 KB

From /proc/meminfo

MemTotal: 395881228 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 2

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION\_ID="12.2"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux linux-ickx 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jun 8 22:19

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

**SPECfp\_rate2006 = 1380**

ThinkSystem SR530  
(2.00 GHz, Intel Xeon Gold 6138)

**SPECfp\_rate\_base2006 = 1350**

**CPU2006 license:** 9017

**Test date:** Jun-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```

SPEC is set to: /home/cpu2006-1.2-ic17.0u3
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        btrfs    744G  170G  573G  23% /home
Additional information from dmidecode:

```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS Lenovo -[TEE105Z-1.00]- 04/27/2017
Memory:
  12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 1380

ThinkSystem SR530  
(2.00 GHz, Intel Xeon Gold 6138)

SPECfp\_rate\_base2006 = 1350

CPU2006 license: 9017

Test date: Jun-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 1380

ThinkSystem SR530  
(2.00 GHz, Intel Xeon Gold 6138)

SPECfp\_rate\_base2006 = 1350

CPU2006 license: 9017

Test date: Jun-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -fno-alias -auto-ilp32  
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 1380

ThinkSystem SR530  
(2.00 GHz, Intel Xeon Gold 6138)

SPECfp\_rate\_base2006 = 1350

CPU2006 license: 9017

Test date: Jun-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.00 GHz, Intel Xeon Gold 6138)

SPECfp\_rate2006 = 1380

SPECfp\_rate\_base2006 = 1350

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Jun-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 13 12:50:45 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 July 2017.