



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.60 GHz, Intel Xeon Gold 6126T)

SPECfp®_rate2006 = 1140

SPECfp_rate_base2006 = 1120

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

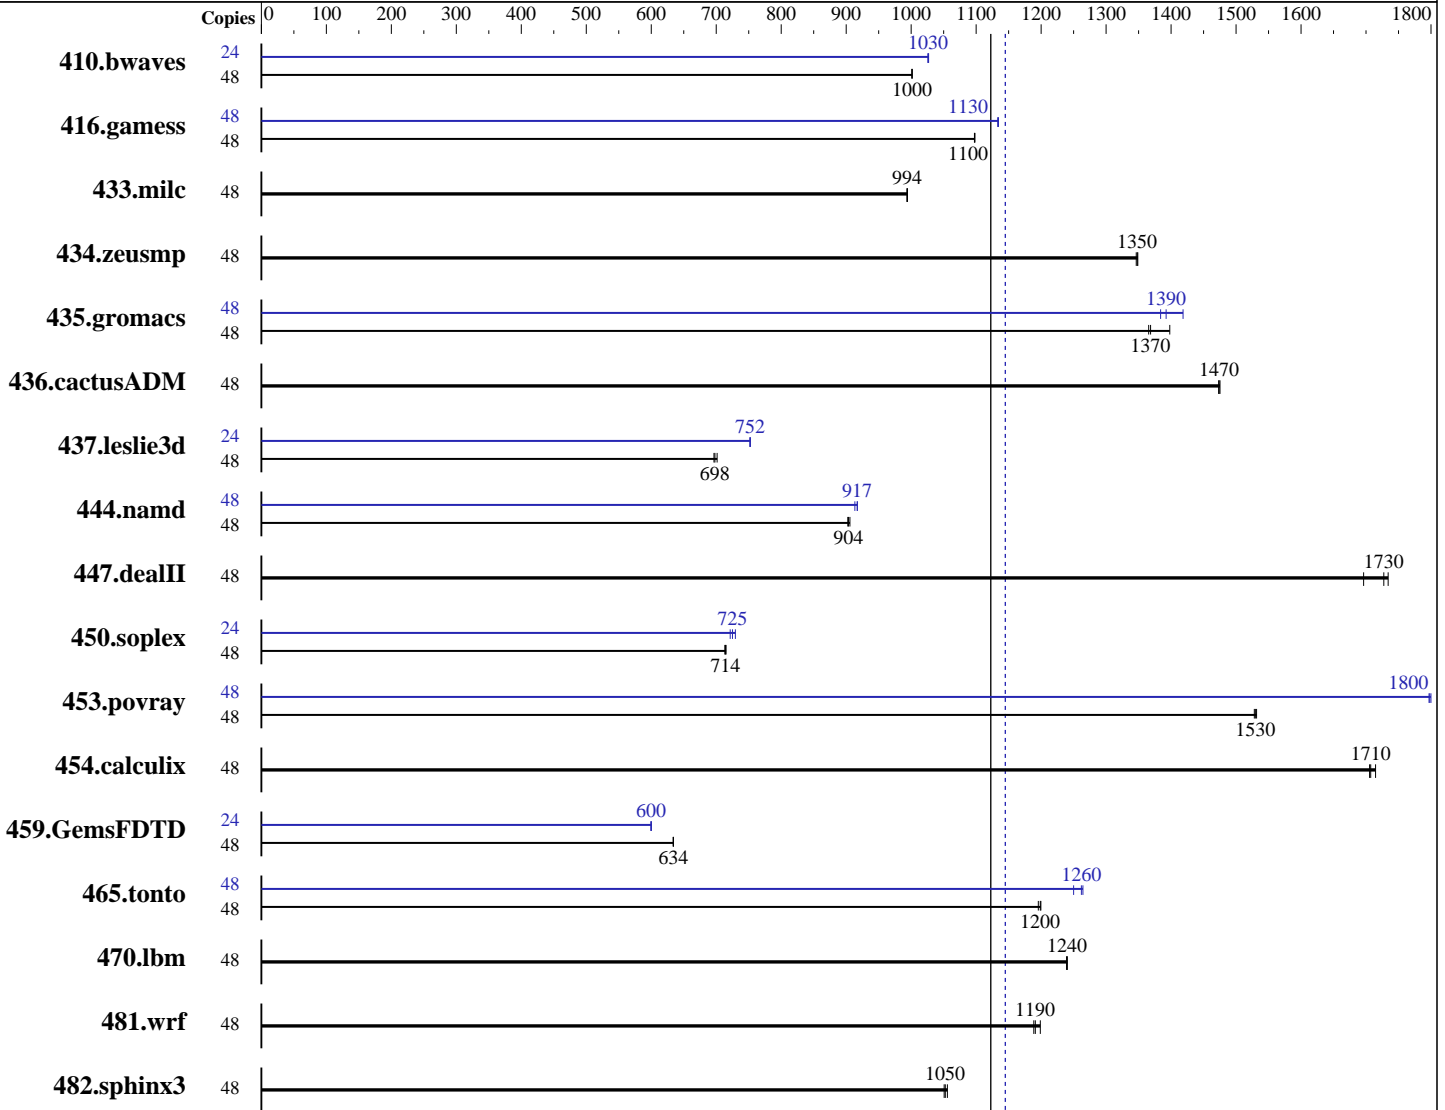

SPECfp_rate_base2006 = 1120

SPECfp_rate2006 = 1140

Hardware

CPU Name: Intel Xeon Gold 6126T
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1140

ThinkSystem SR650
(2.60 GHz, Intel Xeon Gold 6126T)

SPECfp_rate_base2006 = 1120

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

L3 Cache: 19.25 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 800 GB SAS SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	651	1000	652	1000	<u>651</u>	<u>1000</u>	24	318	1030	<u>318</u>	<u>1030</u>	318	1030
416.gamess	48	856	1100	<u>856</u>	<u>1100</u>	856	1100	48	829	1130	829	1130	<u>829</u>	<u>1130</u>
433.milc	48	<u>443</u>	<u>994</u>	443	994	443	994	48	<u>443</u>	<u>994</u>	443	994	443	994
434.zeusmp	48	324	1350	324	1350	<u>324</u>	<u>1350</u>	48	324	1350	324	1350	<u>324</u>	<u>1350</u>
435.gromacs	48	<u>250</u>	<u>1370</u>	245	1400	251	1370	48	248	1380	<u>246</u>	<u>1390</u>	242	1420
436.cactusADM	48	<u>389</u>	<u>1470</u>	389	1480	389	1470	48	<u>389</u>	<u>1470</u>	389	1480	389	1470
437.leslie3d	48	<u>646</u>	<u>698</u>	643	701	648	697	24	<u>300</u>	<u>752</u>	300	752	300	752
444.namd	48	<u>426</u>	<u>904</u>	427	902	425	906	48	420	917	421	913	<u>420</u>	<u>917</u>
447.dealII	48	324	1700	<u>318</u>	<u>1730</u>	317	1730	48	324	1700	<u>318</u>	<u>1730</u>	317	1730
450.soplex	48	<u>560</u>	<u>714</u>	560	715	561	713	24	<u>276</u>	<u>725</u>	277	722	274	729
453.povray	48	167	1530	<u>167</u>	<u>1530</u>	167	1530	48	<u>142</u>	<u>1800</u>	142	1800	142	1800
454.calculix	48	231	1710	<u>232</u>	<u>1710</u>	232	1710	48	231	1710	<u>232</u>	<u>1710</u>	232	1710
459.GemsFDTD	48	803	634	804	634	<u>803</u>	<u>634</u>	24	424	600	<u>425</u>	<u>600</u>	425	600
465.tonto	48	394	1200	395	1200	<u>394</u>	<u>1200</u>	48	378	1250	<u>374</u>	<u>1260</u>	374	1260
470.lbm	48	532	1240	<u>532</u>	<u>1240</u>	532	1240	48	532	1240	<u>532</u>	<u>1240</u>	532	1240
481.wrf	48	451	1190	<u>450</u>	<u>1190</u>	447	1200	48	451	1190	<u>450</u>	<u>1190</u>	447	1200
482.sphinx3	48	890	1050	<u>889</u>	<u>1050</u>	886	1060	48	890	1050	<u>889</u>	<u>1050</u>	886	1060

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Operating Mode set to Maximum Performance
SNC set to Enable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1140

ThinkSystem SR650
(2.60 GHz, Intel Xeon Gold 6126T)

SPECfp_rate_base2006 = 1120

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Platform Notes (Continued)

DCU Streamer Prefetcher set to Disable

Stale AtoS set to Enable

LLC dead line alloc set to Disable

Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on Cyborg-SUT3 Tue Jul 18 05:17:04 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6126T CPU @ 2.60GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 3 4 5 6 8 9 10 11 12 13

physical 1: cores 0 1 3 4 5 6 8 9 10 11 12 13

cache size : 19712 KB

From /proc/meminfo

MemTotal: 395893236 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION_ID="12.2"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux Cyborg-SUT3 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016

(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 17 20:03

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1140

ThinkSystem SR650
(2.60 GHz, Intel Xeon Gold 6126T)

SPECfp_rate_base2006 = 1120

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Platform Notes (Continued)

SPEC is set to: /home/cpu2006-1.2-ic17.0u3

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	445G	9.9G	435G	3%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE109Q-1.00]- 06/28/2017

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1140

ThinkSystem SR650
(2.60 GHz, Intel Xeon Gold 6126T)

SPECfp_rate_base2006 = 1120

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Base Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1140

ThinkSystem SR650
(2.60 GHz, Intel Xeon Gold 6126T)

SPECfp_rate_base2006 = 1120

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -fno-alias -auto-ilp32
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-malloc-options=3
 -qopt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1140

ThinkSystem SR650
(2.60 GHz, Intel Xeon Gold 6126T)

SPECfp_rate_base2006 = 1120

CPU2006 license: 9017

Test date: Jul-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.60 GHz, Intel Xeon Gold 6126T)

SPECfp_rate2006 = 1140

SPECfp_rate_base2006 = 1120

CPU2006 license: 9017

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Oct 4 12:37:34 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2017.