



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## M Computers s.r.o.

HPC S2600WFT  
(2.10 GHz, Intel Xeon Silver 4116)

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 4204


Test Date: Dec-2017

Test Sponsor: M Computers s.r.o.

Hardware Availability: Oct-2017

Tested by: M Computers s.r.o.

Software Availability: Sep-2017

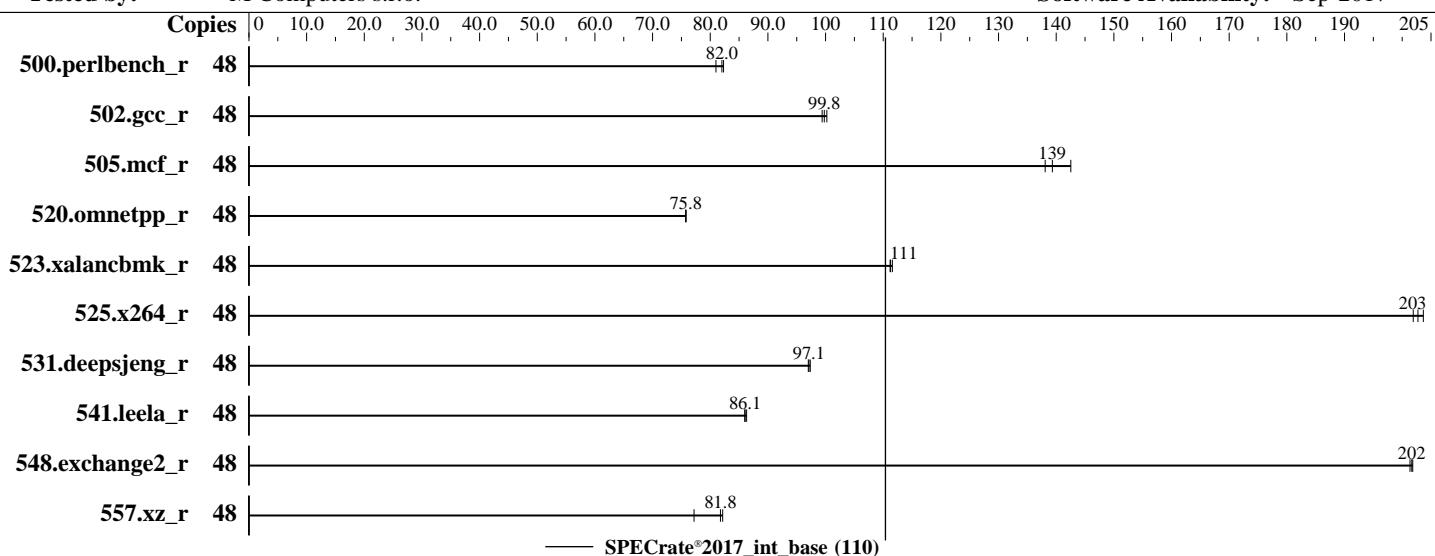

### Hardware

CPU Name: Intel Xeon Silver 4116  
Max MHz: 3000  
Nominal: 2100  
Enabled: 24 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 16.5 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2400V-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### OS:

SUSE Linux Enterprise Server 12 SP2  
4.4.21-69-default

### Compiler:

C/C++: Version 18.0.1 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.1 of Intel Fortran  
Compiler for Linux

### Parallel:

No  
Intel Version SE5C620.86B.00.01.0009.101920170742 released Oct-2017

### Firmware:

xfs

### File System:

Run level 3 (multi-user)

### System State:

64-bit

### Base Pointers:

Not Applicable

### Peak Pointers:

jemalloc: jemalloc memory allocator library  
V5.0.1;

jemalloc: configured and built at default for  
32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4,  
and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or  
releases

### Power Management:

--

### Software

SUSE Linux Enterprise Server 12 SP2  
4.4.21-69-default

C/C++: Version 18.0.1 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.1 of Intel Fortran  
Compiler for Linux

No

Intel Version SE5C620.86B.00.01.0009.101920170742 released Oct-2017

xfs

Run level 3 (multi-user)

64-bit

Not Applicable

jemalloc: jemalloc memory allocator library  
V5.0.1;

jemalloc: configured and built at default for  
32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4,  
and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or  
releases



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**M Computers s.r.o.**

HPC S2600WFT  
(2.10 GHz, Intel Xeon Silver 4116)

**SPECrate®2017\_int\_base = 110**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 4204

Test Date: Dec-2017

Test Sponsor: M Computers s.r.o.

Hardware Availability: Oct-2017

Tested by: M Computers s.r.o.

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	928	82.3	<b>932</b>	<b>82.0</b>	944	81.0							
502.gcc_r	48	<b>681</b>	<b>99.8</b>	684	99.4	678	100							
505.mcf_r	48	<b>557</b>	<b>139</b>	544	143	562	138							
520.omnetpp_r	48	<b>831</b>	<b>75.8</b>	831	75.8	831	75.8							
523.xalancbmk_r	48	<b>456</b>	<b>111</b>	454	112	456	111							
525.x264_r	48	416	202	413	204	<b>415</b>	<b>203</b>							
531.deepsjeng_r	48	<b>566</b>	<b>97.1</b>	565	97.3	567	97.0							
541.leela_r	48	921	86.3	<b>924</b>	<b>86.1</b>	924	86.0							
548.exchange2_r	48	625	201	623	202	<b>624</b>	<b>202</b>							
557.xz_r	48	631	82.2	<b>634</b>	<b>81.8</b>	672	77.2							

**SPECrate®2017\_int\_base = 110**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "\$/opt/intel/compiler\_and\_libraries/linux/lib/ia32\_lin

:\$/opt/intel/compiler\_and\_libraries/linux/lib/intel64\_lin"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## M Computers s.r.o.

HPC S2600WFT  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 4204

Test Sponsor: M Computers s.r.o.

Tested by: M Computers s.r.o.

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = Not Run

Test Date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## General Notes (Continued)

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

BIOS Configuration:

Patrol Scrub=Disabled

CPU and Power Performance Policy=Performance

Set Fan Profile=Performance

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on taborlin3 Fri Dec 29 09:15:42 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 48

On-line CPU(s) list: 0-47

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**M Computers s.r.o.**

HPC S2600WFT  
(2.10 GHz, Intel Xeon Silver 4116)

**SPECrate®2017\_int\_base = 110**

**SPECrate®2017\_int\_peak = Not Run**

**CPU2017 License:** 4204

**Test Date:** Dec-2017

**Test Sponsor:** M Computers s.r.o.

**Hardware Availability:** Oct-2017

**Tested by:** M Computers s.r.o.

**Software Availability:** Sep-2017

## Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 12
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
Stepping: 4
CPU MHz: 800.000
CPU max MHz: 2101.0000
CPU min MHz: 800.0000
BogoMIPS: 4190.17
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0-2,6-8,24-26,30-32
NUMA node1 CPU(s): 3-5,9-11,27-29,33-35
NUMA node2 CPU(s): 12-14,18-20,36-38,42-44
NUMA node3 CPU(s): 15-17,21-23,39-41,45-47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 16896 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 24 25 26 30 31 32
node 0 size: 95302 MB
node 0 free: 94890 MB
node 1 cpus: 3 4 5 9 10 11 27 28 29 33 34 35
node 1 size: 96753 MB
node 1 free: 96304 MB
node 2 cpus: 12 13 14 18 19 20 36 37 38 42 43 44
node 2 size: 96753 MB
node 2 free: 96394 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WFT  
(2.10 GHz, Intel Xeon Silver 4116)

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 4204

Test Date: Dec-2017

Test Sponsor: M Computers s.r.o.

Hardware Availability: Oct-2017

Tested by: M Computers s.r.o.

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node 3 cpus: 15 16 17 21 22 23 39 40 41 45 46 47
node 3 size: 96614 MB
node 3 free: 96251 MB
node distances:
node   0   1   2   3
 0: 10 11 21 21
 1: 11 10 21 21
 2: 21 21 10 11
 3: 21 21 11 10

From /proc/meminfo
MemTotal:      394674040 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux taborlin3 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67) x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Dec 29 09:14

SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      xfs   660G   54G  606G   9%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## M Computers s.r.o.

HPC S2600WFT  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 4204

Test Sponsor: M Computers s.r.o.

Tested by: M Computers s.r.o.

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = Not Run

Test Date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.00.01.0009.101920170742 10/19/2017

Memory:

24x Samsung M393A2G40EB1-CRC 16 GB 2 rank 2400

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
-----
icc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      | 541.leela_r(base)
-----
icpc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
Fortran | 548.exchange2_r(base)
-----
ifort (IFORT) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## M Computers s.r.o.

HPC S2600WFT  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 4204

Test Sponsor: M Computers s.r.o.

Tested by: M Computers s.r.o.

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = Not Run

Test Date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/MComputers-Platform-Settings-SKL-revA.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**M Computers s.r.o.**

HPC S2600WFT  
(2.10 GHz, Intel Xeon Silver 4116)

**SPECrate®2017\_int\_base = 110**

**SPECrate®2017\_int\_peak = Not Run**

**CPU2017 License:** 4204

**Test Date:** Dec-2017

**Test Sponsor:** M Computers s.r.o.

**Hardware Availability:** Oct-2017

**Tested by:** M Computers s.r.o.

**Software Availability:** Sep-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/MComputers-Platform-Settings-SKL-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.2 on 2017-12-29 03:15:41-0500.

Report generated on 2020-02-04 11:55:44 by CPU2017 PDF formatter v6255.

Originally published on 2018-02-28.