



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

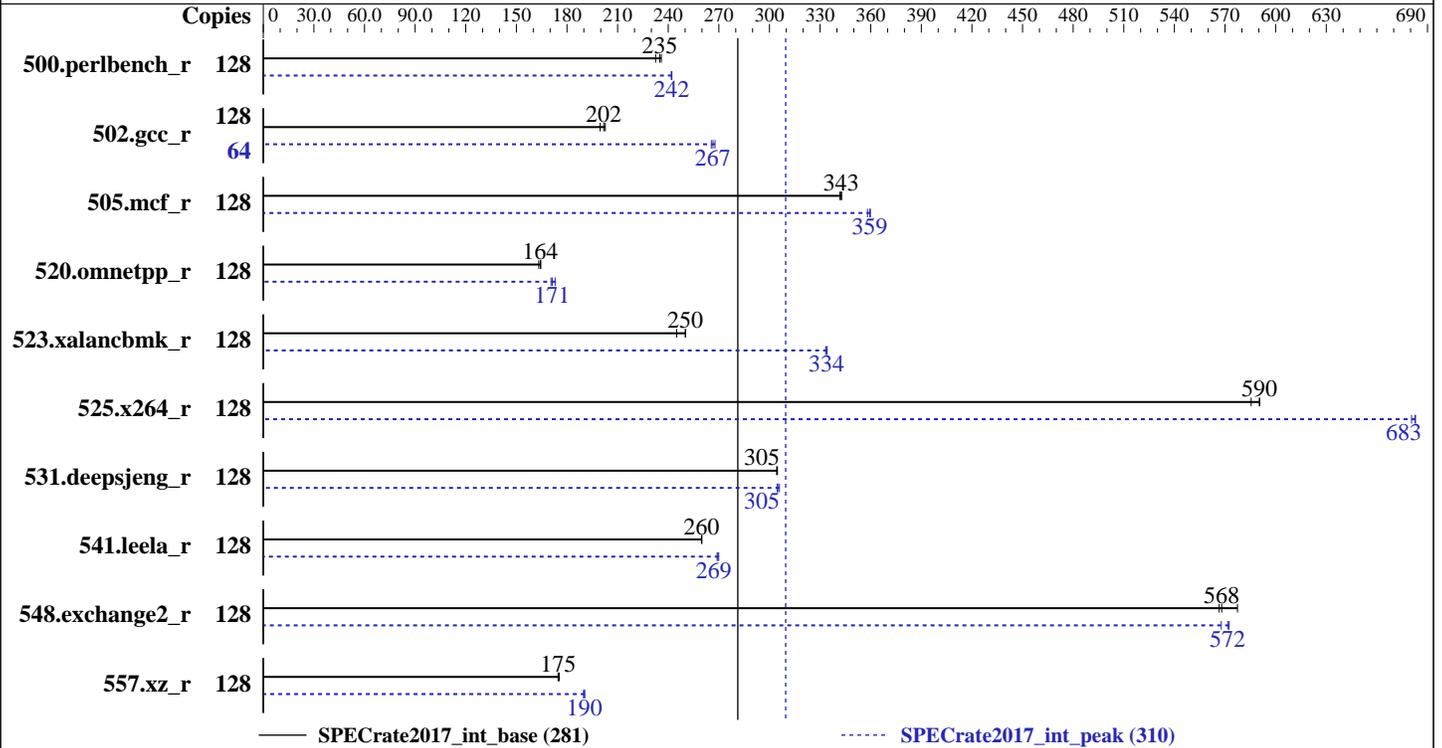

Hardware

CPU Name: AMD EPYC 7601
 Max MHz.: 3200
 Nominal: 2200
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2667V-L)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP3
 Kernel 4.4.114-94.11-default
 Compiler: C/C++: Version 1.0.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: No
 Firmware: Version 0705 released Mar-2018
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc general purpose malloc implementation V4.5.0



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	864	236	876	233	867	235	128	842	242	843	242	842	242
502.gcc_r	128	894	203	908	200	898	202	64	340	267	338	268	341	266
505.mcf_r	128	604	343	604	343	605	342	128	578	358	576	359	575	360
520.omnetpp_r	128	1029	163	1022	164	1021	164	128	980	171	971	173	985	171
523.xalancbmk_r	128	540	250	540	250	552	245	128	405	334	406	333	405	334
525.x264_r	128	380	590	383	585	380	591	128	328	683	329	681	328	683
531.deepsjeng_r	128	482	305	481	305	482	304	128	480	306	482	305	481	305
541.leela_r	128	816	260	815	260	816	260	128	788	269	785	270	787	269
548.exchange2_r	128	592	567	581	577	590	568	128	591	568	586	572	587	572
557.xz_r	128	788	175	791	175	791	175	128	728	190	726	190	726	190

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/spec2017amd/amd1704-rate-libs-revC/64;/spec2017amd/amd1704-rate-libs-revC/32:"  
MALLOCONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOCONF with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use for automatic multiplexing
of threads and arenas.
lg_chunk: set the virtual memory chunk size (log base 2). For example,
lg_chunk:21 sets the default chunk size to $2^{21} = 2\text{MiB}$.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
<http://developer.amd.com/amd-aocc/>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

Sysinfo program /spec2017amd/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-pmm5 Tue May 8 18:39:25 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Platform Notes (Continued)

model name : AMD EPYC 7601 32-Core Processor

2 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 128

On-line CPU(s) list: 0-127

Thread(s) per core: 2

Core(s) per socket: 32

Socket(s): 2

NUMA node(s): 8

Vendor ID: AuthenticAMD

CPU family: 23

Model: 1

Model name: AMD EPYC 7601 32-Core Processor

Stepping: 2

CPU MHz: 2200.000

CPU max MHz: 2200.0000

CPU min MHz: 1200.0000

BogoMIPS: 4399.54

Virtualization: AMD-V

L1d cache: 32K

L1i cache: 64K

L2 cache: 512K

L3 cache: 8192K

NUMA node0 CPU(s): 0-7,64-71

NUMA node1 CPU(s): 8-15,72-79

NUMA node2 CPU(s): 16-23,80-87

NUMA node3 CPU(s): 24-31,88-95

NUMA node4 CPU(s): 32-39,96-103

NUMA node5 CPU(s): 40-47,104-111

NUMA node6 CPU(s): 48-55,112-119

NUMA node7 CPU(s): 56-63,120-127

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm

constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Platform Notes (Continued)

pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
ibpb overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 128825 MB
node 0 free: 128642 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 129021 MB
node 1 free: 128870 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 129021 MB
node 2 free: 128861 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 129021 MB
node 3 free: 128876 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 129021 MB
node 4 free: 128901 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 129021 MB
node 5 free: 128903 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 129021 MB
node 6 free: 128891 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 129019 MB
node 7 free: 128894 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  16  16  16  32  32  32  32
  1:  16  10  16  16  32  32  32  32
  2:  16  16  10  16  32  32  32  32
  3:  16  16  16  10  32  32  32  32
  4:  32  32  32  32  10  16  16  16
  5:  32  32  32  32  16  10  16  16
  6:  32  32  32  32  16  16  10  16
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Platform Notes (Continued)

7: 32 32 32 32 16 16 16 10

From /proc/meminfo

MemTotal: 1056739544 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 3

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION_ID="12.3"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-pmm5 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 8 18:38

SPEC is set to: /spec2017amd

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	873G	15G	857G	2%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0705 03/16/2018

Memory:

16x Micron Technology 72ASS8G72LZ-2G6B2 64 GB 4 rank 2666

16x Unknown Unknown

(End of data from sysinfo program)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Compiler Version Notes

=====
CC 502.gcc_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 523.xalanbmk_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base) 557.xz_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 520.omnetpp_r(base, peak) 523.xalanbmk_r(base) 531.deepsjeng_r(base,
peak) 541.leela_r(base)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 500.perlbench_r(peak) 525.x264_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 541.leela_r(peak)

=====
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
FC 548.exchange2_r(base, peak)

=====
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -mavx -madox -funroll-loops -ffast-math
-z muldefs -Ofast -fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlibm
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
clang gfortran
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

```
502.gcc_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -fgnu89-inline
-D_FILE_OFFSET_BITS=64(*) -ljemalloc
```

```
505.mcf_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

```
523.xalancbmk_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-inline-aggressive -mllvm -unroll-threshold=100
-freemap-arrays -inline-threshold=1000
-D_FILE_OFFSET_BITS=64(*) -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

```
541.leela_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -O3
-mavx2 -madx -funroll-loops -ffast-math -Ofast -fdefault-integer-8
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-enable-iv-split -inline-threshold:1000 -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm
```

(*) Indicates an optimization flag that was found in a portability variable.

Peak Other Flags

C benchmarks:

```
502.gcc_r: -L/root/work/lib/jemalloc/lib32
```

C++ benchmarks:

```
523.xalancbmk_r: -L/root/work/lib/jemalloc/lib32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-z11-V2.0-revA.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-z11-V2.0-revA.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E9(Z11PP-D24) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_int_base = 281

SPECrate2017_int_peak = 310

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-08 06:39:25-0400.

Report generated on 2019-02-21 15:08:01 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-29.