



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

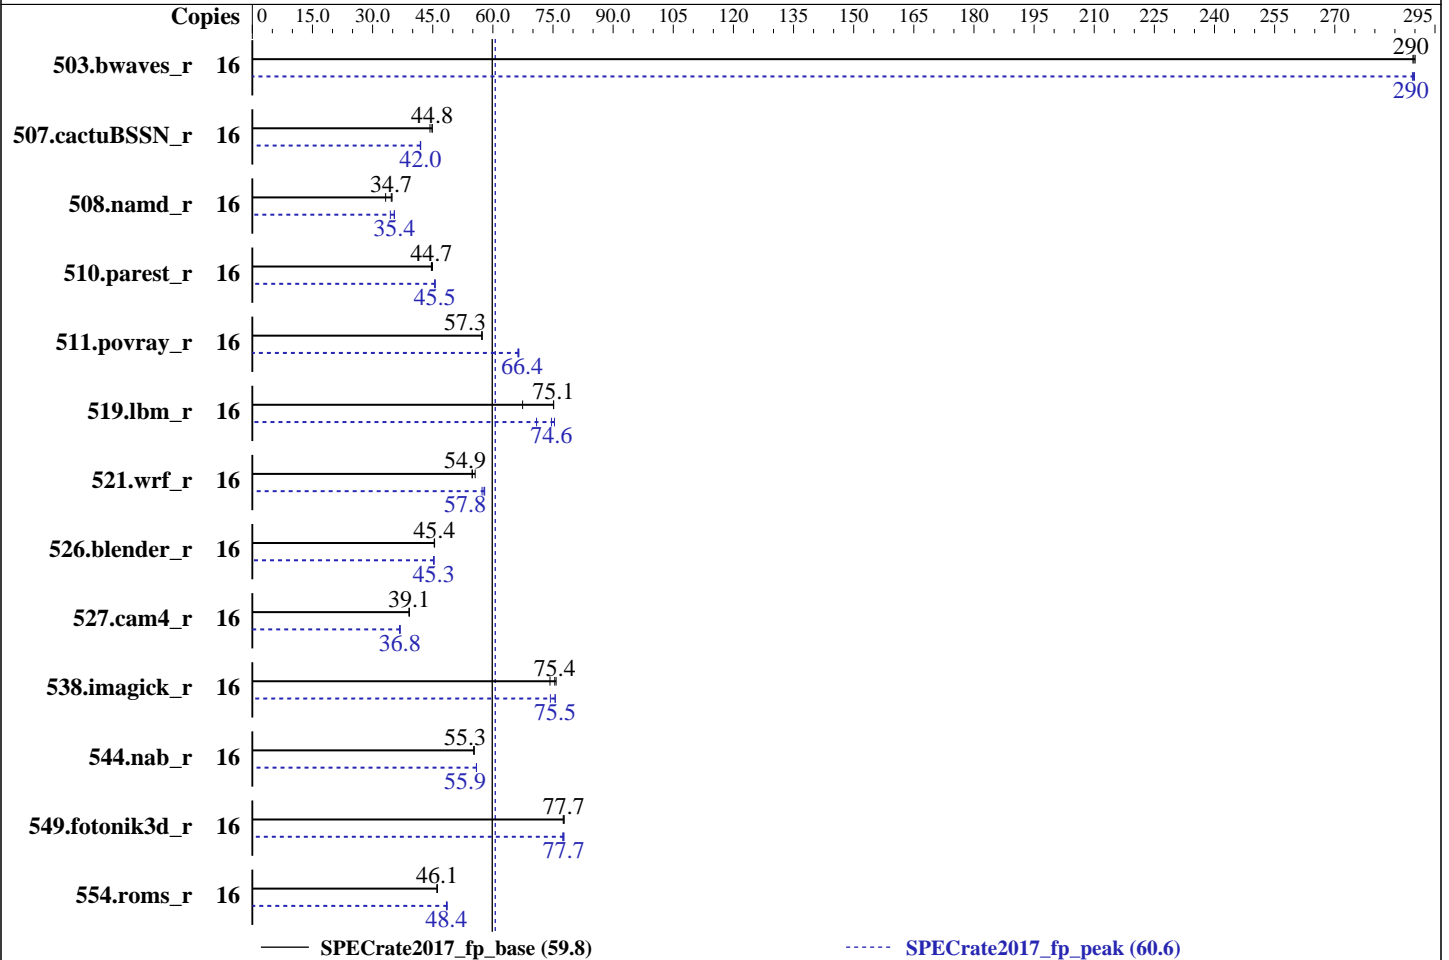

Hardware

CPU Name: Intel Xeon Bronze 3106
 Max MHz.: 1700
 Nominal: 1700
 Enabled: 16 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R, running at 2133)
 Storage: 1 x 800 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.114-92.64-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version IVE113W 1.12 released Feb-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 59.8

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2018
Hardware Availability: Aug-2017
Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	553	290	554	290	554	290	16	554	290	554	289	554	290
507.cactuBSSN_r	16	457	44.3	452	44.8	451	44.9	16	483	42.0	482	42.0	483	41.9
508.namd_r	16	457	33.3	436	34.9	439	34.7	16	429	35.4	442	34.4	429	35.4
510.parest_r	16	931	44.9	937	44.7	936	44.7	16	918	45.6	919	45.5	920	45.5
511.povray_r	16	652	57.3	652	57.3	652	57.3	16	564	66.3	562	66.5	563	66.4
519.lbm_r	16	225	75.1	250	67.4	224	75.2	16	238	70.9	226	74.6	224	75.4
521.wrf_r	16	653	54.9	645	55.6	654	54.8	16	620	57.8	625	57.3	618	58.0
526.blender_r	16	537	45.4	537	45.4	536	45.5	16	539	45.2	538	45.3	538	45.3
527.cam4_r	16	715	39.1	714	39.2	716	39.1	16	760	36.8	759	36.9	762	36.7
538.imagick_r	16	528	75.4	536	74.3	525	75.8	16	527	75.5	527	75.5	535	74.3
544.nab_r	16	487	55.3	487	55.3	487	55.3	16	482	55.9	482	55.9	482	55.9
549.fotonik3d_r	16	802	77.8	803	77.7	804	77.6	16	803	77.7	805	77.4	803	77.7
554.roms_r	16	551	46.2	552	46.1	551	46.1	16	525	48.4	523	48.6	525	48.4

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2018
Hardware Availability: Aug-2017
Software Availability: Feb-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

DCU Streamer Prefetcher set to Disable

SNC set to Disable

MONITOR/MWAIT set to Enable

LLC dead line alloc set to Disable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on SN550 Thu Jun 14 09:11:57 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3106 CPU @ 1.70GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 16

On-line CPU(s) list: 0-15

Thread(s) per core: 1

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Bronze 3106 CPU @ 1.70GHz

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 59.8

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017

Test Date: Jun-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Feb-2018

Platform Notes (Continued)

```
Stepping: 4
CPU MHz: 1696.007
BogoMIPS: 3392.01
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 11264K
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 11264 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 386646 MB
node 0 free: 386138 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 387040 MB
node 1 free: 386527 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal: 792255352 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2018
Hardware Availability: Aug-2017
Software Availability: Feb-2018

Platform Notes (Continued)

```

PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux SN550 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db) x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Jun 14 09:09

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   687G  170G  518G  25% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Lenovo -[IVE113W-1.12]- 02/06/2018
Memory:
24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2133

(End of data from sysinfo program)

```

Compiler Version Notes

```

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 519.lbm_r(peak) 544.nab_r(peak)
-----

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2018
Hardware Availability: Aug-2017
Software Availability: Feb-2018

Compiler Version Notes (Continued)

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

Compiler Version Notes (Continued)

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 554.roms_r(peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 521.wrf_r(base) 527.cam4_r(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 521.wrf_r(peak) 527.cam4_r(peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nonstandard-realloc-lhs -align array32byte

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

Peak Optimization Flags (Continued)

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017_fp_base = 59.8

SPECrate2017_fp_peak = 60.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-13 21:11:55-0400.

Report generated on 2018-10-31 19:03:18 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-10.