



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_fp\_base = 173

SPECspeed2017\_fp\_peak = 174

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Aug-2017

Software Availability: May-2018

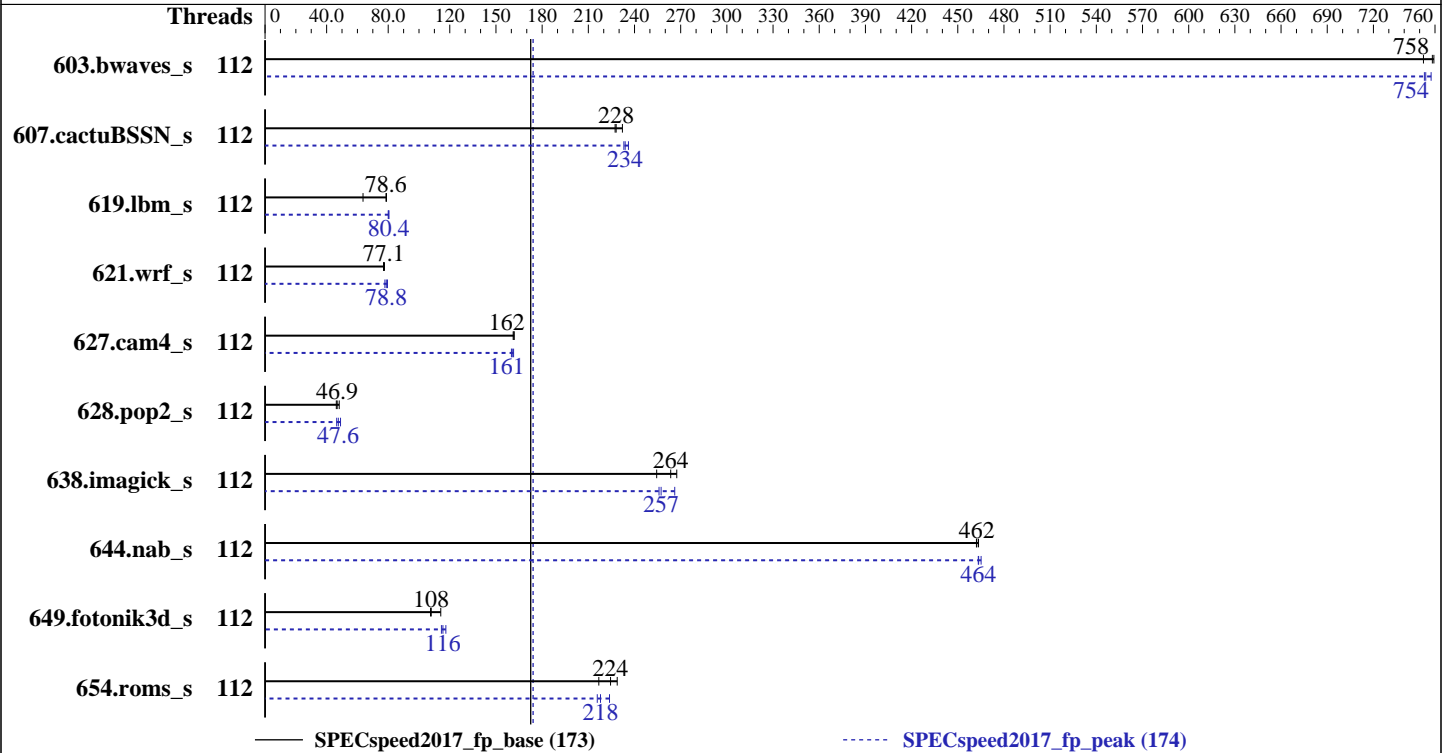

### Hardware

CPU Name: Intel Xeon Platinum 8180M  
 Max MHz.: 3800  
 Nominal: 2500  
 Enabled: 112 cores, 4 chips  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 800 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.121-92.80-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version TEE123N 1.40 released Jun-2018  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_fp\_base = 173

ThinkSystem SR850  
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_fp\_peak = 174

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jul-2018  
Hardware Availability: Aug-2017  
Software Availability: May-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	77.7	759	<b><u>77.8</u></b>	<b><u>758</u></b>	78.4	753	112	<b><u>78.2</u></b>	<b><u>754</u></b>	77.9	757	78.3	753
607.cactuBSSN_s	112	<b><u>73.1</u></b>	<b><u>228</u></b>	71.8	232	73.3	227	112	<b><u>71.3</u></b>	<b><u>234</u></b>	70.6	236	71.5	233
619.lbm_s	112	82.3	63.6	<b><u>66.7</u></b>	<b><u>78.6</u></b>	66.4	78.9	112	65.2	80.4	<b><u>65.2</u></b>	<b><u>80.4</u></b>	65.5	80.0
621.wrf_s	112	170	77.6	<b><u>172</u></b>	<b><u>77.1</u></b>	172	77.0	112	170	77.9	166	79.5	<b><u>168</u></b>	<b><u>78.8</u></b>
627.cam4_s	112	<b><u>54.8</u></b>	<b><u>162</u></b>	55.0	161	54.8	162	112	<b><u>55.2</u></b>	<b><u>161</u></b>	54.9	161	55.4	160
628.pop2_s	112	246	48.2	<b><u>253</u></b>	<b><u>46.9</u></b>	257	46.3	112	255	46.5	242	49.0	<b><u>249</u></b>	<b><u>47.6</u></b>
638.imagick_s	112	56.7	254	<b><u>54.7</u></b>	<b><u>264</u></b>	53.9	267	112	<b><u>56.1</u></b>	<b><u>257</u></b>	56.4	256	54.2	266
644.nab_s	112	37.8	462	<b><u>37.8</u></b>	<b><u>462</u></b>	37.7	463	112	37.6	465	37.7	463	<b><u>37.7</u></b>	<b><u>464</u></b>
649.fotonik3d_s	112	84.8	107	79.9	114	<b><u>84.4</u></b>	<b><u>108</u></b>	112	79.6	115	<b><u>78.9</u></b>	<b><u>116</u></b>	77.6	117
654.roms_s	112	72.6	217	<b><u>70.2</u></b>	<b><u>224</u></b>	68.8	229	112	70.4	224	<b><u>72.3</u></b>	<b><u>218</u></b>	73.0	216

SPECspeed2017\_fp\_base = 173

SPECspeed2017\_fp\_peak = 174

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Custom Mode  
CPU P-state Control set to None

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_fp\_base = 173

SPECspeed2017\_fp\_peak = 174

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** May-2018

### Platform Notes (Continued)

Page Policy set to Adaptive  
C-States set to Legacy  
Energy Efficient Turbo set to Disable  
Platform Controlled Type set to Maximum Performance  
Hyper-Threading set to Disable  
DCU Streamer Prefetcher set to Disable  
Trusted Execution Technology set to Enable  
DCA set to Enable  
LLC dead line alloc set to Enable  
Stale A to S set to Enable  
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-nx6k Mon Jul 16 19:58:25 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz  
4 "physical id"s (chips)  
112 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 28  
siblings : 28  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30  
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30  
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 112  
On-line CPU(s) list: 0-111  
Thread(s) per core: 1  
Core(s) per socket: 28  
Socket(s): 4  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_fp\_base = 173

ThinkSystem SR850  
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_fp\_peak = 174

CPU2017 License: 9017

Test Date: Jul-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

### Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
Stepping: 4
CPU MHz: 2494.141
BogoMIPS: 4988.28
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp ssbd retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 386656 MB
node 0 free: 386180 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 387055 MB
node 1 free: 386419 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 2 size: 387055 MB
node 2 free: 385338 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 387052 MB
node 3 free: 386298 MB
node distances:

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_fp\_base = 173

SPECspeed2017\_fp\_peak = 174

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** May-2018

### Platform Notes (Continued)

node	0	1	2	3
0:	10	21	21	31
1:	21	10	31	21
2:	21	31	10	21
3:	31	21	21	10

From /proc/meminfo

MemTotal: 1584967828 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:  
SUSE Linux Enterprise Server 12 (x86\_64)  
VERSION = 12  
PATCHLEVEL = 2  
# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.

os-release:  
NAME="SLES"  
VERSION="12-SP2"  
VERSION\_ID="12.2"  
PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP2"  
ID="sles"  
ANSI\_COLOR="0;32"  
CPE\_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux linux-nx6k 4.4.121-92.80-default #1 SMP Mon May 21 14:40:10 UTC 2018 (2afdd00)  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jul 16 10:33

SPEC is set to: /home/cpu2017.1.0.2.ic18.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	744G	286G	459G	39%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE123N-1.40]- 06/12/2018  
Memory:  
48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed2017\_fp\_base = 173

ThinkSystem SR850  
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_fp\_peak = 174

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** May-2018

## Compiler Version Notes

=====  
CC 619.lbm\_s(base) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 619.lbm\_s(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 603.bwaves\_s(peak) 649.fotonik3d\_s(peak) 654.roms\_s(peak)  
-----

ifort (IFORT) 18.0.0 20170811  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed2017\_fp\_base = 173

ThinkSystem SR850  
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_fp\_peak = 174

CPU2017 License: 9017

Test Date: Jul-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

```
=====  
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)  
-----
```

```
ifort (IFORT) 18.0.0 20170811
```

```
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
icc (ICC) 18.0.0 20170811
```

```
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 621.wrf_s(peak) 628.pop2_s(peak)  
-----
```

```
ifort (IFORT) 18.0.0 20170811
```

```
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
icc (ICC) 18.0.0 20170811
```

```
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

## Base Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
```

```
607.cactuBSSN_s: -DSPEC_LP64
```

```
619.lbm_s: -DSPEC_LP64
```

```
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
-assume byterecl
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017\_fp\_base = 173

ThinkSystem SR850  
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_fp\_peak = 174

CPU2017 License: 9017

Test Date: Jul-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Base Portability Flags (Continued)

638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP

Fortran benchmarks:

-DSPEC\_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nonstandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-nonstandard-realloc-lhs -align array32byte

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-nonstandard-realloc-lhs -align array32byte

## Base Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11





# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR850  
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_fp\_base = 173

SPECspeed2017\_fp\_peak = 174

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2018

**Hardware Availability:** Aug-2017

**Software Availability:** May-2018

## Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP
```

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017\_fp\_base = 173

ThinkSystem SR850  
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_fp\_peak = 174

CPU2017 License: 9017

Test Date: Jul-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Peak Optimization Flags (Continued)

621.wrf\_s (continued):

```
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

627.cam4\_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

```
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs  
-align array32byte
```

## Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-07-16 07:58:24-0400.

Report generated on 2018-10-31 18:20:16 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-04.