



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Silver 4116, 2.10GHz)

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

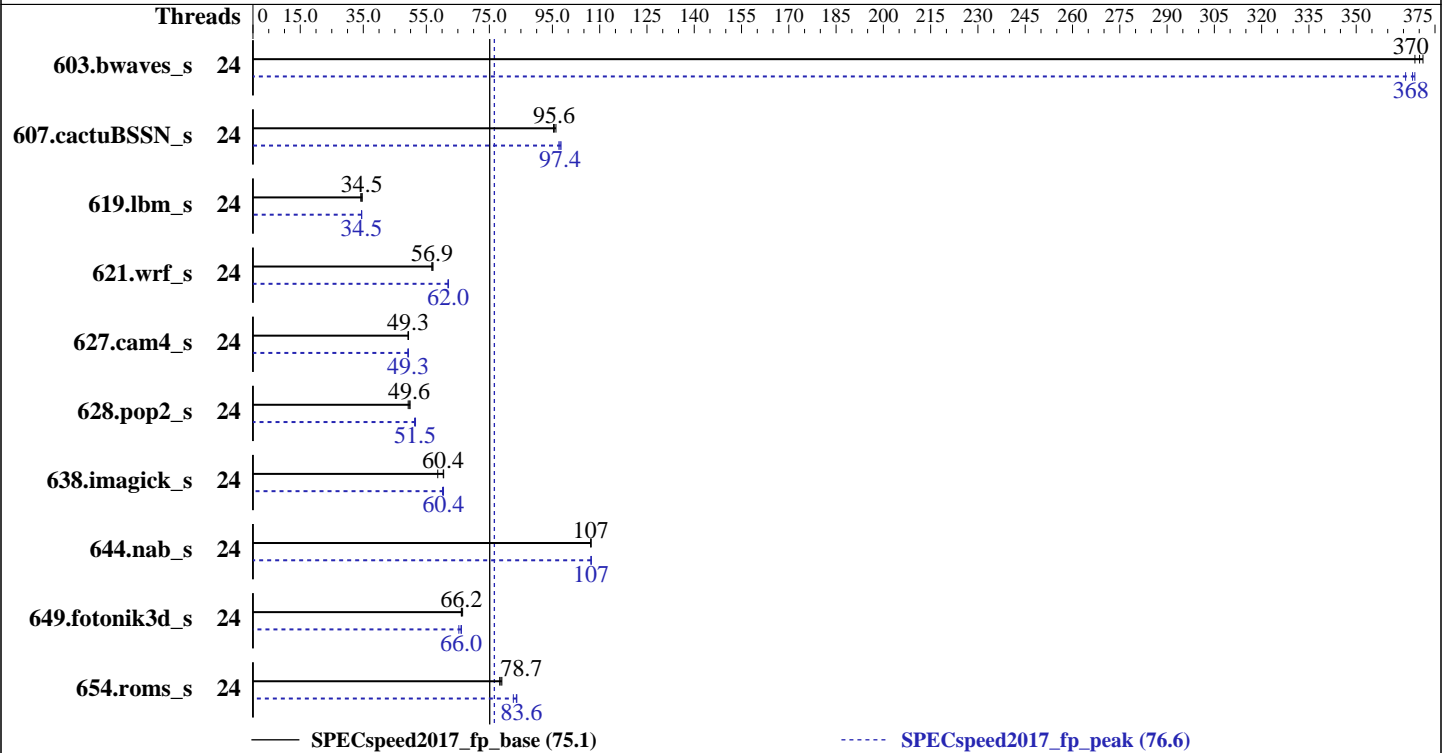

Hardware

CPU Name: Intel Xeon Silver 4116
 Max MHz.: 3000
 Nominal: 2100
 Enabled: 24 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
 Storage: 960 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3
 4.4.114-94.11-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: Yes
 Firmware: Version 0.3.12 released Feb-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Silver 4116, 2.10GHz)

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2018
Hardware Availability: Sep-2018
Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	159	370	160	369	159	371	24	160	368	161	366	160	369
607.cactuBSSN_s	24	175	95.4	173	96.1	174	95.6	24	171	97.7	171	97.4	172	97.1
619.lbm_s	24	151	34.7	152	34.5	153	34.2	24	152	34.5	152	34.5	152	34.4
621.wrf_s	24	232	56.9	233	56.7	232	57.1	24	213	62.0	213	62.0	214	61.9
627.cam4_s	24	180	49.2	180	49.3	180	49.4	24	180	49.3	180	49.3	180	49.2
628.pop2_s	24	241	49.2	238	49.9	239	49.6	24	231	51.5	230	51.6	232	51.3
638.imagick_s	24	246	58.6	238	60.5	239	60.4	24	239	60.4	239	60.5	240	60.1
644.nab_s	24	163	107	163	107	163	107	24	163	107	163	107	163	107
649.fotonik3d_s	24	138	66.2	138	66.1	137	66.5	24	140	65.3	138	66.1	138	66.0
654.roms_s	24	200	78.7	201	78.3	199	79.0	24	191	82.6	188	83.6	188	83.7

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Platform Notes

BIOS settings:

Sub NUMA Cluster Disabled

Virtualization Technology Disabled

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Silver 4116, 2.10GHz)

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Platform Notes (Continued)

System Profile set to Custom
 CPU Performance set to Maximum Performance
 C States set to Autonomous
 C1EE Disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance
 Memory Patrol Scrub Disabled
 Logical Processor Disabled
 CPU Interconnect Bus Link Power Management Disabled
 PCI ASPM L1 Link Power Management Disabled
 Sysinfo program /root/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-kuth Fri Mar 23 14:14:49 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 12

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 24

On-line CPU(s) list: 0-23

Thread(s) per core: 1

Core(s) per socket: 12

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz

Stepping: 4

CPU MHz: 2095.070

BogoMIPS: 4190.14

Virtualization: VT-x

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Silver 4116, 2.10GHz)

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Platform Notes (Continued)

```

L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           16896K
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22
node 0 size: 95354 MB
node 0 free: 90857 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23
node 1 size: 96749 MB
node 1 free: 92890 MB
node distances:
node 0 1
0: 10 21
1: 21 10

```

```

From /proc/meminfo
MemTotal:          196714268 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Silver 4116, 2.10GHz)

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Platform Notes (Continued)

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-kuth 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 23 07:58

SPEC is set to: /root/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   890G  22G  868G   3% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.3.12 02/06/2018

Memory:

```
12x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666, configured at 2400
12x Not Specified Not Specified
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)
```

```
-----  
icc (ICC) 18.0.0 20170811
```

```
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 619.lbm_s(peak)
```

```
-----  
icc (ICC) 18.0.0 20170811
```

```
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Silver 4116,
2.10GHz)

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Compiler Version Notes (Continued)

=====
FC 607.cactuBSSN_s(base)
=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(peak)
=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Silver 4116,
2.10GHz)

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Compiler Version Notes (Continued)

=====
CC 621.wrf_s(peak) 628.pop2_s(peak)
=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Silver 4116,
2.10GHz)

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Base Optimization Flags (Continued)

C benchmarks (continued):

`-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP`

Fortran benchmarks:

`-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

`-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp`

`-nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only`

`-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP`

`-nostandard-realloc-lhs -align array32byte`

Benchmarks using Fortran, C, and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only`

`-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP`

`-nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:

`-m64 -std=c11`

Fortran benchmarks:

`-m64`

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`

Peak Compiler Invocation

C benchmarks:

`icc`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`ifort icc`

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Silver 4116,
2.10GHz)

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP
```

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Silver 4116, 2.10GHz)

SPECspeed2017_fp_base = 75.1

SPECspeed2017_fp_peak = 76.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Peak Optimization Flags (Continued)

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
-align array32byte
```

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-03-23 02:14:48-0400.

Report generated on 2018-10-31 19:03:49 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-16.