



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R740xd2 (Intel Xeon Gold 5115,  
2.40GHz)

**SPECrate2017\_fp\_base = 115**

**SPECrate2017\_fp\_peak = Not Run**

**CPU2017 License:** 55


**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Oct-2018

**Hardware Availability:** Dec-2016

**Software Availability:** Apr-2018

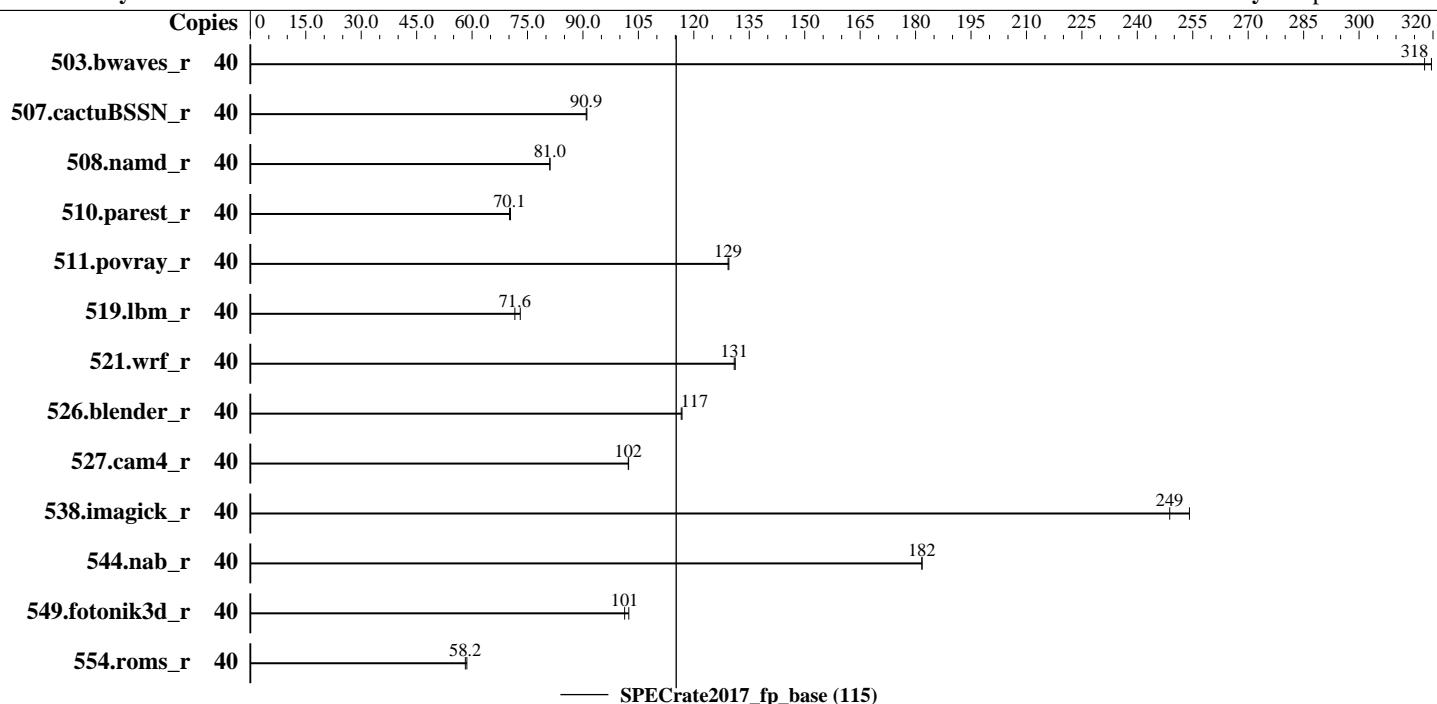

## Hardware

CPU Name: Intel Xeon Gold 5115  
 Max MHz.: 3200  
 Nominal: 2400  
 Enabled: 20 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 13.75 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)  
 Storage: 1 x 250 GB M.2 SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP3  
 kernel 4.4.114-94.11  
 Compiler: C/C++: Version 18.0.2.20180210 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.2.20180210 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.0.2 released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd2 (Intel Xeon Gold 5115,  
2.40GHz)

**SPECrate2017\_fp\_base = 115**

**SPECrate2017\_fp\_peak = Not Run**

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2018

Hardware Availability: Dec-2016

Software Availability: Apr-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	40	<u>1262</u>	<b>318</b>	1255	320									
507.cactusBSSN_r	40	<u>557</u>	<b>90.9</b>	556	91.1									
508.namd_r	40	<u>469</u>	<b>81.0</b>	469	81.1									
510.parest_r	40	1486	70.4	<u>1492</u>	<b>70.1</b>									
511.povray_r	40	721	129	<u>723</u>	<b>129</b>									
519.lbm_r	40	577	73.0	<u>589</u>	<b>71.6</b>									
521.wrf_r	40	683	131	<u>684</u>	<b>131</b>									
526.blender_r	40	522	117	<u>523</u>	<b>117</b>									
527.cam4_r	40	<u>684</u>	<b>102</b>	683	102									
538.imagick_r	40	<u>400</u>	<b>249</b>	392	254									
544.nab_r	40	370	182	<u>371</u>	<b>182</b>									
549.fotonik3d_r	40	<u>1539</u>	<b>101</b>	1522	102									
554.roms_r	40	1085	58.6	<u>1093</u>	<b>58.2</b>									

**SPECrate2017\_fp\_base = 115**

**SPECrate2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd2 (Intel Xeon Gold 5115,  
2.40GHz)

SPECCrate2017\_fp\_base = 115

SPECCrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2018

Hardware Availability: Dec-2016

Software Availability: Apr-2018

## General Notes (Continued)

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

## Platform Notes

BIOS settings:

Virtualization Technology Disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E Disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub Disabled

Logical Processor Enabled

CPU Interconnect Bus Link Power Management Disabled

PCI ASPM L1 Link Power Management Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-m8ku Tue Oct 30 14:56:03 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz

2 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 40

On-line CPU(s) list: 0-39

Thread(s) per core: 2

Core(s) per socket: 10

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd2 (Intel Xeon Gold 5115,  
2.40GHz)

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Oct-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2016

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz  
Stepping: 4  
CPU MHz: 2394.384  
BogoMIPS: 4788.76  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 14080K  
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38  
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb invpcid\_single pln pts dtherm intel\_pt rsb\_ctxsw spec\_ctrl retrpline kaiser tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc pku ospke

/proc/cpuinfo cache data  
cache size : 14080 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38  
node 0 size: 96228 MB  
node 0 free: 95783 MB  
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39  
node 1 size: 96748 MB  
node 1 free: 96390 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 197608068 kB  
HugePages\_Total: 0

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd2 (Intel Xeon Gold 5115,  
2.40GHz)

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2018

Hardware Availability: Dec-2016

Software Availability: Apr-2018

## Platform Notes (Continued)

Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 3
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP3"
    VERSION_ID="12.3"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-m8ku 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

run-level 3 Oct 30 11:14 last=5

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdab4      xfs   182G  4.0G  178G   3%  /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.2 10/19/2018

Memory:

```
12x 002C04B3002C 18ASF2G72PDZ-2G6E1 16 GB 2 rank 2666, configured at 2400
4x Not Specified Not Specified
```

(End of data from sysinfo program)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd2 (Intel Xeon Gold 5115,  
2.40GHz)

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2018

Hardware Availability: Dec-2016

Software Availability: Apr-2018

## Compiler Version Notes

=====

CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

=====

-----  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====

CXXC 508.namd\_r(base) 510.parest\_r(base)

=====

-----  
icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====

CC 511.povray\_r(base) 526.blender\_r(base)

=====

-----  
icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====

FC 507.cactubSSN\_r(base)

=====

-----  
icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====

FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

=====

-----  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

=====

-----  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd2 (Intel Xeon Gold 5115,  
2.40GHz)

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2018

Hardware Availability: Dec-2016

Software Availability: Apr-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd2 (Intel Xeon Gold 5115,  
2.40GHz)

SPECrate2017\_fp\_base = 115

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2018

Hardware Availability: Dec-2016

Software Availability: Apr-2018

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.2018-07-24.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.2018-07-24.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-10-30 15:56:03-0400.

Report generated on 2018-11-27 13:28:55 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.