



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro


SuperServer 4029GP-TRT (X11DPG-OT , Intel Xeon Platinum 8280)

SPECspeed2017\_fp\_base = 160

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Nov-2018

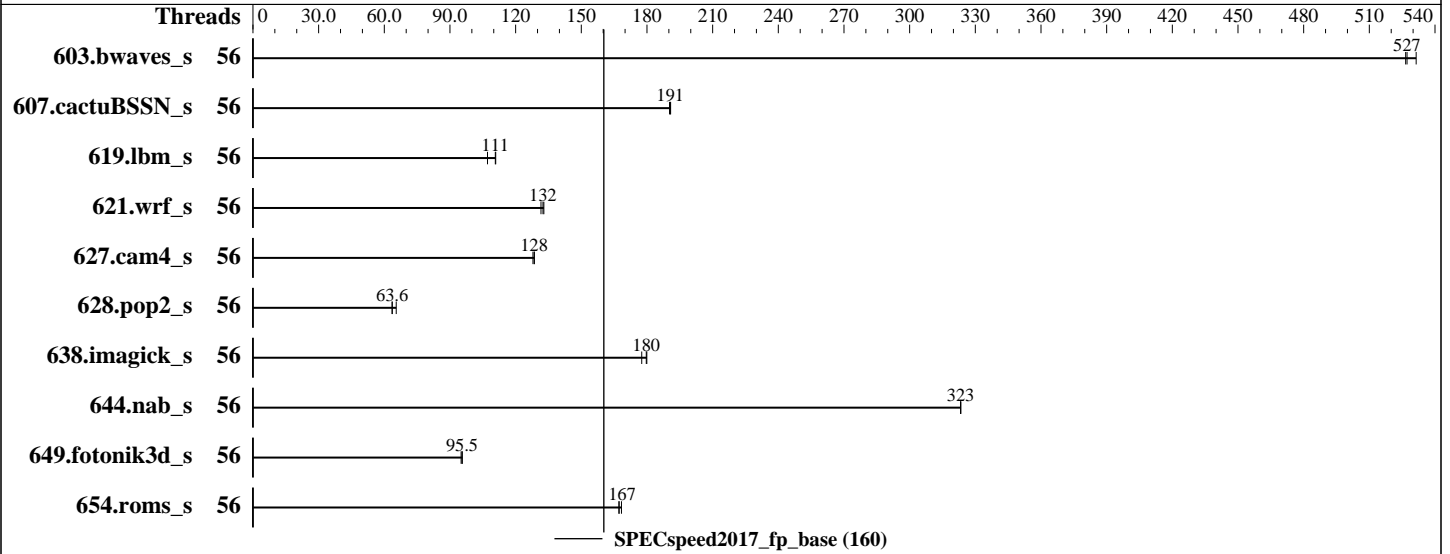

### Hardware

CPU Name: Intel Xeon Platinum 8280  
Max MHz.: 4000  
Nominal: 2700  
Enabled: 56 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 38.5 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 2 TB NVMe SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)  
Kernel 3.10.0-957.el7.x86\_64  
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: Version 3.0a released Feb-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4029GP-TRT (X11DPG-OT , Intel Xeon Platinum 8280)

SPECspeed2017\_fp\_base = 160

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Nov-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	111	531	112	527	<b>112</b>	<b>527</b>							
607.cactuBSSN_s	56	<b>87.4</b>	<b>191</b>	87.4	191	87.6	190							
619.lbm_s	56	<b>47.3</b>	<b>111</b>	47.2	111	48.9	107							
621.wrf_s	56	101	132	99.5	133	<b>99.8</b>	<b>132</b>							
627.cam4_s	56	69.3	128	68.9	129	<b>69.0</b>	<b>128</b>							
628.pop2_s	56	187	63.6	<b>187</b>	<b>63.6</b>	181	65.4							
638.imagick_s	56	80.2	180	81.2	178	<b>80.3</b>	<b>180</b>							
644.nab_s	56	<b>54.0</b>	<b>323</b>	54.0	323	54.0	323							
649.fotonik3d_s	56	95.9	95.1	95.3	95.6	<b>95.4</b>	<b>95.5</b>							
654.roms_s	56	<b>94.1</b>	<b>167</b>	93.5	168	94.2	167							

SPECspeed2017\_fp\_base = 160

SPECspeed2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"
OMP_STACKSIZE = "192M"
```

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Hyper-Threading = Disable

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4029GP-TRT (X11DPG-OT , Intel Xeon Platinum 8280)

SPECspeed2017\_fp\_base = 160

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Nov-2018

### Platform Notes (Continued)

Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance  
Patrol Scrub = Disable  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on localhost.localdomain Fri Mar 15 04:00:08 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 28
  siblings       : 28
 physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
 physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
```

```
From lscpu:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            56
On-line CPU(s) list: 0-55
Thread(s) per core: 1
Core(s) per socket: 28
Socket(s):         2
NUMA node(s):     2
Vendor ID:         GenuineIntel
CPU family:        6
Model:             85
Model name:        Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:         7
CPU MHz:          2701.000
CPU max MHz:       2701.0000
CPU min MHz:       1000.0000
BogoMIPS:          5400.00
Virtualization:    VT-x
L1d cache:        32K
L1i cache:        32K
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4029GP-TRT (X11DPG-OT , Intel Xeon Platinum 8280)

SPECspeed2017\_fp\_base = 160

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Nov-2018

### Platform Notes (Continued)

```

L2 cache:                1024K
L3 cache:                39424K
NUMA node0 CPU(s):      0-27
NUMA node1 CPU(s):      28-55
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdc m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl1c rdrand lahf_lm abm 3dnowprefetch ept cat_l3 cdp_l3 intel_pt ssbd mba
ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni spec_ctrl intel_stibp flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 391844 MB
node 0 free: 381510 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 393216 MB
node 1 free: 381407 MB
node distances:
node    0    1
  0:   10   21
  1:   21   10

```

```

From /proc/meminfo
MemTotal:      791009436 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.6 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4029GP-TRT (X11DPG-OT , Intel Xeon Platinum 8280)

SPECspeed2017\_fp\_base = 160

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Nov-2018

### Platform Notes (Continued)

```
VERSION_ID="7.6"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS
```

```
run-level 3 Mar 15 00:13
```

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 422G 211G 211G 51% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 3.0a 02/20/2019
Memory:
24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
```

```
-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
FC 607.cactuBSSN_s(base)
```

```
-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4029GP-TRT (X11DPG-OT , Intel Xeon Platinum 8280)

SPECspeed2017\_fp\_base = 160

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Nov-2018

### Compiler Version Notes (Continued)

```

Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
=====
CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

```

### Base Compiler Invocation

```

C benchmarks:
icc -m64 -std=c11

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

```



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4029GP-TRT (X11DPG-OT , Intel Xeon Platinum 8280)

SPECspeed2017\_fp\_base = 160

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Nov-2018

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 4029GP-TRT (X11DPG-OT , Intel Xeon Platinum 8280)

SPECspeed2017\_fp\_base = 160

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Nov-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-14 16:00:07-0400.  
Report generated on 2019-04-02 16:59:44 by CPU2017 PDF formatter v6067.  
Originally published on 2019-04-02.