



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017_fp_base = 148

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_peak = 148

CPU2017 License: 9066


Test Date: Apr-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2019

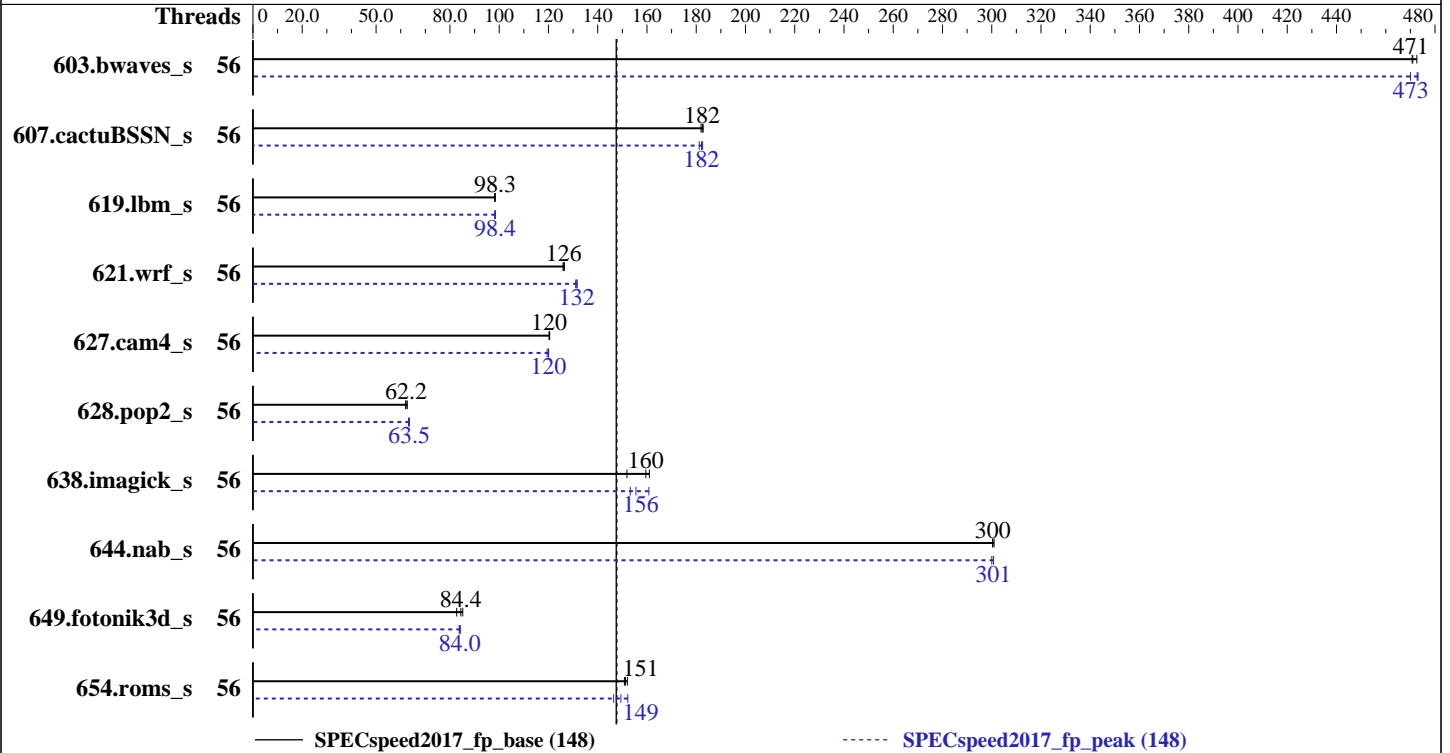

Hardware

CPU Name: Intel Xeon Platinum 8180
 Max MHz.: 3800
 Nominal: 2500
 Enabled: 56 cores, 2 chips
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 960GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)
 3.10.0-957.10.1.el7.x86_64
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
 Parallel: Yes
 Firmware: Version 2.00.25P51 released Apr-2019 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017_fp_base = 148

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_peak = 148

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2019

Hardware Availability: Jul-2017

Software Availability: Apr-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	125	471	125	471	125	473	56	125	473	126	470	125	473
607.cactuBSSN_s	56	91.6	182	91.4	182	91.2	183	56	92.0	181	91.5	182	91.3	183
619.lbm_s	56	53.3	98.2	53.3	98.3	53.2	98.4	56	53.4	98.2	53.2	98.4	53.2	98.4
621.wrf_s	56	105	126	105	126	105	126	56	100	132	101	132	101	131
627.cam4_s	56	73.7	120	73.7	120	73.6	120	56	73.9	120	73.8	120	74.2	119
628.pop2_s	56	189	62.7	192	62.0	191	62.2	56	187	63.5	187	63.5	188	63.2
638.imagick_s	56	95.0	152	90.4	160	89.6	161	56	92.8	156	89.7	161	94.2	153
644.nab_s	56	58.1	301	58.2	300	58.2	300	56	58.1	301	58.2	300	58.1	301
649.fotonik3d_s	56	107	85.2	108	84.4	110	82.7	56	109	83.7	109	84.0	108	84.2
654.roms_s	56	104	151	104	152	104	151	56	103	152	105	149	107	146

SPECspeed2017_fp_base = 148

SPECspeed2017_fp_peak = 148

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/speccpu/lib/ia32:/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-32:/home/speccpu/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Set SNC to Disabled

Set IMC Interleaving to 2-way Interleaving

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017_fp_base = 148

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_peak = 148

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2019

Hardware Availability: Jul-2017

Software Availability: Apr-2019

Platform Notes (Continued)

Set Hyper-Threading to Disabled
 Set XPT Prefetcher to Enabled
 Set Autonomous Core C-State to Enabled
 Set Package C state to No Limit
 Set Intel VT for Directed I/O (VT-d) to Disabled
 Sysinfo program /home/speccpu/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on localhost.localdomain Tue Apr 16 08:10:10 2019

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 28
  siblings     : 28
 physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
 28 29 30
 physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
 28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:   0-55
Thread(s) per core:    1
Core(s) per socket:    28
Socket(s):             2
NUMA node(s):         2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
Stepping:              4
CPU MHz:               1000.061
CPU max MHz:           3800.0000
CPU min MHz:           1000.0000
BogoMIPS:              5000.00
Virtualization:        VT-x
L1d cache:             32K
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017_fp_base = 148

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_peak = 148

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2019

Hardware Availability: Jul-2017

Software Availability: Apr-2019

Platform Notes (Continued)

```

L1i cache:          32K
L2 cache:           1024K
L3 cache:           39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt ssbd mba
ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window
hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp flush_lld

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 195224 MB
node 0 free: 185013 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 196608 MB
node 1 free: 189840 MB
node distances:
node 0 1
0: 10 21
1: 21 10

```

```

From /proc/meminfo
MemTotal:          394622888 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.6 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017_fp_base = 148

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_peak = 148

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2019

Hardware Availability: Jul-2017

Software Availability: Apr-2019

Platform Notes (Continued)

VARIANT_ID="server"

VERSION_ID="7.6"

PRETTY_NAME="OpenShift Enterprise"

redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-957.10.1.el7.x86_64 #1 SMP Thu Feb 7 07:12:53 UTC 2019 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI

CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

run-level 3 Apr 16 03:34

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	839G	88G	752G	11%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.00.25P51 04/04/2019

Memory:

24x Hynix HMA82GR7AFR8N-VK 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

=====
FC 607.cactuBSSN_s(base, peak)
=====

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017_fp_base = 148

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_peak = 148

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2019

Hardware Availability: Jul-2017

Software Availability: Apr-2019

Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 603.bwaves_s(peak) 649.fotonik3d_s(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

CC 621.wrf_s(peak) 628.pop2_s(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017_fp_base = 148

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_peak = 148

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2019

Hardware Availability: Jul-2017

Software Availability: Apr-2019

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
```

```
607.cactuBSSN_s: -DSPEC_LP64
```

```
619.lbm_s: -DSPEC_LP64
```

```
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
-assume byterecl
```

```
638.imagick_s: -DSPEC_LP64
```

```
644.nab_s: -DSPEC_LP64
```

```
649.fotonik3d_s: -DSPEC_LP64
```

```
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
```

```
-nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017_fp_base = 148

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_peak = 148

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2019

Hardware Availability: Jul-2017

Software Availability: Apr-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017_fp_base = 148

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_peak = 148

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2019

Hardware Availability: Jul-2017

Software Availability: Apr-2019

Peak Optimization Flags (Continued)

649.fotonik3d_s: Same as 603.bwaves_s

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-15 20:10:09-0400.

Report generated on 2019-05-15 13:26:44 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.