



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550  
(2.20 GHz, Intel Xeon Silver 4209T)

SPECrate2017\_fp\_base = 93.0

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

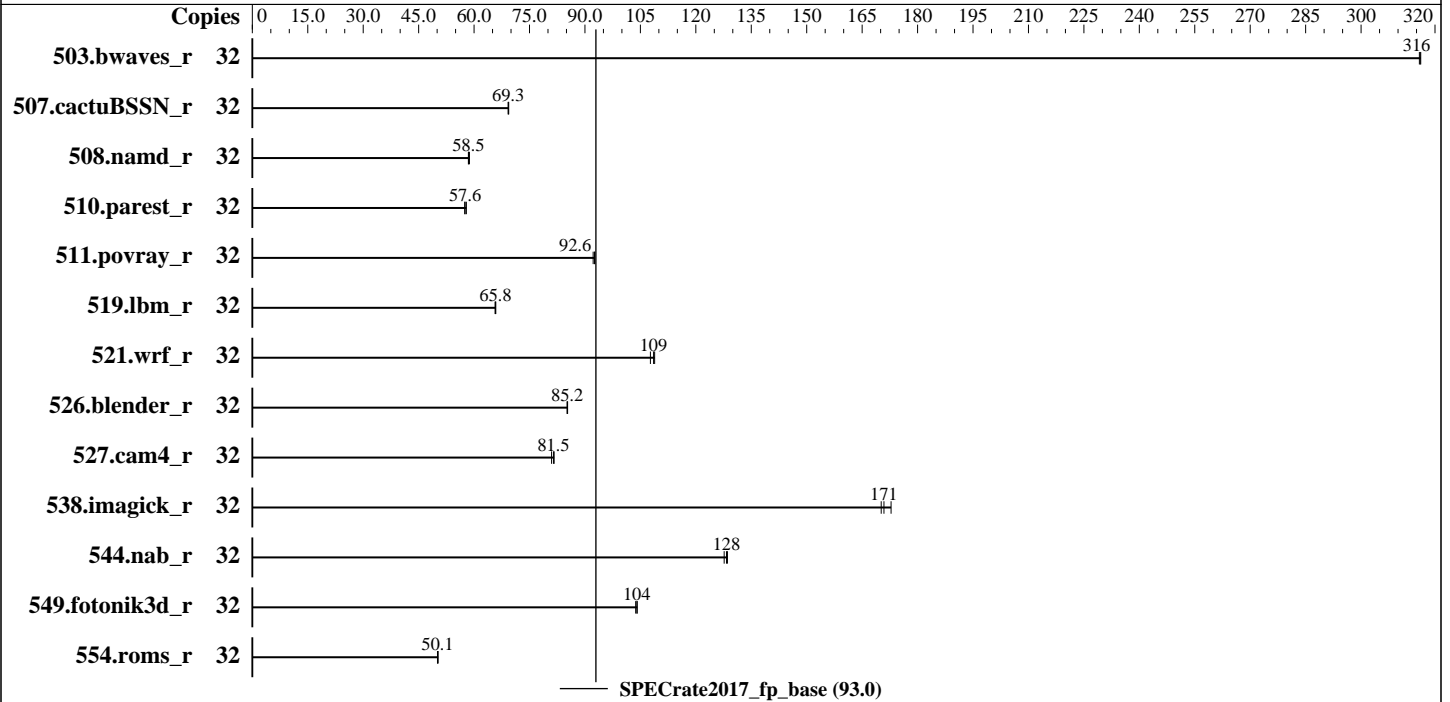

### Hardware

CPU Name: Intel Xeon Silver 4209T  
 Max MHz.: 3200  
 Nominal: 2200  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
 Kernel 4.12.14-25.13-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version IVE135M 2.10 released Jan-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550  
(2.20 GHz, Intel Xeon Silver 4209T)

SPECrate2017\_fp\_base = 93.0

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: May-2019  
Hardware Availability: Apr-2019  
Software Availability: Nov-2018

## Results Table

| Benchmark       | Base   |                   |                    |                   |                    |                    |                    | Peak   |         |       |         |       |         |       |
|-----------------|--------|-------------------|--------------------|-------------------|--------------------|--------------------|--------------------|--------|---------|-------|---------|-------|---------|-------|
|                 | Copies | Seconds           | Ratio              | Seconds           | Ratio              | Seconds            | Ratio              | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r    | 32     | 1016              | 316                | 1015              | 316                | <b><u>1016</u></b> | <b><u>316</u></b>  |        |         |       |         |       |         |       |
| 507.cactuBSSN_r | 32     | 584               | 69.4               | <b><u>585</u></b> | <b><u>69.3</u></b> | 585                | 69.2               |        |         |       |         |       |         |       |
| 508.namd_r      | 32     | <b><u>520</u></b> | <b><u>58.5</u></b> | 520               | 58.5               | 517                | 58.7               |        |         |       |         |       |         |       |
| 510.parest_r    | 32     | 1445              | 57.9               | 1457              | 57.5               | <b><u>1454</u></b> | <b><u>57.6</u></b> |        |         |       |         |       |         |       |
| 511.povray_r    | 32     | 806               | 92.7               | 810               | 92.2               | <b><u>807</u></b>  | <b><u>92.6</u></b> |        |         |       |         |       |         |       |
| 519.lbm_r       | 32     | 514               | 65.7               | <b><u>512</u></b> | <b><u>65.8</u></b> | 512                | 65.9               |        |         |       |         |       |         |       |
| 521.wrf_r       | 32     | 658               | 109                | 665               | 108                | <b><u>660</u></b>  | <b><u>109</u></b>  |        |         |       |         |       |         |       |
| 526.blender_r   | 32     | <b><u>572</u></b> | <b><u>85.2</u></b> | 572               | 85.2               | 571                | 85.3               |        |         |       |         |       |         |       |
| 527.cam4_r      | 32     | 685               | 81.7               | <b><u>687</u></b> | <b><u>81.5</u></b> | 691                | 81.0               |        |         |       |         |       |         |       |
| 538.imagick_r   | 32     | <b><u>466</u></b> | <b><u>171</u></b>  | 468               | 170                | 460                | 173                |        |         |       |         |       |         |       |
| 544.nab_r       | 32     | 422               | 128                | <b><u>420</u></b> | <b><u>128</u></b>  | 419                | 129                |        |         |       |         |       |         |       |
| 549.fotonik3d_r | 32     | 1202              | 104                | 1197              | 104                | <b><u>1199</u></b> | <b><u>104</u></b>  |        |         |       |         |       |         |       |
| 554.roms_r      | 32     | 1011              | 50.3               | 1015              | 50.1               | <b><u>1014</u></b> | <b><u>50.1</u></b> |        |         |       |         |       |         |       |

SPECrate2017\_fp\_base = 93.0

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19.0u1/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 93.0

ThinkSystem SN550  
(2.20 GHz, Intel Xeon Silver 4209T)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2018

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Trusted Execution Technology set to Enable

CPU Frequency Limits set to Restrict Maximum Frequency

Workload Configuration set to I/O Sensitive

sysinfo program /home/cpu2017-1.0.5-ic19.0u1/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-4brr Fri May 10 17:50:16 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4209T CPU @ 2.20GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

On-line CPU(s) list: 0-31

Thread(s) per core: 2

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 93.0

ThinkSystem SN550  
(2.20 GHz, Intel Xeon Silver 4209T)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

### Platform Notes (Continued)

```

CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Silver 4209T CPU @ 2.20GHz
Stepping:             6
CPU MHz:              2200.000
CPU max MHz:          3200.0000
CPU min MHz:          1000.0000
BogoMIPS:             4400.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             11264K
NUMA node0 CPU(s):   0-7,16-23
NUMA node1 CPU(s):   8-15,24-31
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 386661 MB
node 0 free: 380186 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 387016 MB
node 1 free: 386500 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

```

From /proc/meminfo
MemTotal:       792246304 kB
HugePages_Total: 0

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 93.0

ThinkSystem SN550  
(2.20 GHz, Intel Xeon Silver 4209T)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Nov-2018

## Platform Notes (Continued)

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux linux-4brr 4.12.14-25.13-default #1 SMP Tue Aug 14 15:07:35 UTC 2018 (947aa51)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

run-level 3 May 10 17:48

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u1

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 891G 46G 845G 6% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE135M-2.10]- 01/16/2019

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 93.0

ThinkSystem SN550  
(2.20 GHz, Intel Xeon Silver 4209T)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2018

## Compiler Version Notes (Continued)

Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(base) 526.blender\_r(base)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(base)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 93.0

ThinkSystem SN550  
(2.20 GHz, Intel Xeon Silver 4209T)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2018

## Compiler Version Notes (Continued)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactuBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SN550  
(2.20 GHz, Intel Xeon Silver 4209T)

SPECrate2017\_fp\_base = 93.0

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

## Base Portability Flags (Continued)

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml>





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550  
(2.20 GHz, Intel Xeon Silver 4209T)

SPECrate2017\_fp\_base = 93.0

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Nov-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-05-10 05:50:15-0400.

Report generated on 2019-05-29 15:50:31 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-29.