



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate2017_fp_base = 259

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

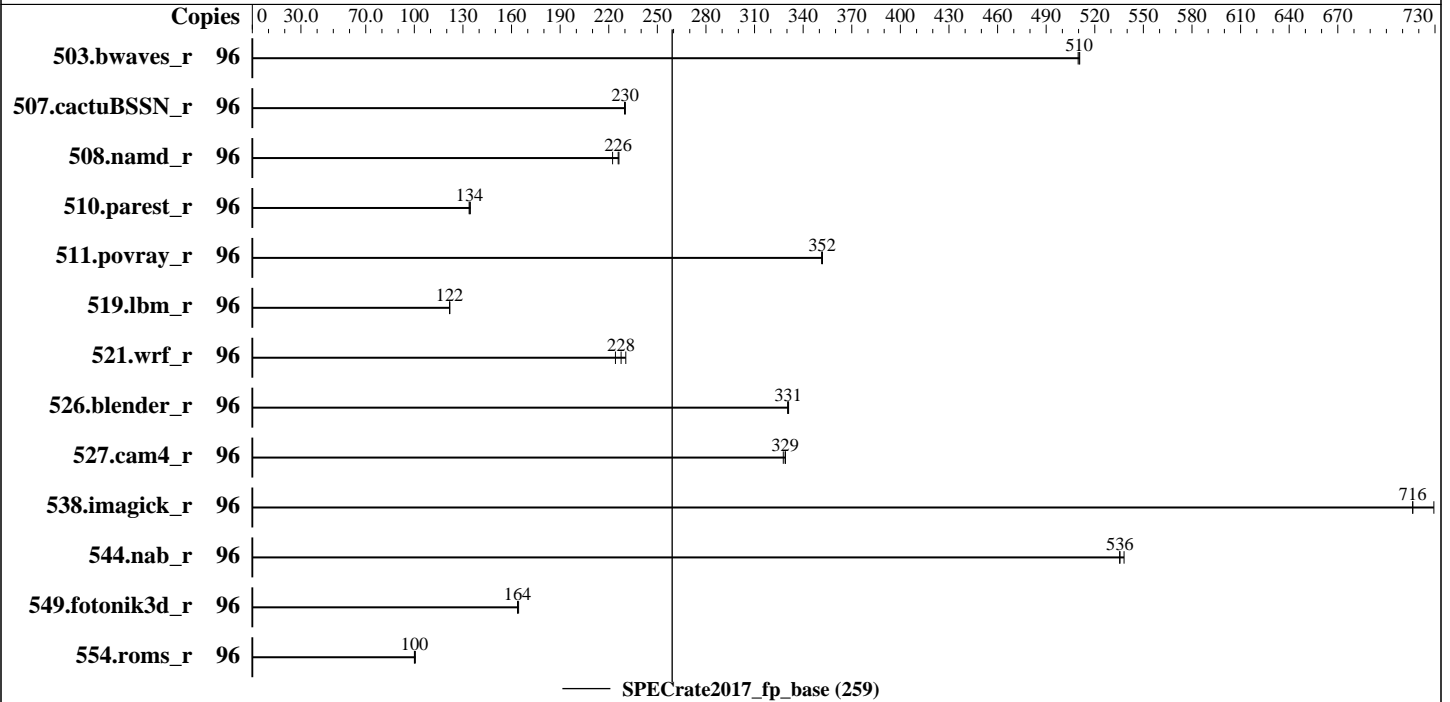

Hardware

CPU Name: Intel Xeon Platinum 8268
 Max MHz.: 3900
 Nominal: 2900
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 Kernel 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.0.117 of Intel
 C/C++
 Compiler for Linux;
 Fortran: Version 19.0.0.117 of
 Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version OTE135R 2.10 released Feb-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 259

ThinkSystem SD650
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1885	511	1886	510	1889	510							
507.cactuBSSN_r	96	528	230	528	230	529	230							
508.namd_r	96	410	222	404	226	403	226							
510.parest_r	96	1866	135	1871	134	1877	134							
511.povray_r	96	637	352	638	351	637	352							
519.lbm_r	96	830	122	831	122	831	122							
521.wrf_r	96	959	224	933	231	945	228							
526.blender_r	96	442	331	442	330	442	331							
527.cam4_r	96	512	328	511	329	510	329							
538.imagick_r	96	327	729	333	716	333	716							
544.nab_r	96	302	535	302	536	300	538							
549.fotonik3d_r	96	2284	164	2285	164	2276	164							
554.roms_r	96	1523	100	1516	101	1525	100							

SPECrate2017_fp_base = 259

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default

Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 259

ThinkSystem SD650
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Choose Operating Mode set to Custom Mode

MONITOR/MWAIT set to Enable

DCU Streamer Prefetcher set to Disable

SNC set to Enable

LLC dead line alloc set to Disable

 Sysinfo program /home/cpu2017-1.0.5-ic19/bin/sysinfo

 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

 running on linux-y34g Sun May 19 15:41:15 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

Thread(s) per core: 2

Core(s) per socket: 24

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 259

ThinkSystem SD650
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):             4
Vendor ID:                GenuineIntel
CPU family:               6
Model:                   85
Model name:               Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
Stepping:                 6
CPU MHz:                  2900.000
CPU max MHz:              3900.0000
CPU min MHz:              1200.0000
BogoMIPS:                 5800.00
Virtualization:           VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 36608K
NUMA node0 CPU(s):       0-3,7-9,13-15,19,20,48-51,55-57,61-63,67,68
NUMA node1 CPU(s):       4-6,10-12,16-18,21-23,52-54,58-60,64-66,69-71
NUMA node2 CPU(s):       24-27,31-33,37-39,43,44,72-75,79-81,85-87,91,92
NUMA node3 CPU(s):       28-30,34-36,40-42,45-47,76-78,82-84,88-90,93-95
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 48 49 50 51 55 56 57 61 62 63 67 68
node 0 size: 96364 MB
node 0 free: 89182 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 52 53 54 58 59 60 64 65 66 69 70 71
node 1 size: 96753 MB
node 1 free: 90381 MB
node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 72 73 74 75 79 80 81 85 86 87 91 92
node 2 size: 96724 MB
node 2 free: 90994 MB

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 259

ThinkSystem SD650
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Platform Notes (Continued)

```

node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 76 77 78 82 83 84 88 89 90 93 94 95
node 3 size: 96750 MB
node 3 free: 91347 MB
node distances:
node 0 1 2 3
0: 10 11 21 21
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10

```

From /proc/meminfo

```

MemTotal: 395870492 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"

```

uname -a:

```

Linux linux-y34g 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

```

run-level 3 May 18 16:43

SPEC is set to: /home/cpu2017-1.0.5-ic19

```

Filesystem Type Size Used Avail Use% Mounted on
/dev/sdb3 xfs 446G 58G 388G 13% /

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 259

ThinkSystem SD650
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[OTE135R-2.10]- 02/25/2019

Memory:

4x NO DIMM NO DIMM

12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 259

ThinkSystem SD650
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 259

ThinkSystem SD650
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate2017_fp_base = 259

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-05-19 15:41:15-0400.

Report generated on 2019-06-11 17:21:58 by CPU2017 PDF formatter v6067.

Originally published on 2019-06-11.