



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(2.40 GHz, Intel Xeon Platinum 8260L)

SPECspeed2017\_fp\_base = 183

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

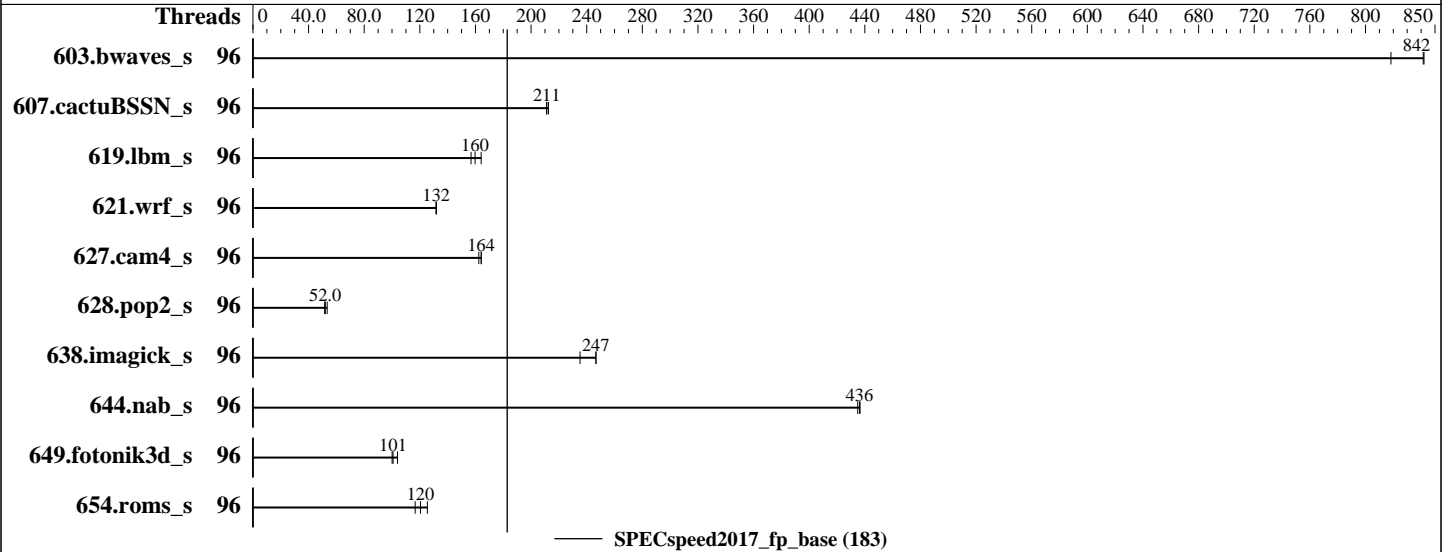

## Hardware

CPU Name: Intel Xeon Platinum 8260L  
 Max MHz.: 3900  
 Nominal: 2400  
 Enabled: 96 cores, 4 chips  
 Orderable: 1, 2, 3, 4 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC4-2933Y-R)  
 Storage: 1 x 400 GB SAS SSD, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
 Kernel 4.12.14-23-default  
 Compiler: C/C++: Version 19.0.2.187 of Intel C/C++  
 Compiler Build 20190117 for Linux;  
 Fortran: Version 19.0.2.187 of Intel Fortran  
 Compiler Build 20190117 for Linux  
 Parallel: Yes  
 Firmware: HPE BIOS Version U34 05/21/2019 released May-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(2.40 GHz, Intel Xeon Platinum 8260L)

SPECspeed2017\_fp\_base = 183

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jul-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	72.1	818	70.1	842	<u>70.1</u>	<u>842</u>							
607.cactuBSSN_s	96	79.0	211	<u>78.9</u>	<u>211</u>	78.5	212							
619.lbm_s	96	33.4	157	<u>32.8</u>	<u>160</u>	31.9	164							
621.wrf_s	96	100	132	100	132	<u>100</u>	<u>132</u>							
627.cam4_s	96	54.6	162	54.0	164	<u>54.0</u>	<u>164</u>							
628.pop2_s	96	222	53.4	<u>228</u>	<u>52.0</u>	230	51.5							
638.imagick_s	96	61.3	235	<u>58.5</u>	<u>247</u>	58.5	247							
644.nab_s	96	40.2	435	<u>40.1</u>	<u>436</u>	40.0	437							
649.fotonik3d_s	96	91.1	100	<u>90.5</u>	<u>101</u>	87.7	104							
654.roms_s	96	<u>131</u>	<u>120</u>	135	117	126	125							

SPECspeed2017\_fp\_base = 183

SPECspeed2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

## General Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017\_u2/lib/ia32:/home/cpu2017\_u2/lib/intel64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:  
Hyper-Threading set to Disabled  
Thermal Configuration set to Maximum Cooling

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(2.40 GHz, Intel Xeon Platinum 8260L)

SPECspeed2017\_fp\_base = 183

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Platform Notes (Continued)

Memory Patrol Scrubbing set to Disabled  
 LLC Prefetch set to Enabled  
 LLC Dead Line Allocation set to Disabled  
 Enhanced Processor Performance set to Enabled  
 Workload Profile set to General Peak Frequency Compute  
 Energy/Performance Bias set to Balanced Power  
 Workload Profile set to Custom  
 Numa Group Size Optimization set to Flat  
 Advanced Memory Protection set to Advanced ECC  
 Sysinfo program /home/cpu2017\_u2/bin/sysinfo  
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
 running on dl580-sles15 Mon Jul 1 20:05:58 2019

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Platinum 8260L CPU @ 2.40GHz
 4 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 24
physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Thread(s) per core:    1
Core(s) per socket:    24
Socket(s):              4
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8260L CPU @ 2.40GHz
Stepping:              6
CPU MHz:               2400.000
BogoMIPS:              4800.00

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(2.40 GHz, Intel Xeon Platinum 8260L)

SPECspeed2017\_fp\_base = 183

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Platform Notes (Continued)

```

Virtualization:      VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           36608K
NUMA node0 CPU(s):  0-23
NUMA node1 CPU(s):  24-47
NUMA node2 CPU(s):  48-71
NUMA node3 CPU(s):  72-95
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
node 0 size: 193088 MB
node 0 free: 192414 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 193531 MB
node 1 free: 193355 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
node 2 size: 193531 MB
node 2 free: 193348 MB
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 193529 MB
node 3 free: 193349 MB
node distances:
node  0  1  2  3
0:  10  21  21  21
1:  21  10  21  21
2:  21  21  10  21
3:  21  21  21  10

```

From /proc/meminfo

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(2.40 GHz, Intel Xeon Platinum 8260L)

SPECspeed2017\_fp\_base = 183

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Platform Notes (Continued)

MemTotal: 792248880 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux dl580-sles15 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

run-level 3 Jul 1 20:05

SPEC is set to: /home/cpu2017\_u2

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 btrfs 371G 89G 281G 25% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE U34 05/21/2019
Memory:
24x UNKNOWN NOT AVAILABLE
24x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933
```

(End of data from sysinfo program)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(2.40 GHz, Intel Xeon Platinum 8260L)

SPECspeed2017\_fp\_base = 183

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Compiler Version Notes

=====  
CC 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(base)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
CC 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(2.40 GHz, Intel Xeon Platinum 8260L)

SPECspeed2017\_fp\_base = 183

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(2.40 GHz, Intel Xeon Platinum 8260L)

SPECspeed2017\_fp\_base = 183

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jul-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range  
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-ic19.0u1-flags-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-ic19.0u1-flags-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-07-01 10:35:57-0400.

Report generated on 2019-07-30 16:35:11 by CPU2017 PDF formatter v6067.

Originally published on 2019-07-30.