



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55


Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2019

Tested by: Dell Inc.

Software Availability: May-2019

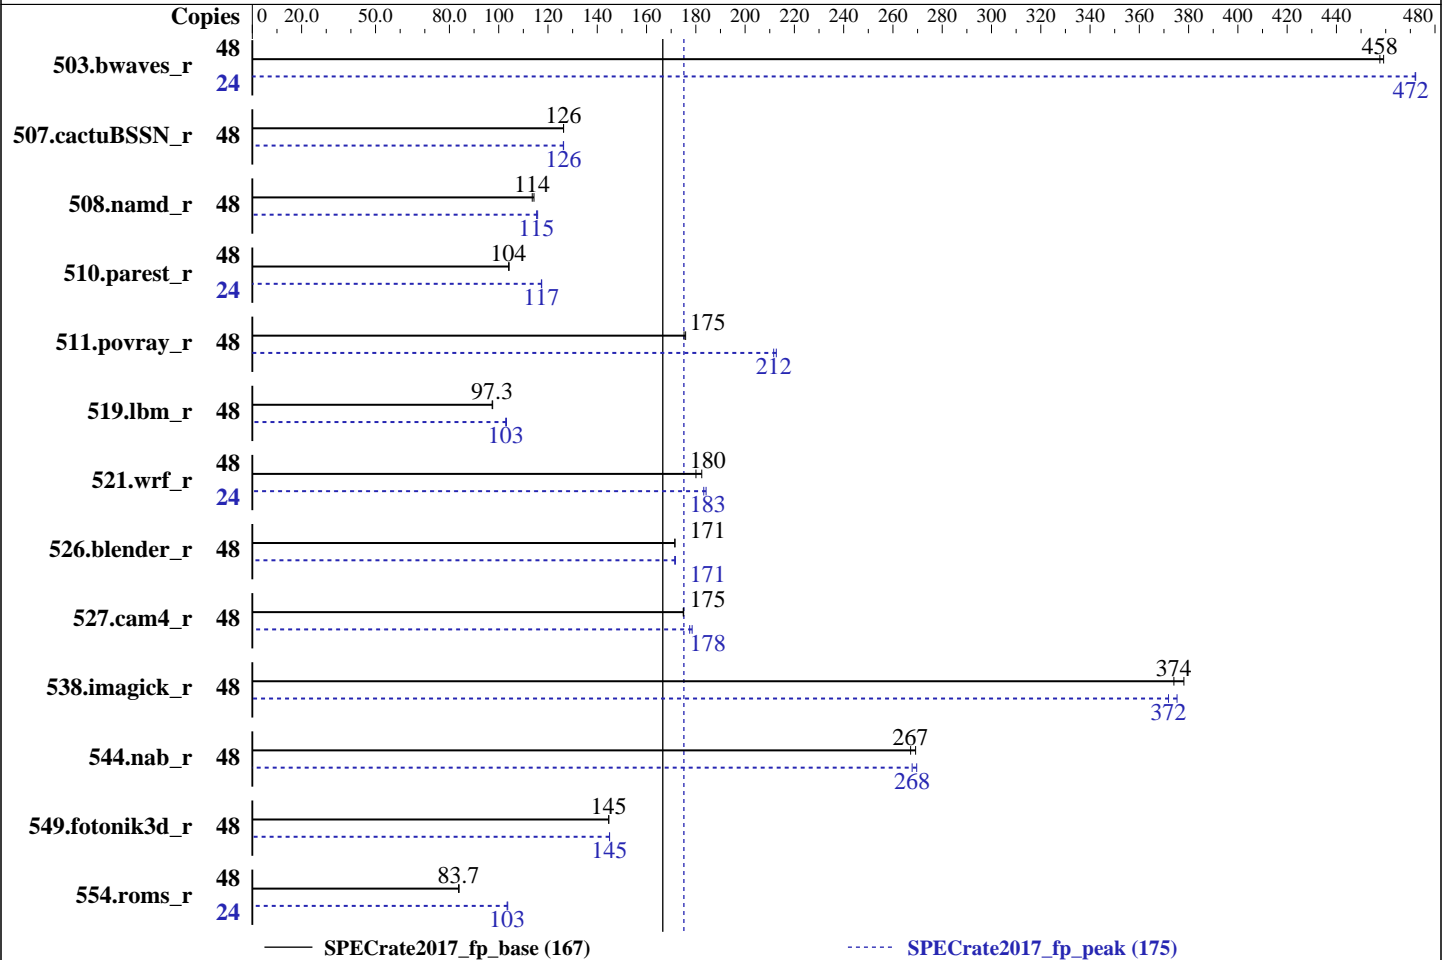

### Hardware

CPU Name: Intel Xeon Gold 6226  
 Max MHz.: 3700  
 Nominal: 2700  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 19.25 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Ubuntu 18.04.2 LTS  
 kernel 4.15.0-45-generic  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 2.2.11 released Jun-2019  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1048	459	<u>1052</u>	<u>458</u>			24	<u>510</u>	<u>472</u>	510	472		
507.cactuBSSN_r	48	<u>481</u>	<u>126</u>	481	126			48	<u>481</u>	<u>126</u>	481	126		
508.namd_r	48	<u>401</u>	<u>114</u>	399	114			48	<u>395</u>	<u>115</u>	394	116		
510.parest_r	48	1205	104	<u>1207</u>	<u>104</u>			24	<u>535</u>	<u>117</u>	535	117		
511.povray_r	48	637	176	<u>640</u>	<u>175</u>			48	<u>530</u>	<u>212</u>	527	213		
519.lbm_r	48	<u>520</u>	<u>97.3</u>	519	97.5			48	<u>492</u>	<u>103</u>	490	103		
521.wrf_r	48	589	182	<u>597</u>	<u>180</u>			24	<u>293</u>	<u>183</u>	292	184		
526.blender_r	48	426	172	<u>426</u>	<u>171</u>			48	<u>426</u>	<u>171</u>	426	172		
527.cam4_r	48	<u>480</u>	<u>175</u>	480	175			48	470	179	<u>473</u>	<u>178</u>		
538.imagick_r	48	<u>319</u>	<u>374</u>	316	378			48	318	375	<u>321</u>	<u>372</u>		
544.nab_r	48	<u>302</u>	<u>267</u>	300	269			48	300	270	<u>302</u>	<u>268</u>		
549.fotonik3d_r	48	1293	145	<u>1293</u>	<u>145</u>			48	<u>1290</u>	<u>145</u>	1290	145		
554.roms_r	48	909	83.9	<u>911</u>	<u>83.7</u>			24	<u>369</u>	<u>103</u>	368	104		

SPECrate2017\_fp\_base = 167

SPECrate2017\_fp\_peak = 175

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"  
Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

## Platform Notes

```
BIOS settings:
ADDDC setting disabled
Sub NUMA Cluster enabled
Virtualization Technology disabled
DCU Streamer Prefetcher disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
ClE disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management enabled
PCI ASPM L1 Link Power Management enabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on intel-sut Wed Jul 17 19:18:13 2019
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6226 CPU @ 2.70GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 12
  siblings  : 24
  physical 0: cores 0 1 2 3 4 5 6 8 10 11 12 14
  physical 1: cores 1 2 3 4 5 6 8 9 10 11 12 13
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 12
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6226 CPU @ 2.70GHz
Stepping: 7
CPU MHz: 1260.207
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx fl6c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 19712 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 95148 MB
node 0 free: 87069 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 96765 MB
node 1 free: 91058 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 2 size: 96765 MB
node 2 free: 91113 MB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

## Platform Notes (Continued)

```
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 96743 MB
node 3 free: 91104 MB
node distances:
node 0 1 2 3
0: 10 21 11 21
1: 21 10 21 11
2: 11 21 10 21
3: 21 11 21 10
```

```
From /proc/meminfo
MemTotal: 394673364 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="18.04.2 LTS (Bionic Beaver)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 18.04.2 LTS"
VERSION_ID="18.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

run-level 5 Jul 17 14:03

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 439G 78G 340G 19% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jul-2019  
Hardware Availability: Jun-2019  
Software Availability: May-2019

## Platform Notes (Continued)

this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.11 06/13/2019

Memory:

12x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

12x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
CC 519.lbm\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

## Compiler Version Notes (Continued)

```
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
CC  511.povray_r(peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
FC  507.cactuBSSN_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
FC  554.roms_r(peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Peak Optimization Flags (Continued)

510.parest\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both C and C++:

511.povray\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

526.blender\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 167

PowerEdge R740xd (Intel Xeon Gold 6226, 2.70GHz)

SPECrate2017\_fp\_peak = 175

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Jul-2019

**Hardware Availability:** Jun-2019

**Software Availability:** May-2019

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-07-17 15:18:13-0400.

Report generated on 2019-08-06 17:58:37 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-06.