



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276)

SPECrate®2017_fp_base = 506

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

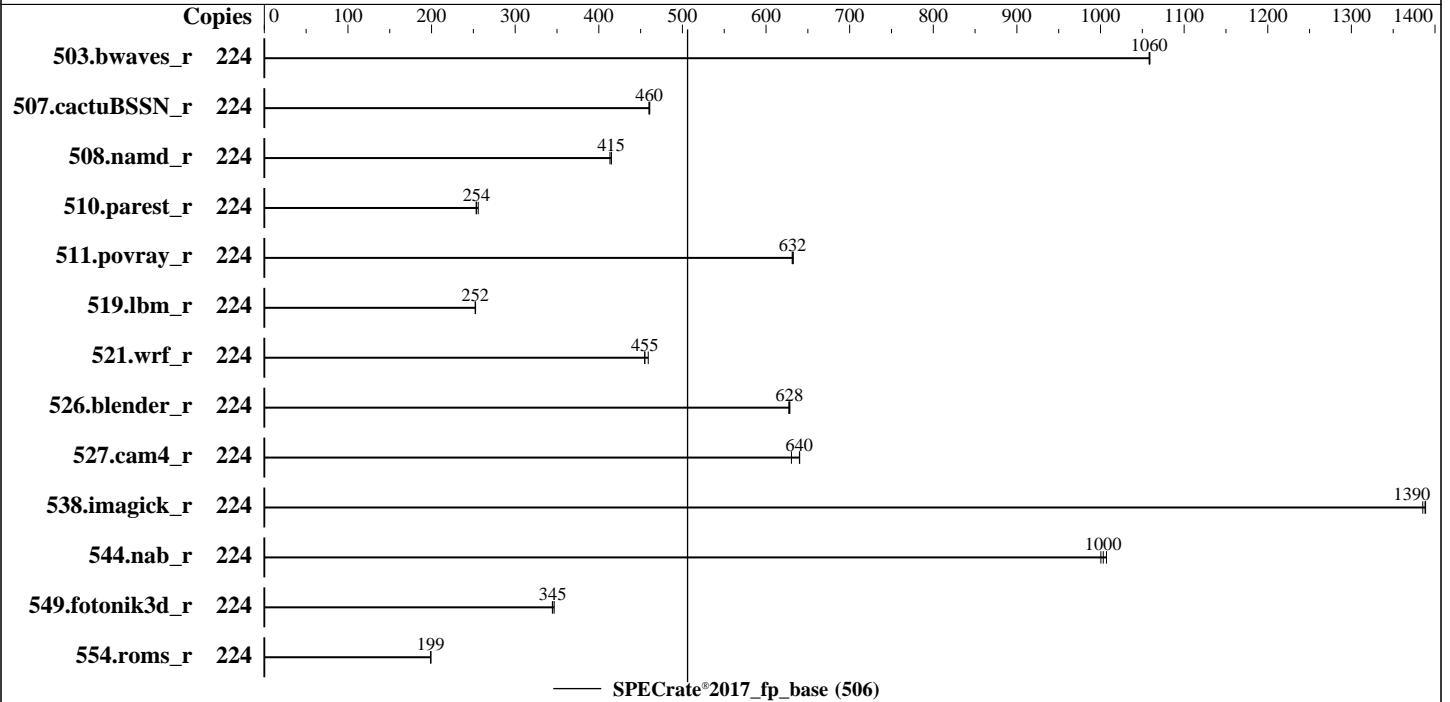

Hardware

CPU Name: Intel Xeon Platinum 8276
 Max MHz: 4000
 Nominal: 2200
 Enabled: 112 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)
 Kernel 3.10.0-957.el7.x86_64
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version IVE142E 2.30 released Aug-2019 tested as IVE141E 2.30 Jul-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 506

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	2121	1060	2123	1060	<u>2122</u>	<u>1060</u>							
507.cactuBSSN_r	224	<u>616</u>	<u>460</u>	615	461	617	460							
508.namd_r	224	515	413	<u>513</u>	<u>415</u>	513	415							
510.parest_r	224	2291	256	2313	253	<u>2308</u>	<u>254</u>							
511.povray_r	224	829	631	827	633	<u>828</u>	<u>632</u>							
519.lbm_r	224	<u>936</u>	<u>252</u>	936	252	935	253							
521.wrf_r	224	1093	459	1103	455	<u>1103</u>	<u>455</u>							
526.blender_r	224	544	627	<u>543</u>	<u>628</u>	543	629							
527.cam4_r	224	621	630	<u>612</u>	<u>640</u>	612	640							
538.imagick_r	224	401	1390	402	1390	<u>401</u>	<u>1390</u>							
544.nab_r	224	377	1000	<u>376</u>	<u>1000</u>	374	1010							
549.fotonik3d_r	224	<u>2531</u>	<u>345</u>	2534	344	2518	347							
554.roms_r	224	1791	199	<u>1788</u>	<u>199</u>	1787	199							

SPECrate®2017_fp_base = 506

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 506

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance
SNC set to Enable
LLC dead line alloc set to Disable
Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Mon Sep 2 16:40:02 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8276 CPU @ 2.20GHz
 4 "physical id"s (chips)
224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 224
On-line CPU(s) list: 0-223
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 506

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

```

Thread(s) per core:      2
Core(s) per socket:     28
Socket(s):               4
NUMA node(s):           8
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Platinum 8276 CPU @ 2.20GHz
Stepping:                6
CPU MHz:                 2200.000
BogoMIPS:                4400.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                39424K
NUMA node0 CPU(s):      0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
NUMA node1 CPU(s):      4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
NUMA node2 CPU(s):      28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
NUMA node3 CPU(s):      32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
NUMA node4 CPU(s):      56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
NUMA node5 CPU(s):      60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
NUMA node6 CPU(s):      84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
NUMA node7 CPU(s):      88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
xtpr pdc m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin intel_pt ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni spec_ctrl intel_stibp flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
129 133 134 135
node 0 size: 196277 MB
node 0 free: 191702 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 506

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

```

132 136 137 138 139
node 1 size: 196608 MB
node 1 free: 192034 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
155 156 157 161 162 163
node 2 size: 196608 MB
node 2 free: 192167 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
159 160 164 165 166 167
node 3 size: 196608 MB
node 3 free: 191382 MB
node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
183 184 185 189 190 191
node 4 size: 196608 MB
node 4 free: 192152 MB
node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
187 188 192 193 194 195
node 5 size: 196608 MB
node 5 free: 192032 MB
node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
210 211 212 213 217 218 219
node 6 size: 196608 MB
node 6 free: 192154 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
209 214 215 216 220 221 222 223
node 7 size: 196608 MB
node 7 free: 192068 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 21 21
  1: 11 10 21 21 21 21 21 21
  2: 21 21 10 11 21 21 21 21
  3: 21 21 11 10 21 21 21 21
  4: 21 21 21 21 10 11 21 21
  5: 21 21 21 21 11 10 21 21
  6: 21 21 21 21 21 21 10 11
  7: 21 21 21 21 21 21 11 10

```

```

From /proc/meminfo
MemTotal:      1584958284 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.6 (Maipo)"

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 506

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

```

ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.6"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS

run-level 3 Sep 2 16:38

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   839G  24G  815G   3% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Lenovo -[IVE141E-2.30]- 07/02/2019
  Memory:
    48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

```

Compiler Version Notes

```

=====
C          | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 506

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 506

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactuBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```




SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 506

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-02 04:40:02-0400.

Report generated on 2019-10-01 14:28:07 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.