



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 13.8

Express5800/T110j (Intel Pentium Gold G5420)

SPECspeed®2017_fp_peak = 14.9

CPU2017 License: 9006


Test Date: Nov-2019

Test Sponsor: NEC Corporation

Hardware Availability: Nov-2019

Tested by: NEC Corporation

Software Availability: Aug-2019

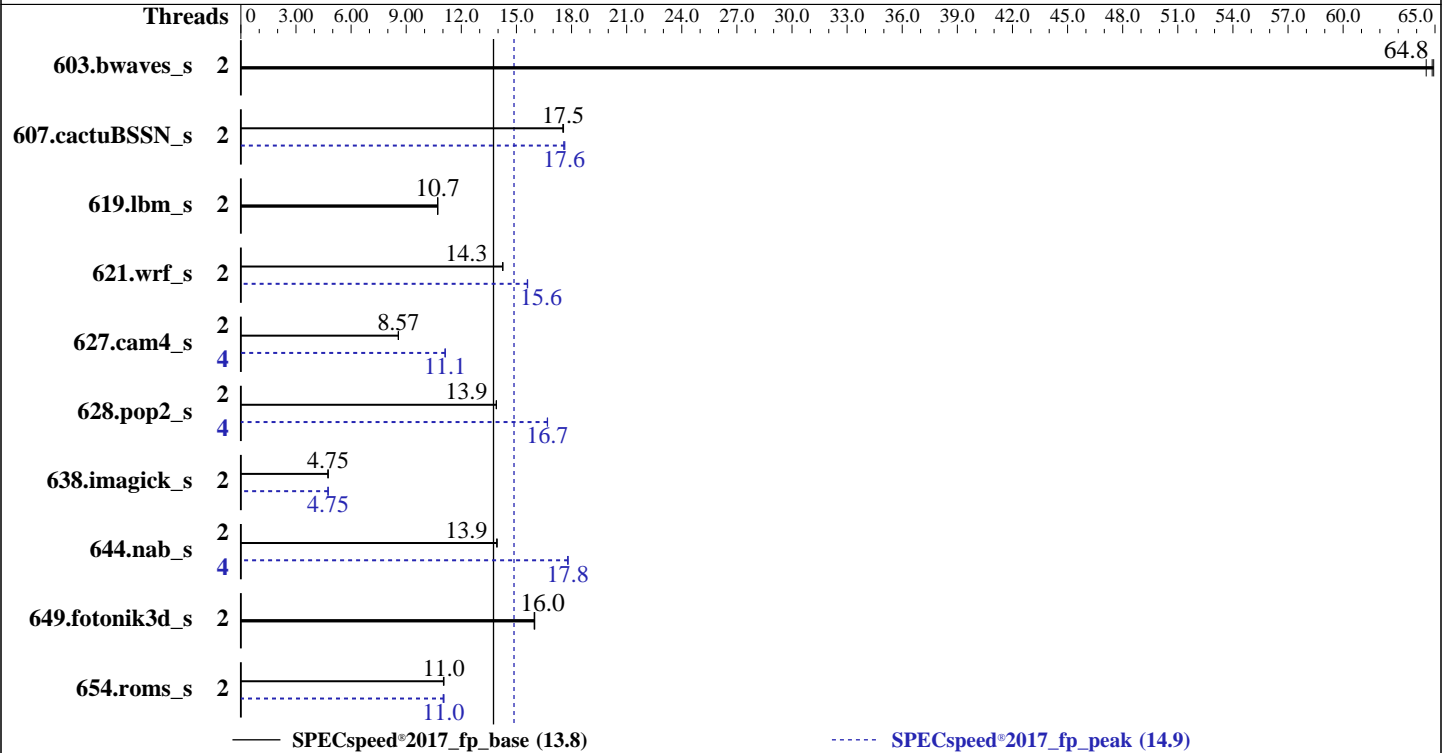

Hardware

CPU Name: Intel Pentium Gold G5420
 Max MHz: 3800
 Nominal: 3800
 Enabled: 2 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 4 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400)
 Storage: 1 x 2 TB SATA, 7200 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.7 (Maipo)
 Kernel 3.10.0-1062.el7.x86_64
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++ Compiler Build 20180804 for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran Compiler Build 20180804 for Linux
 Parallel: Yes
 Firmware: NEC BIOS Version F01 08/21/2019 released Nov-2019
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 13.8

Express5800/T110j (Intel Pentium Gold G5420)

SPECspeed®2017_fp_peak = 14.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	2	909	64.9	910	64.8	914	64.5	2	909	64.9	910	64.8	914	64.5
607.cactuBSSN_s	2	950	17.5	951	17.5	949	17.6	2	948	17.6	945	17.6	948	17.6
619.lbm_s	2	489	10.7	489	10.7	489	10.7	2	489	10.7	489	10.7	489	10.7
621.wrf_s	2	928	14.3	928	14.3	928	14.3	2	847	15.6	848	15.6	848	15.6
627.cam4_s	2	1034	8.57	1034	8.57	1033	8.58	4	797	11.1	797	11.1	797	11.1
628.pop2_s	2	854	13.9	854	13.9	853	13.9	4	711	16.7	712	16.7	711	16.7
638.imagick_s	2	3038	4.75	3041	4.74	3040	4.75	2	3041	4.74	3038	4.75	3036	4.75
644.nab_s	2	1254	13.9	1253	13.9	1254	13.9	4	981	17.8	982	17.8	982	17.8
649.fotonik3d_s	2	571	16.0	570	16.0	570	16.0	2	571	16.0	570	16.0	570	16.0
654.roms_s	2	1428	11.0	1425	11.0	1426	11.0	2	1424	11.1	1427	11.0	1430	11.0

SPECspeed®2017_fp_base = **13.8**

SPECspeed®2017_fp_peak = **14.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECSpeed®2017_fp_base = 13.8

Express5800/T110j (Intel Pentium Gold G5420)

SPECSpeed®2017_fp_peak = 14.9

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Platform Notes

BIOS Settings:

VT-x: Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on t110j Fri Nov 1 12:21:07 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Pentium(R) Gold G5420 CPU @ 3.80GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 2

siblings : 4

physical 0: cores 0 1

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 4

On-line CPU(s) list: 0-3

Thread(s) per core: 2

Core(s) per socket: 2

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

Model name: Intel(R) Pentium(R) Gold G5420 CPU @ 3.80GHz

Stepping: 11

CPU MHz: 3694.934

CPU max MHz: 3800.0000

CPU min MHz: 800.0000

BogoMIPS: 7584.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 256K

L3 cache: 4096K

NUMA node0 CPU(s): 0-3

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 13.8

Express5800/T110j (Intel Pentium Gold G5420)

SPECspeed®2017_fp_peak = 14.9

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16
xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand
lahf_lm abm 3dnowprefetch epb intel_pt ssbd ibrs ibpb stibp tpr_shadow vmmi
flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap
clflushopt xsaveopt xsavec xgetbv1 dtherm arat pln pts hwp hwp_notify hwp_act_window
hwp_epp md_clear spec_ctrl intel_stibp flush_lld
```

```
/proc/cpuinfo cache data
cache size : 4096 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 65441 MB
node 0 free: 63566 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 65880068 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server
```

```
uname -a:
Linux t110j 3.10.0-1062.el7.x86_64 #1 SMP Thu Jul 18 20:25:13 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 13.8

Express5800/T110j (Intel Pentium Gold G5420)

SPECspeed®2017_fp_peak = 14.9

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full retpoline, IBPB

run-level 3 Nov 1 12:15

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	1.8T	41G	1.7T	3%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. F01 08/21/2019

Memory:

4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
  | 644.nab_s(base, peak)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
=====

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 13.8

Express5800/T110j (Intel Pentium Gold G5420)

SPECspeed®2017_fp_peak = 14.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Compiler Version Notes (Continued)

| 654.roms_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
628.pop2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 13.8

Express5800/T110j (Intel Pentium Gold G5420)

SPECspeed®2017_fp_peak = 14.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Base Portability Flags (Continued)

644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:

-DSPEC_OPENMP -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte

Benchmarks using Fortran, C, and C++:

-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte

Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 13.8

Express5800/T110j (Intel Pentium Gold G5420)

SPECspeed®2017_fp_peak = 14.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: -DSPEC_OPENMP -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3
-qopenmp -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xSSE4.2
-qopt-prefetch -ipo -O3 -no-prec-div -ffinite-math-only
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

627.cam4_s: -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 13.8

Express5800/T110j (Intel Pentium Gold G5420)

SPECspeed®2017_fp_peak = 14.9

CPU2017 License: 9006

Test Date: Nov-2019

Test Sponsor: NEC Corporation

Hardware Availability: Nov-2019

Tested by: NEC Corporation

Software Availability: Aug-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevE.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-10-31 23:21:07-0400.

Report generated on 2019-11-26 12:48:24 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.