



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Dell Inc)

PowerEdge T440 (Intel Xeon Bronze 3206R, 1.90 GHz)

**SPECSpeed®2017\_int\_base = 4.84**

**SPECSpeed®2017\_int\_peak = 4.92**

CPU2017 License: 55


**Test Date:** Sep-2020

**Test Sponsor:** Dell Inc

**Hardware Availability:** Jul-2020

**Tested by:** Dell Inc.

**Software Availability:** Apr-2020

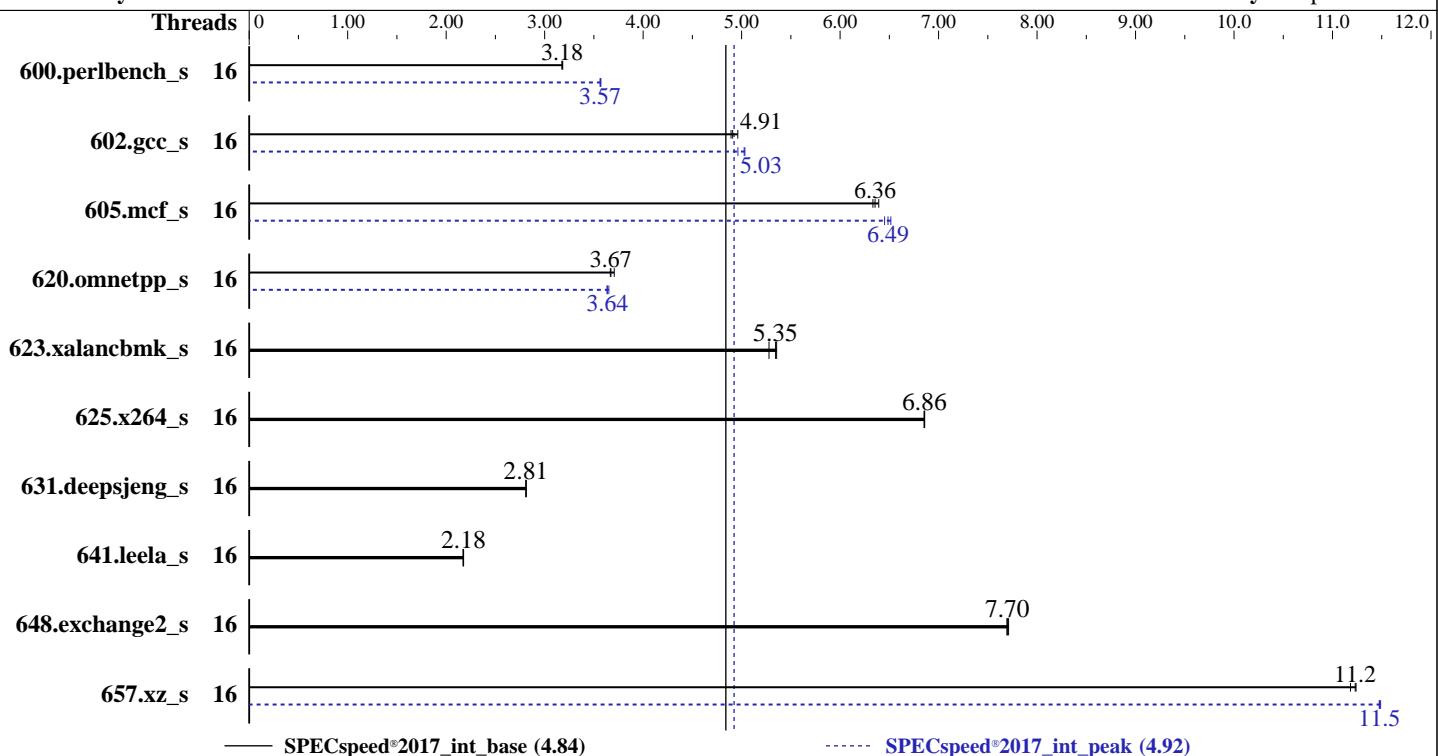

## Hardware

CPU Name: Intel Xeon Bronze 3206R  
 Max MHz: 1900  
 Nominal: 1900  
 Enabled: 16 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R,  
 running at 2133)  
 Storage: 1 x 1.92TB SATA SSD  
 Other: None

## Software

OS: Red Hat Enterprise Linux 8.1  
 Compiler: kernel 4.18.0-147.el8.x86\_64  
 C/C++: Version 19.0.5.281 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.5.281 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Version 2.8.1 released Jun-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Dell Inc)

**SPECspeed®2017\_int\_base = 4.84**

**SPECspeed®2017\_int\_peak = 4.92**

CPU2017 License: 55

Test Sponsor: Dell Inc

Tested by: Dell Inc.

Test Date: Sep-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	558	3.18	559	3.18	<b>559</b>	<b>3.18</b>	16	498	3.56	497	3.57	<b>498</b>	<b>3.57</b>		
602.gcc_s	16	814	4.89	<b>811</b>	<b>4.91</b>	803	4.96	16	802	4.96	791	5.03	<b>792</b>	<b>5.03</b>		
605.mcf_s	16	745	6.33	738	6.39	<b>743</b>	<b>6.36</b>	16	732	6.45	725	6.52	<b>728</b>	<b>6.49</b>		
620.omnetpp_s	16	445	3.67	<b>444</b>	<b>3.67</b>	440	3.71	16	449	3.63	<b>448</b>	<b>3.64</b>	447	3.65		
623.xalancbmk_s	16	<b>265</b>	<b>5.35</b>	268	5.28	265	5.36	16	<b>265</b>	<b>5.35</b>	268	5.28	265	5.36		
625.x264_s	16	257	6.86	257	6.85	<b>257</b>	<b>6.86</b>	16	257	6.86	257	6.85	<b>257</b>	<b>6.86</b>		
631.deepsjeng_s	16	<b>510</b>	<b>2.81</b>	510	2.81	509	2.81	16	<b>510</b>	<b>2.81</b>	510	2.81	509	2.81		
641.leela_s	16	786	2.17	784	2.18	<b>784</b>	<b>2.18</b>	16	786	2.17	784	2.18	<b>784</b>	<b>2.18</b>		
648.exchange2_s	16	382	7.69	<b>382</b>	<b>7.70</b>	381	7.71	16	382	7.69	<b>382</b>	<b>7.70</b>	381	7.71		
657.xz_s	16	550	11.2	553	11.2	<b>550</b>	<b>11.2</b>	16	538	11.5	539	11.5	<b>539</b>	<b>11.5</b>		
SPECspeed®2017_int_base =				<b>4.84</b>				SPECspeed®2017_int_peak =				<b>4.92</b>				

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.  
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Dell Inc)

PowerEdge T440 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECspeed®2017\_int\_base = 4.84

SPECspeed®2017\_int\_peak = 4.92

CPU2017 License: 55

Test Sponsor: Dell Inc

Tested by: Dell Inc.

Test Date: Sep-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## General Notes (Continued)

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub set to standard

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

UPI Prefetch disabled

LLC Prefetch disabled

Dead Line LLC Alloc enabled

Directory AtoS disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Thu Sep 17 10:53:27 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Dell Inc)

PowerEdge T440 (Intel Xeon Bronze 3206R, 1.90 GHz)

**SPECspeed®2017\_int\_base = 4.84**

**SPECspeed®2017\_int\_peak = 4.92**

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc

**Tested by:** Dell Inc.

**Test Date:** Sep-2020

**Hardware Availability:** Jul-2020

**Software Availability:** Apr-2020

## Platform Notes (Continued)

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 1
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
Stepping: 7
CPU MHz: 1883.204
CPU max MHz: 1900.0000
CPU min MHz: 1000.0000
BogoMIPS: 3800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 11264K
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpf perf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpn rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 11264 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14
node 0 size: 192076 MB
node 0 free: 190207 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Dell Inc)

PowerEdge T440 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECspeed®2017\_int\_base = 4.84

SPECspeed®2017\_int\_peak = 4.92

CPU2017 License: 55

Test Sponsor: Dell Inc

Tested by: Dell Inc.

Test Date: Sep-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

```
node 1 cpus: 1 3 5 7 9 11 13 15
node 1 size: 193508 MB
node 1 free: 192056 MB
node distances:
node    0    1
 0: 10 21
 1: 21 10

From /proc/meminfo
MemTotal:      394838340 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

uname -a:
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:            Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swapgs barriers and __user
                                                pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB: conditional,
                                                RSB filling

run-level 3 Sep 16 13:43 last=5

SPEC is set to: /home/cpu2017
Filesystem           Type  Size  Used Avail Use% Mounted on
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Dell Inc)

PowerEdge T440 (Intel Xeon Bronze 3206R, 1.90 GHz)

**SPECspeed®2017\_int\_base = 4.84**

**SPECspeed®2017\_int\_peak = 4.92**

CPU2017 License: 55

Test Sponsor: Dell Inc

Tested by: Dell Inc.

**Test Date:** Sep-2020

**Hardware Availability:** Jul-2020

**Software Availability:** Apr-2020

## Platform Notes (Continued)

```
/dev/mapper/rhel-home xfs 1.7T 29G 1.7T 2% /home
```

```
From /sys/devices/virtual/dmi/id
  BIOS: Dell Inc. 2.8.1 06/30/2020
  Vendor: Dell Inc.
  Product: PowerEdge T440
  Product Family: PowerEdge
  Serial: FBLH613
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
4x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
8x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
4x Not Specified Not Specified
```

(End of data from sysinfo program)

Memory running at 2133

## Compiler Version Notes

```
=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
  | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====
```

```
=====
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
  | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====
```

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran | 648.exchange2_s(base, peak)
=====
```

```
=====
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Dell Inc)

**SPECspeed®2017\_int\_base = 4.84**

**SPECspeed®2017\_int\_peak = 4.92**

PowerEdge T440 (Intel Xeon Bronze 3206R, 1.90 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc

Tested by: Dell Inc.

Test Date: Sep-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/jetson-tx2/lib -ljemalloc

C++ benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Dell Inc.)

PowerEdge T440 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECspeed®2017\_int\_base = 4.84

SPECspeed®2017\_int\_peak = 4.92

CPU2017 License: 55

Test Sponsor: Dell Inc

Tested by: Dell Inc.

Test Date: Sep-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)  
-prof-use(pass 2) -O2 -xCORE-AVX2  
-qopt-mem-layout-trans=4 -ipo -O3 -no-prec-div  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)  
-prof-use(pass 2) -O2 -xCORE-AVX2  
-qopt-mem-layout-trans=4 -ipo -O3 -no-prec-div  
-DSPEC_SUPPRESS_OPENMP -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
605.mcf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)  
-prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Dell Inc)

PowerEdge T440 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECspeed®2017\_int\_base = 4.84

SPECspeed®2017\_int\_peak = 4.92

CPU2017 License: 55

Test Sponsor: Dell Inc

Tested by: Dell Inc.

Test Date: Sep-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

625.x264\_s: basepeak = yes

```
657.xz_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
           -prof-use(pass 2) -O2 -xCORE-AVX2
           -qopt-mem-layout-trans=4 -ipo -O3 -no-prec-div
           -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
           -L/usr/local/jet5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
               -ipo -xCORE-AVX2 -O3 -no-prec-div
               -qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP
               -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
               -lqkmalloc
```

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.html](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-09-17 11:53:26-0400.

Report generated on 2020-10-14 09:22:22 by CPU2017 PDF formatter v6255.

Originally published on 2020-10-13.